

SLED9122SF LUMINARIA LINEAR DE SOBREPOR 2x2 11Wm 2700K 95 1M



Fluxo luminoso – 467 lm/m

Potência – 11,5 W/m

Intensidade pico – 164cd

CCT – 2752K




IRC – 96,9

Coordenada CIE 1931 – x- 0,459 y- 0,416

Data do ensaio

29/08/2024 14:27:41

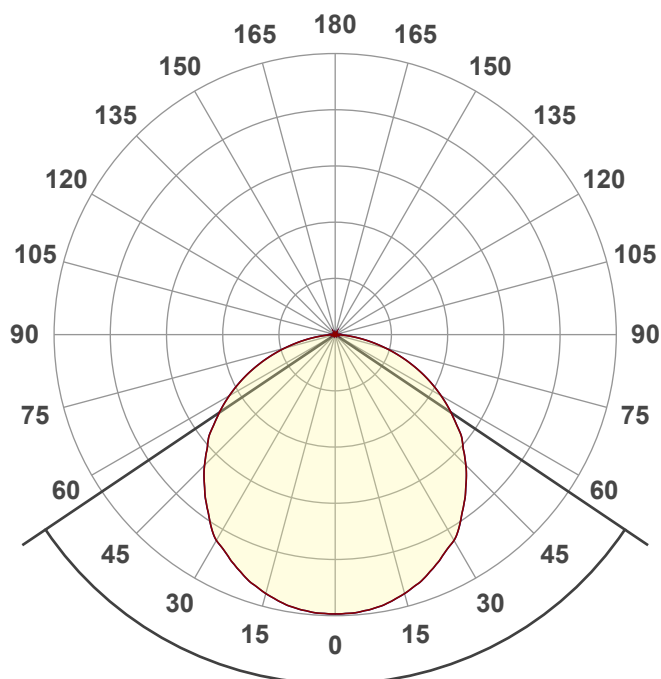

Facho de abertura

112,1°


Rf 94,1



Fidelity index Rf

Rg 98,5


Gamut index Rg

		Shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	95	-2%	0%
2	97	-1%	0%
3	96	-1%	0%
4	94	-4%	-1%
5	95	-3%	1%
6	97	-1%	2%
7	94	-3%	3%
8	97	0%	2%
9	94	-1%	3%
10	92	1%	5%
11	92	2%	5%
12	93	4%	-1%
13	94	1%	-5%
14	92	2%	-6%
15	94	-2%	-1%
16	90	-1%	-8%

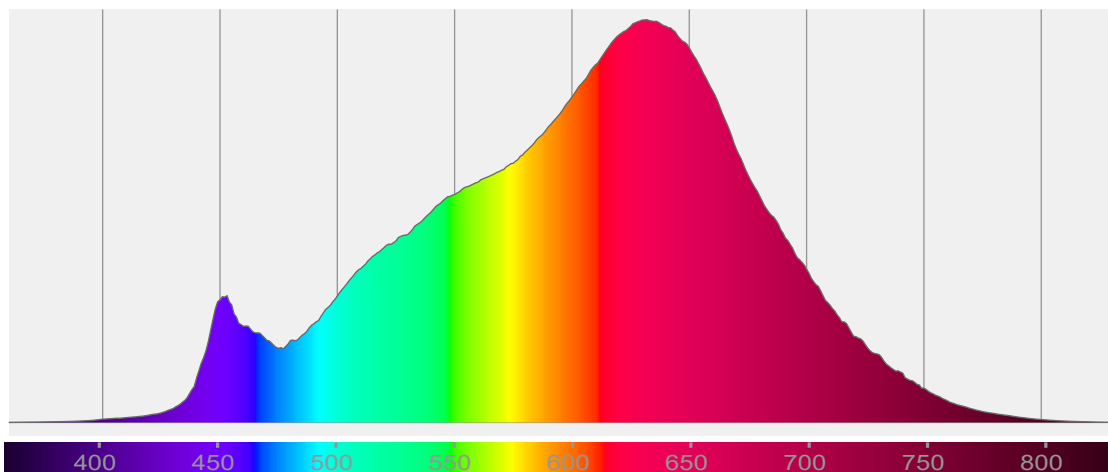


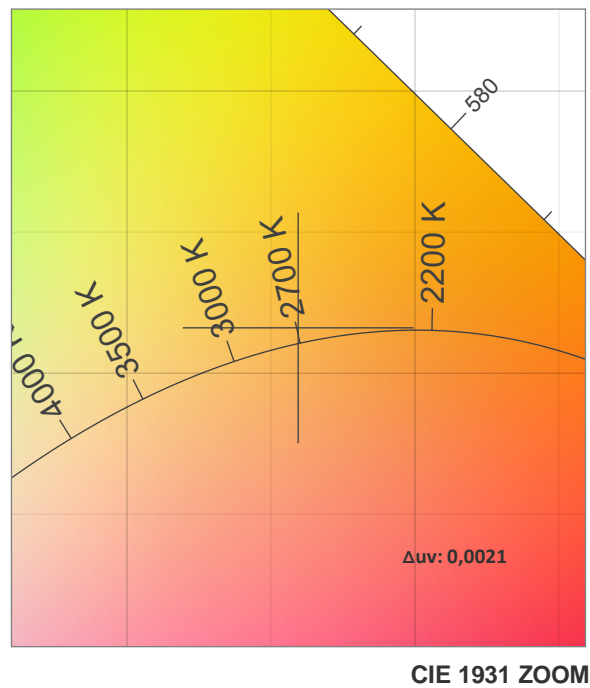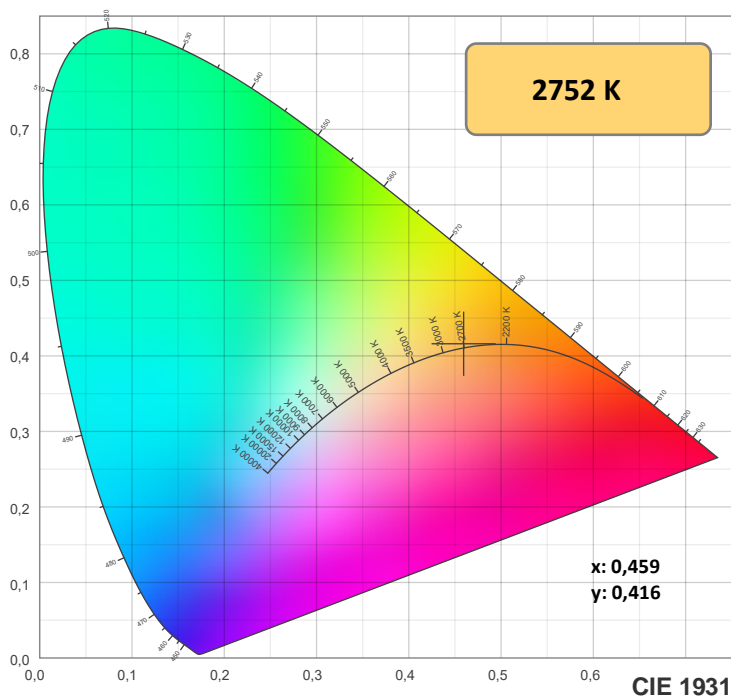

TM-30: 94,1

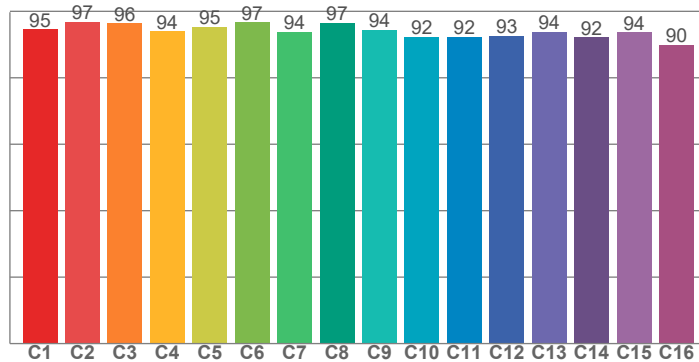

CRI: 96,9 (R1-R8)

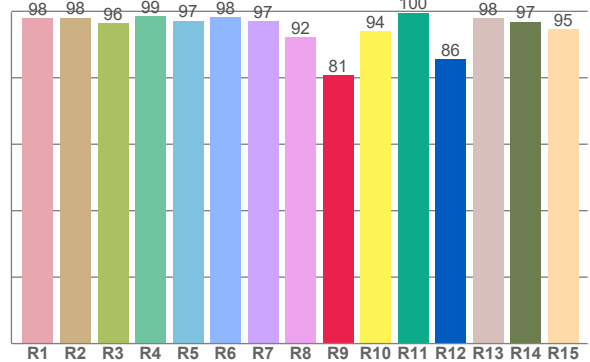

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,9	98,1	96,4	98,6	97,1	98,1	96,9	92,1	80,8	94,0	99,6	85,5	98,0	96,9	94,7

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,6	96,8	96,4	93,9	95,3	96,7	93,9	96,6	94,4	92,3	92,3	92,6	93,7	92,1	93,6	90,0

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2752 K	96,9	80,8	94,1	98,5	93,8	0,459	0,416	0,260	0,353	0,0021







Rf 94,1

Fidelity index Rf

Rg 98,5

Gamut index Rg

Hue Bin	R _i	Shifts (%)	
		Chroma	Hue
1	95	-2%	0%
2	97	-1%	0%
3	96	-1%	0%
4	94	-4%	-1%
5	95	-3%	1%
6	97	-1%	2%
7	94	-3%	3%
8	97	0%	2%
9	94	-1%	3%
10	92	1%	5%
11	92	2%	5%
12	93	4%	-1%
13	94	1%	-5%
14	92	2%	-6%
15	94	-2%	-1%
16	90	-1%	-8%

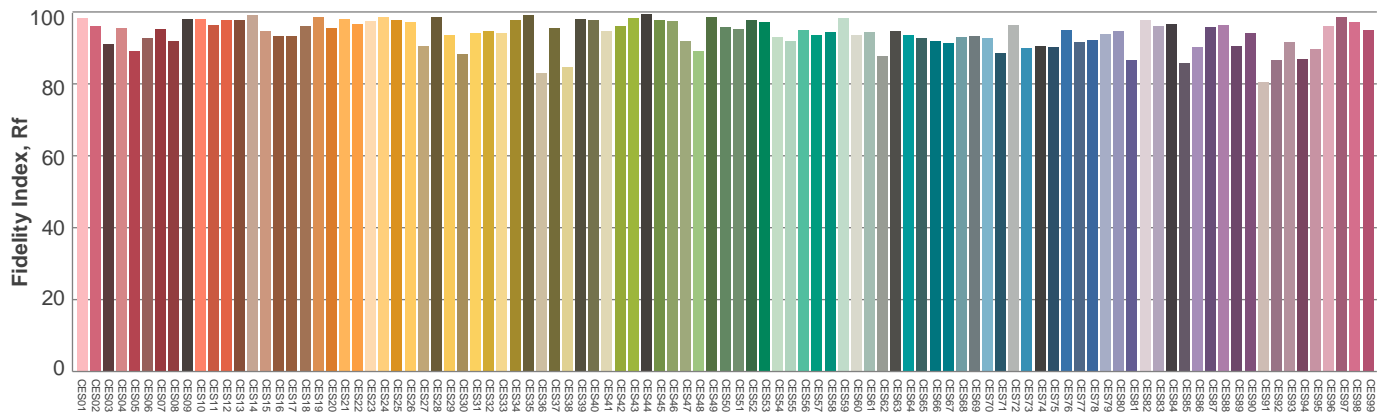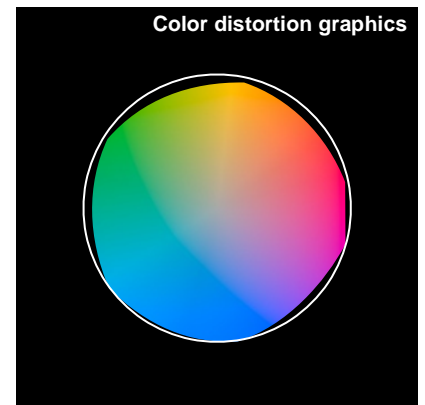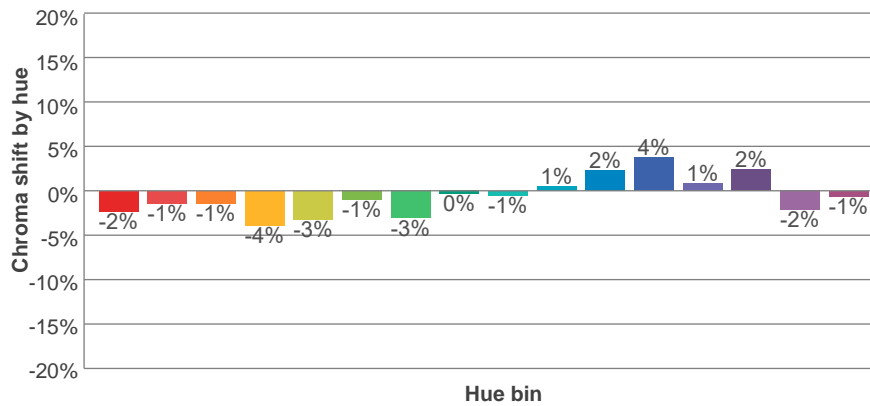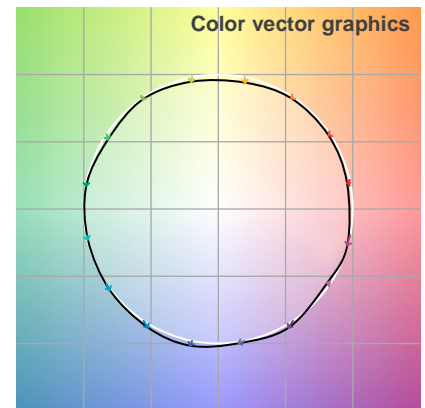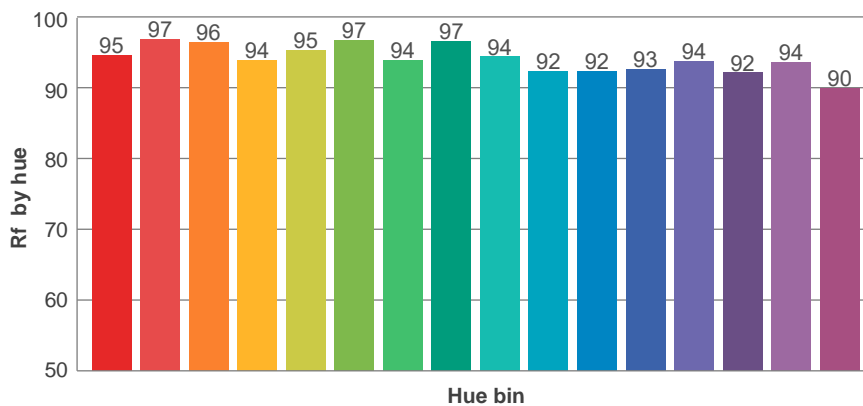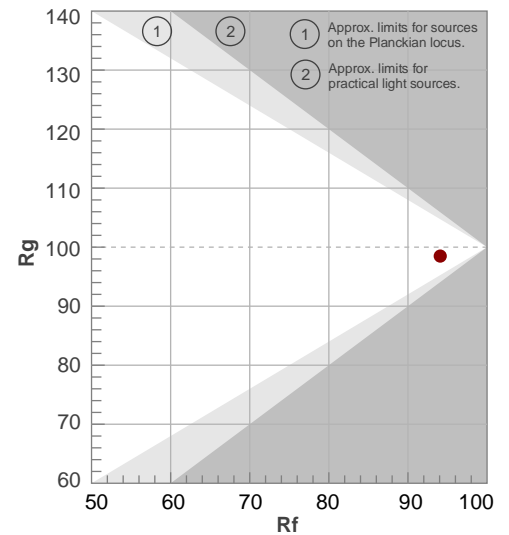

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19,6	20,8	19,8	21,1	21,3	19,6	20,8	19,8	21,1	21,3
	3H	21,0	22,3	21,5	22,6	22,8	21,0	22,3	21,5	22,6	22,8
	4H	21,7	22,9	22,1	23,1	23,4	21,7	22,9	22,1	23,1	23,4
	6H	22,2	23,2	22,5	23,5	23,9	22,2	23,2	22,5	23,5	23,9
	8H	22,3	23,3	22,6	23,6	24,0	22,3	23,3	22,6	23,6	24,0
	12H	22,3	23,3	22,7	23,6	24,1	22,3	23,3	22,7	23,6	24,1
4H	2H	20,2	21,4	20,6	21,7	21,9	20,2	21,4	20,6	21,7	21,9
	3H	22,0	23,0	22,3	23,3	23,8	22,0	23,0	22,3	23,3	23,8
	4H	22,6	23,5	23,1	24,0	24,5	22,6	23,5	23,1	24,0	24,5
	6H	23,2	24,0	23,7	24,4	24,8	23,2	24,0	23,7	24,4	24,8
	8H	23,3	24,1	23,8	24,5	24,9	23,3	24,1	23,8	24,5	24,9
	12H	23,4	24,1	23,9	24,5	25,0	23,4	24,1	23,9	24,5	25,0
8H	4H	22,9	23,7	23,4	24,1	24,5	22,9	23,7	23,4	24,1	24,5
	6H	23,6	24,2	24,1	24,7	25,2	23,6	24,2	24,1	24,7	25,2
	8H	23,8	24,4	24,4	24,9	25,5	23,8	24,4	24,4	24,9	25,5
	12H	24,0	24,4	24,6	24,9	25,6	24,0	24,4	24,6	24,9	25,6
12H	4H	22,9	23,6	23,4	24,0	24,5	22,9	23,6	23,4	24,0	24,5
	6H	23,7	24,2	24,2	24,7	25,4	23,7	24,2	24,2	24,7	25,4
	8H	23,9	24,4	24,5	24,9	25,5	23,9	24,4	24,5	24,9	25,5
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,2					0,2 / -0,2				
S = 2.0H		0,4 / -0,5					0,4 / -0,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 467 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	83
2	99	90	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	69
3	90	79	71	65	87	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	61	55	80	69	61	54	66	59	53	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	59	52	46	57	51	46	56	50	45	43
6	70	56	47	41	68	55	47	41	54	46	40	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	51	39	31	26	38	31	26	37	31	26	36	30	26	24

Quantidade de luminárias

Luminaire budgetary diagram

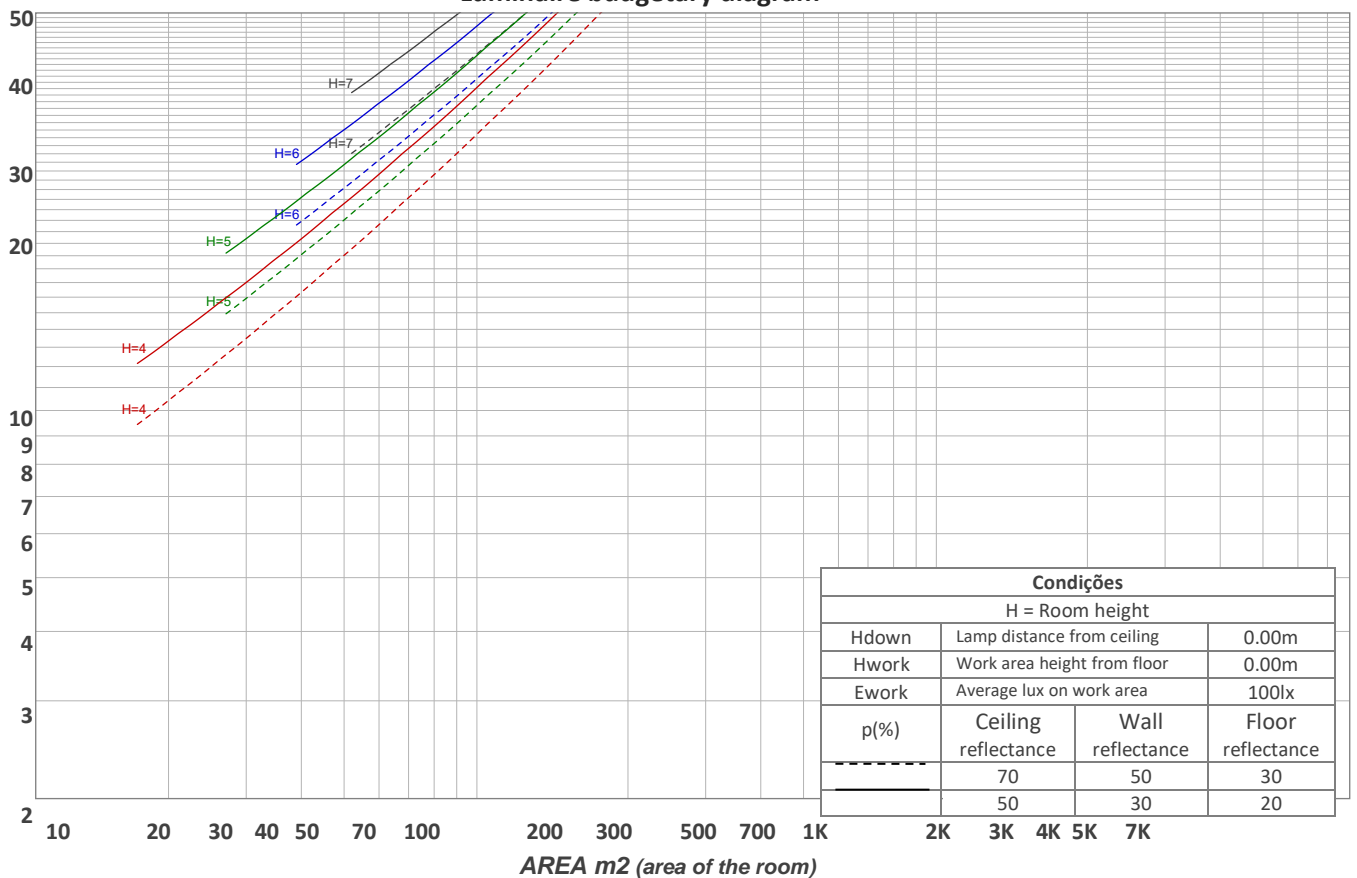

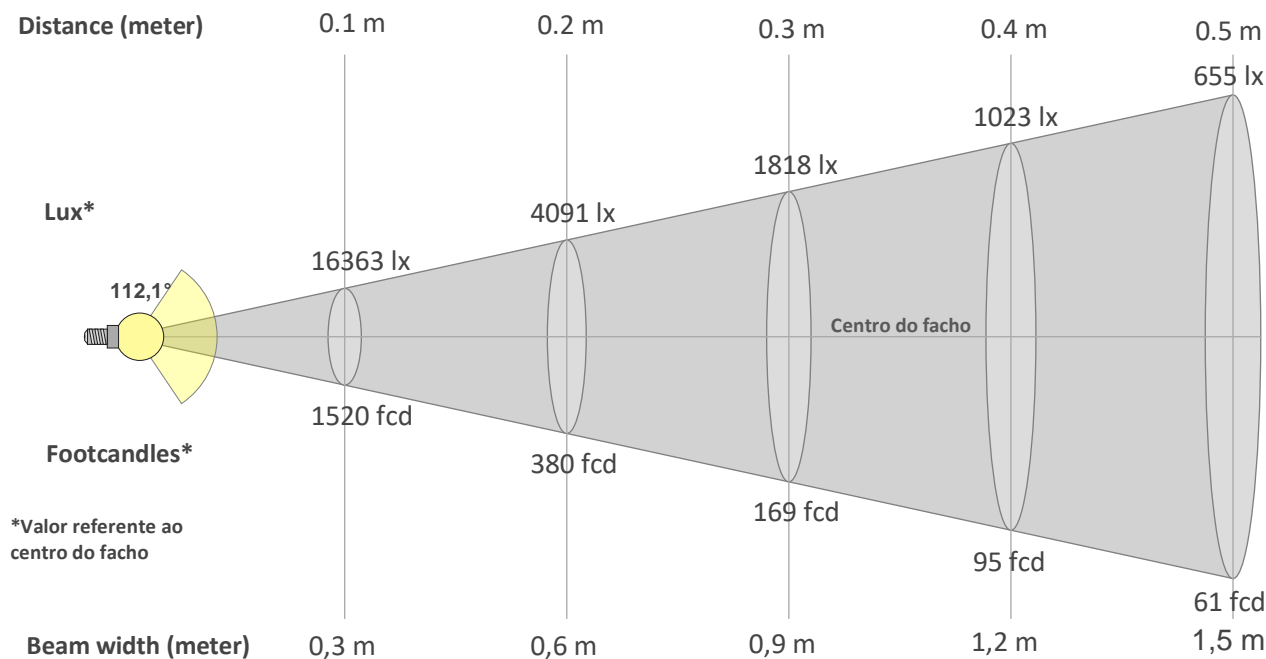

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
164lx	41lx	18lx	10lx	7lx	5lx	3lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx
15,2fcd	3,8fcd	1,7fcd	1fcd	0,6fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
164	163	161	157	152	145	139	129	119	108	97	84	72	58	45	31	18	7	1	0
100%	100%	98%	96%	93%	89%	85%	79%	73%	66%	59%	52%	44%	36%	27%	19%	11%	4%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
164	163	161	157	152	145	139	129	119	108	97	84	72	58	45	31	18	7	1	0
100%	100%	98%	96%	93%	89%	85%	79%	73%	66%	59%	52%	44%	36%	27%	19%	11%	4%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
164	163	161	157	152	145	139	129	119	108	97	84	72	58	45	31	18	7	1	0
100%	100%	98%	96%	93%	89%	85%	79%	73%	66%	59%	52%	44%	36%	27%	19%	11%	4%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
164	163	161	157	152	145	139	129	119	108	97	84	72	58	45	31	18	7	1	0
100%	100%	98%	96%	93%	89%	85%	79%	73%	66%	59%	52%	44%	36%	27%	19%	11%	4%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,1°	161,2°	172,9°	78,6%	53,6%

iso-candela diagram

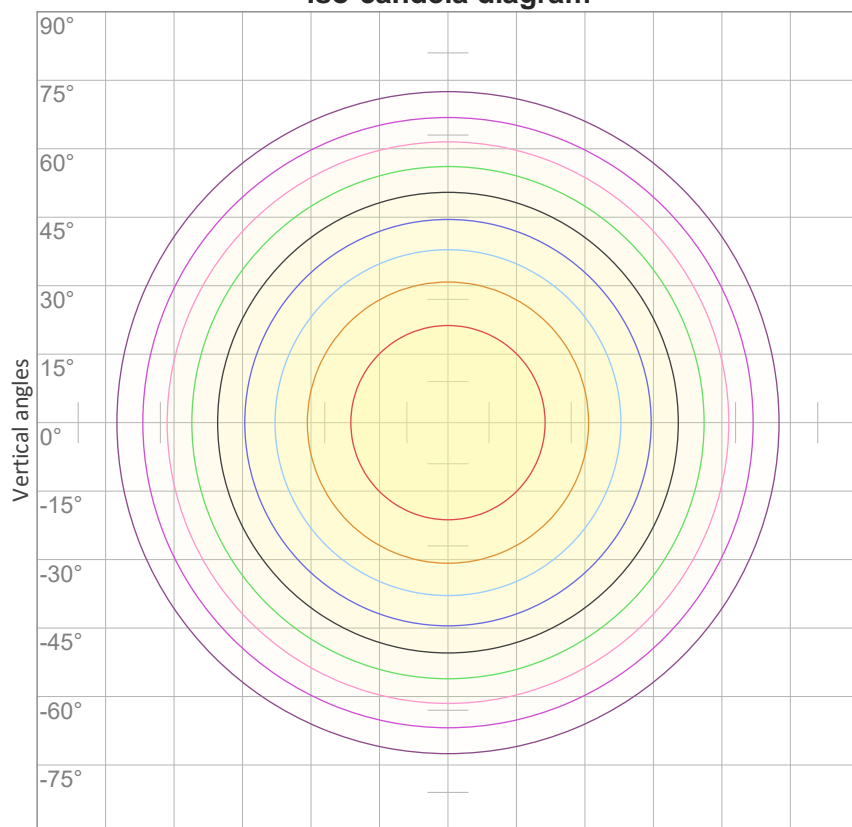

Horizontal angles


10%	16 cd
20%	33 cd
30%	49 cd
40%	65 cd
50%	82 cd
60%	98 cd
70%	115 cd
80%	131 cd
90%	147 cd

Conditions:

Number of c-planes: 16

Candela at center: 164 cd

iso-lux diagram

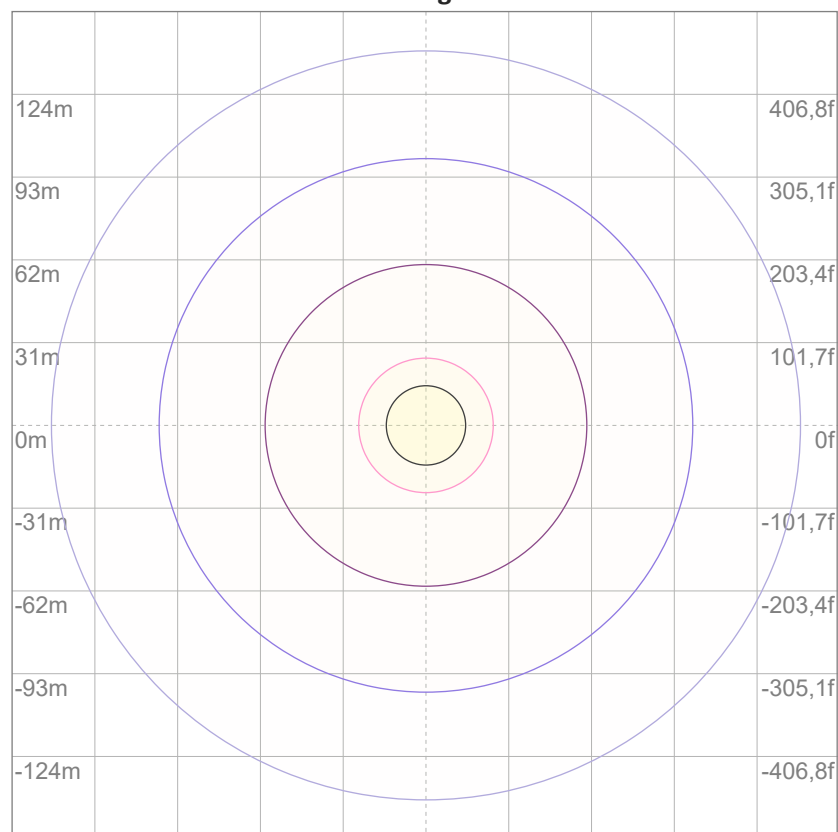

Mounting height: 10 meters

3%	49,1m lx
5%	81,8m lx
10%	0,164 lx
30%	0,491 lx
50%	0,818 lx

Conditions:

Number of c-planes: 16

Lux at center: 1,64 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência



Voltagem: 12,0 V

Corrente: 0,958 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a