

## W20 SLED9083 BRANCA FITA 14,4WM 2700K 80 - 1m



Luminária linear roda teto na parede com iluminação difusa up light. Corpo em alumínio extrudado com acabamento na cor branca. Difusor em acrílico extrudado leitoso. Indicado para residência, recepção, escritório etc. OBS.: Para o ensaio fotométrico o .ies tem que ser posicionado a uma distancia minima de 25mm do teto.

Fluxo luminoso – 876 lm/m

Potência – 14,4 W/m

Intensidade pico – 382cd

CCT – 2731K



IRC – 82,3

Coordenada CIE 1931 – x- 0,460 y- 0,414

A x L - 26x42

Peso - 0,3kg/m

IP - 20 - Uso Interno


IK - 00 – Não aplicável

Alimentação - 12vdc

Data do ensaio

26/02/2021 13:19:32

**89,3°**

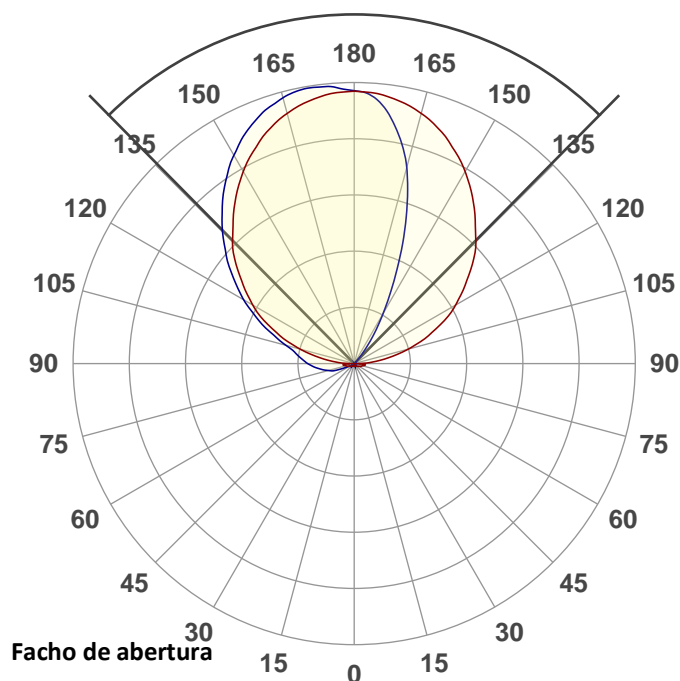


**Rf 85,7**



Fidelity index Rf

**Rg 94,6**


Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	79	-12%	0%
2	81	-8%	7%
3	80	-4%	10%
4	91	0%	5%
5	95	1%	3%
6	95	1%	-1%
7	88	-4%	-6%
8	93	-4%	0%
9	89	-6%	3%
10	86	-4%	9%
11	85	0%	11%
12	86	6%	1%
13	87	4%	-9%
14	80	3%	-16%
15	83	-4%	-9%
16	77	-10%	-15%

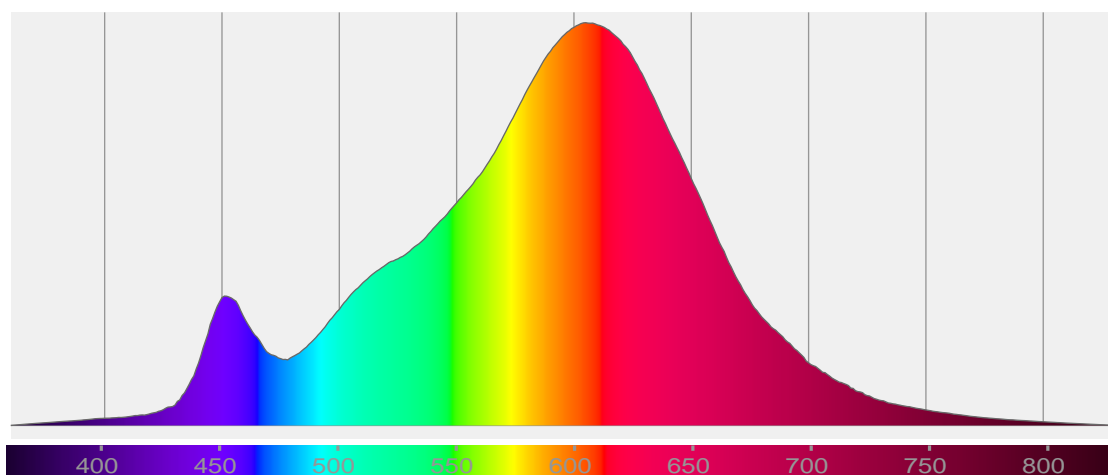


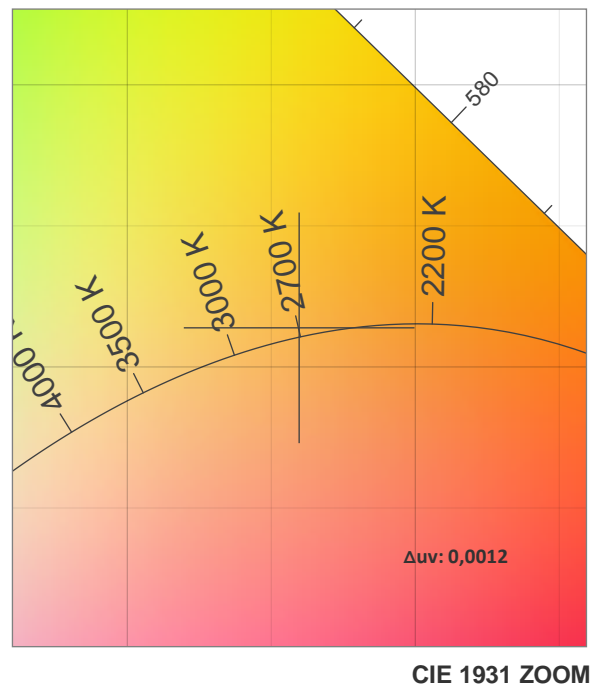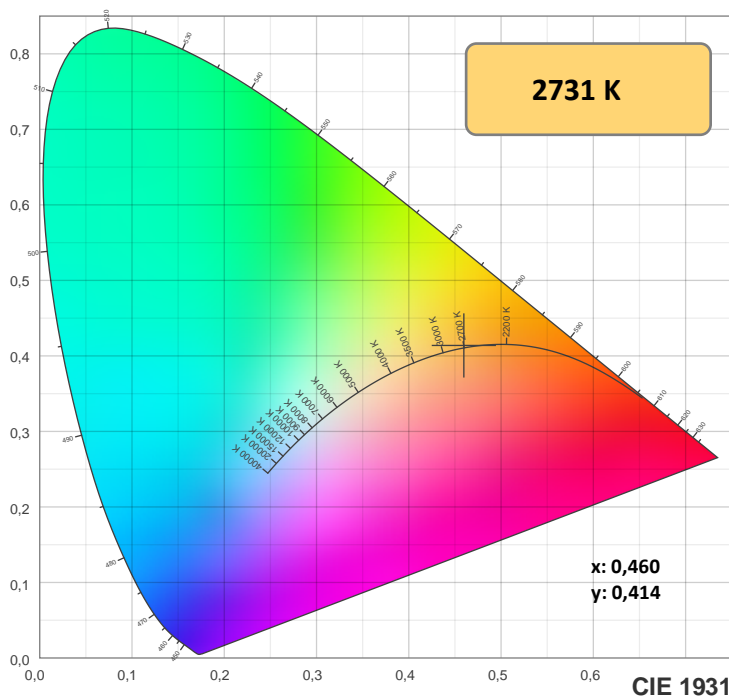

TM-30: 85,7

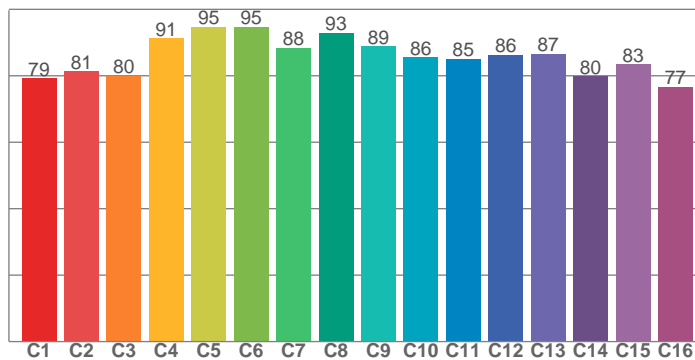

CRI: 82,3 (R1-R8)

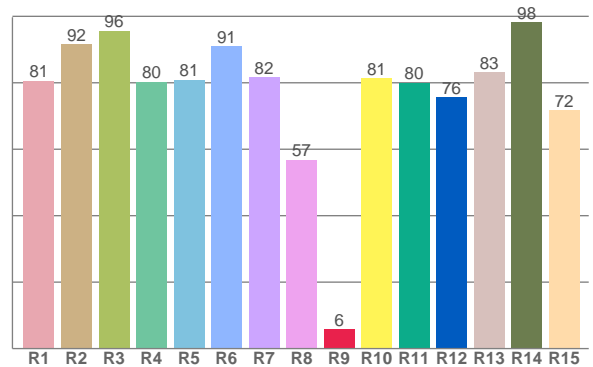

CRi R1-R8 / CRi R9-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,6	91,5	95,6	80,3	80,9	91,0	81,6	56,9	5,7	81,4	80,0	75,7	83,2	98,2	71,7

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,2	81,3	80,0	91,2	94,7	94,8	88,3	92,9	88,8	85,6	85,0	86,4	86,5	79,8	83,5	76,6

## Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2731 K	82,3	5,7	85,7	94,6	82,4	0,460	0,414	0,261	0,352	0,0012







**Rf 85,7**

Fidelity index Rf

**Rg 94,6**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	79	-12%	0%
2	81	-8%	7%
3	80	-4%	10%
4	91	0%	5%
5	95	1%	3%
6	95	1%	-1%
7	88	-4%	-6%
8	93	-4%	0%
9	89	-6%	3%
10	86	-4%	9%
11	85	0%	11%
12	86	6%	1%
13	87	4%	-9%
14	80	3%	-16%
15	83	-4%	-9%
16	77	-10%	-15%

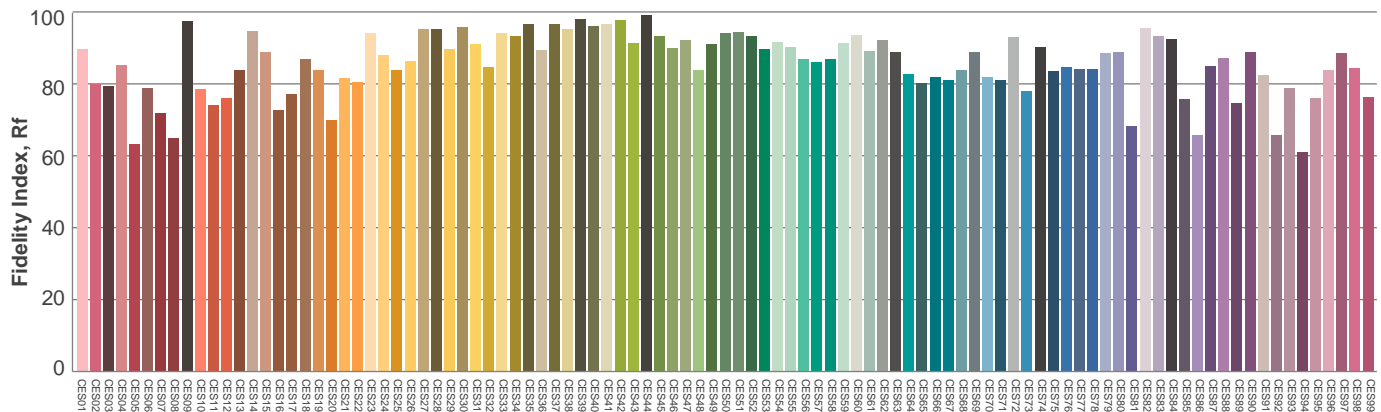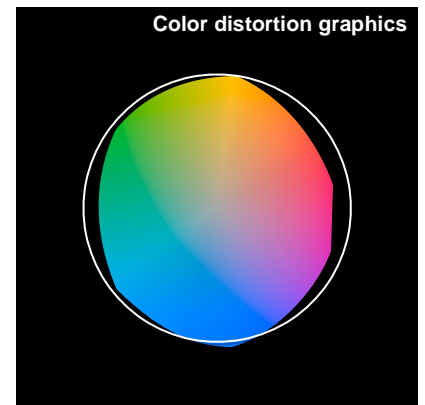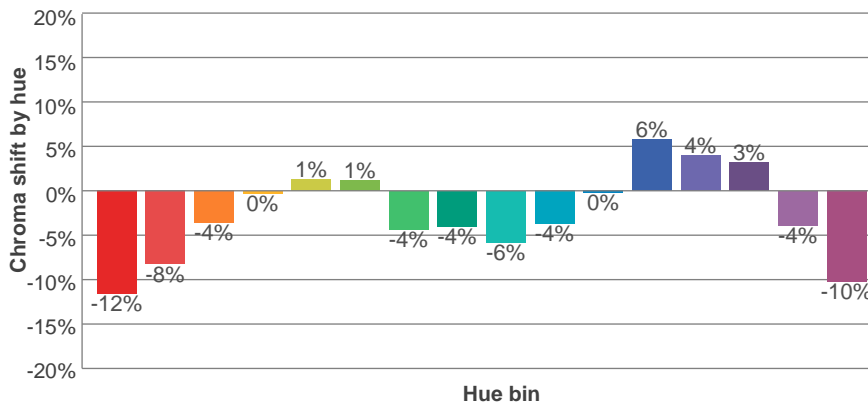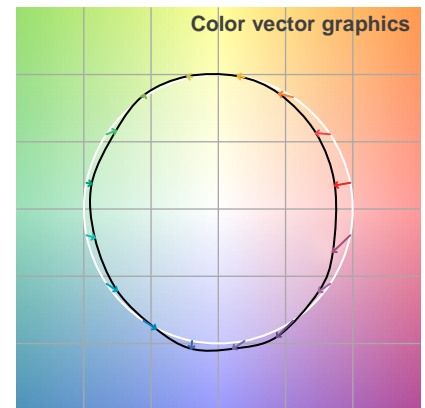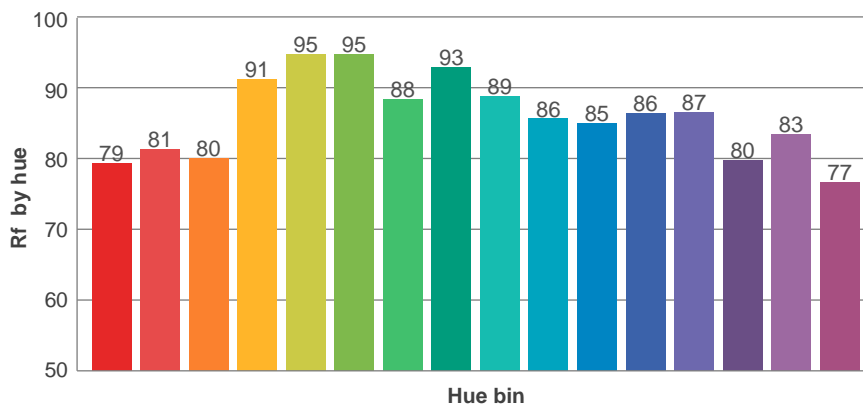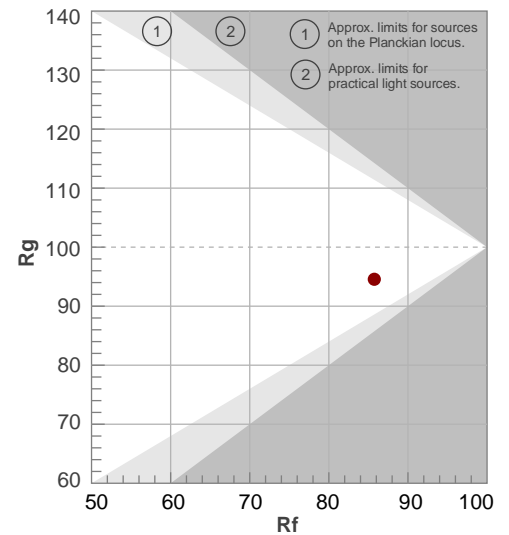

## Glare Evaluation According to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
Standard table	n/a					n/a				
Correction summand	n/a					n/a				
Corrected glare indices referring to 876 lm total luminous flux										


UGR data could not be calculated due to missing/wrong symmetry. Goto Edit->Photometric->Corrections and select Correct asymmetry.


**Coeficiente de utilização**

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	97	97	97	97	84	84	84	84	59	59	59	37	37	37	16	16	16	6
1	87	82	78	74	75	71	68	65	50	48	46	30	29	28	12	12	11	3
2	79	71	65	60	67	61	56	52	43	40	37	26	24	22	10	9	9	2
3	71	62	55	49	61	54	48	43	38	34	31	23	20	19	9	8	7	1
4	65	55	47	41	56	47	41	36	33	29	26	20	18	16	8	7	6	1
5	59	48	41	35	51	42	35	30	29	25	22	18	15	13	7	6	5	1
6	55	43	35	30	47	37	31	26	26	22	19	16	13	11	6	5	4	1
7	50	39	31	26	43	33	27	23	24	19	16	14	12	10	6	4	4	0
8	46	35	27	22	40	30	24	20	21	17	14	13	10	9	5	4	3	0
9	43	31	24	20	37	27	21	17	19	15	12	12	9	8	5	4	3	0
10	40	29	22	17	34	25	19	15	18	14	11	11	8	7	4	3	2	0

**Quantidade de luminárias**

**Luminaire budgetary diagram**

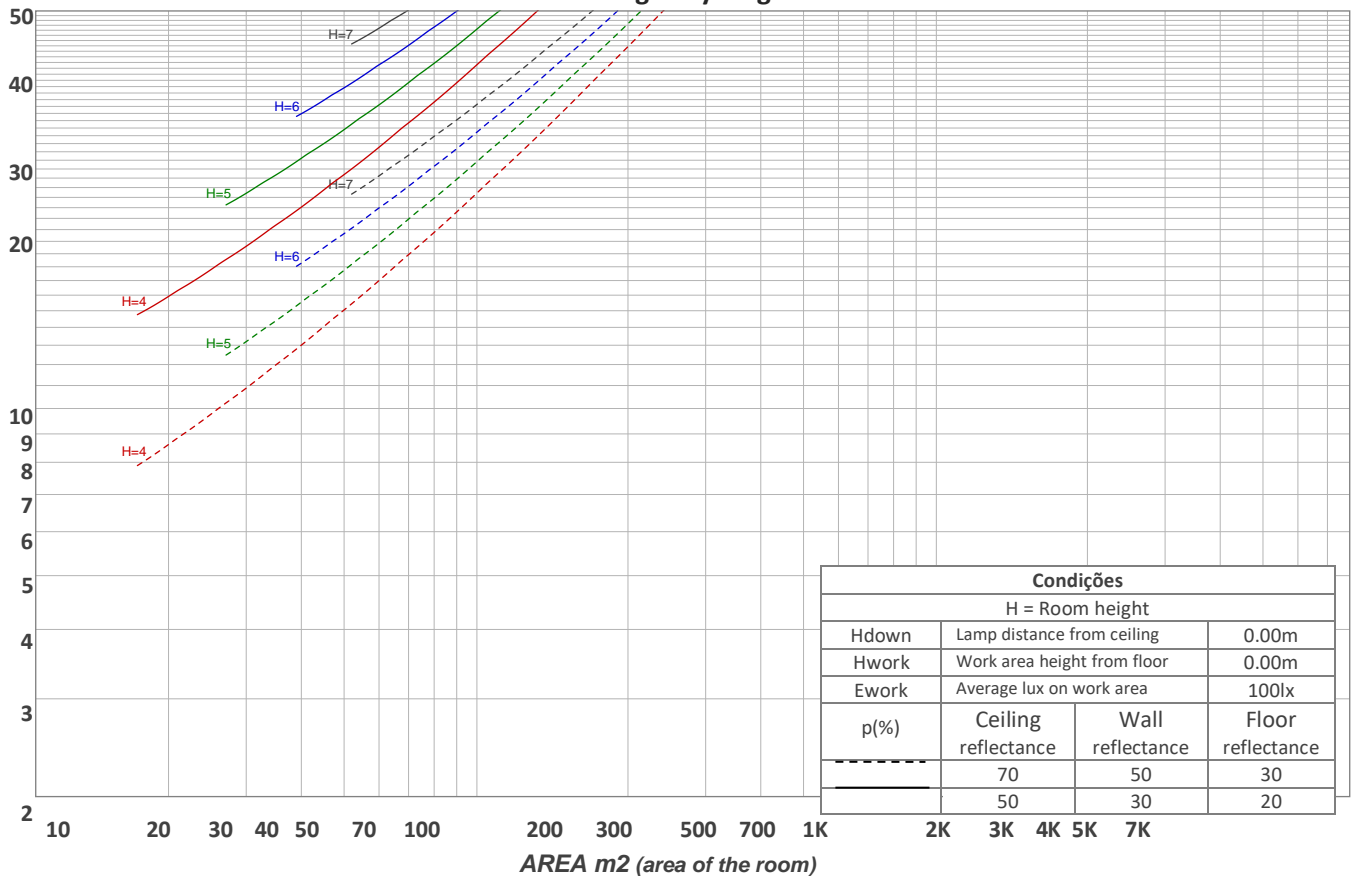

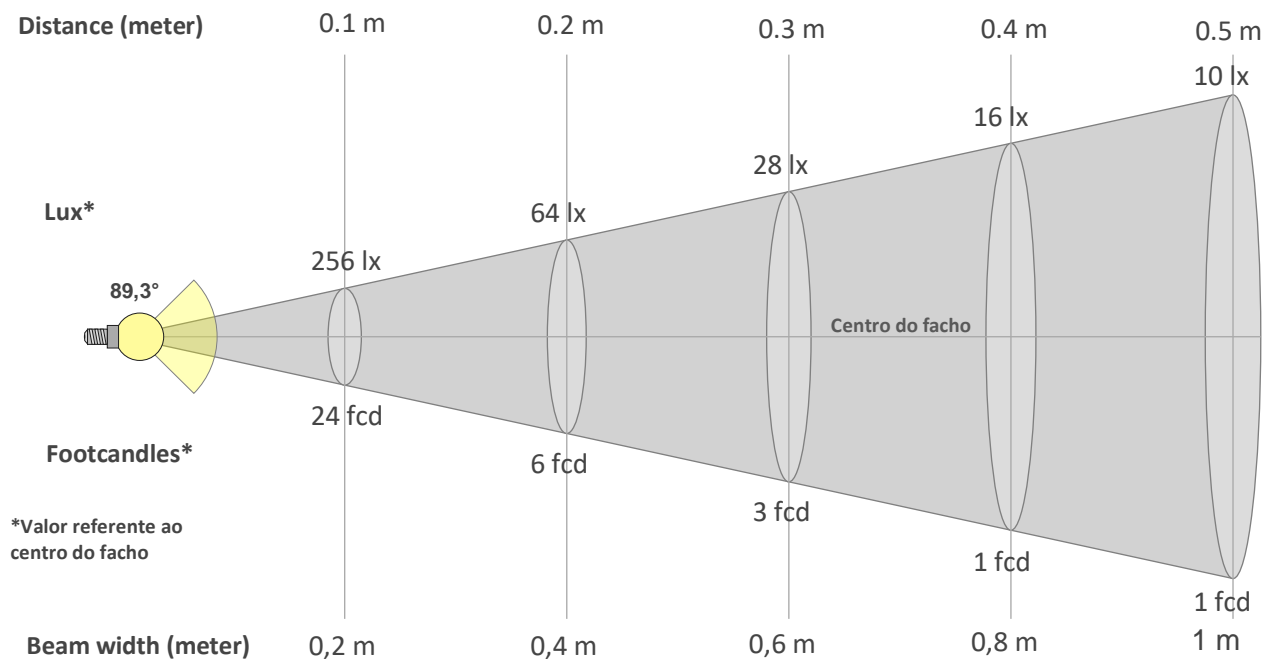

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
3lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
0,2fcd	0,1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
3	3	3	3	3	3	4	4	4	5	6	7	8	9	10	12	14	15	6	26
100%	102%	98%	109%	108%	123%	140%	148%	170%	199%	225%	257%	294%	357%	407%	456%	550%	566%	232%	1003%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
3	3	2	3	2	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2
100%	106%	92%	107%	84%	104%	100%	94%	89%	85%	88%	89%	84%	73%	69%	65%	74%	65%	66%	67%

### Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
3	3	3	3	3	3	4	4	4	5	6	7	8	9	10	12	14	15	6	26
100%	102%	98%	109%	108%	123%	140%	148%	170%	199%	225%	257%	294%	357%	407%	456%	550%	566%	232%	1003%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
3	3	2	3	2	2	2	2	2	1	2	2	3	12	27	37	45	55	64	72
100%	114%	82%	105%	83%	66%	75%	73%	71%	53%	63%	89%	122%	451%	1070%	1426%	1772%	2134%	2483%	2802%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
89,3°	145,8°	176,7°	72,7%	52,8%

**iso-candela diagram**

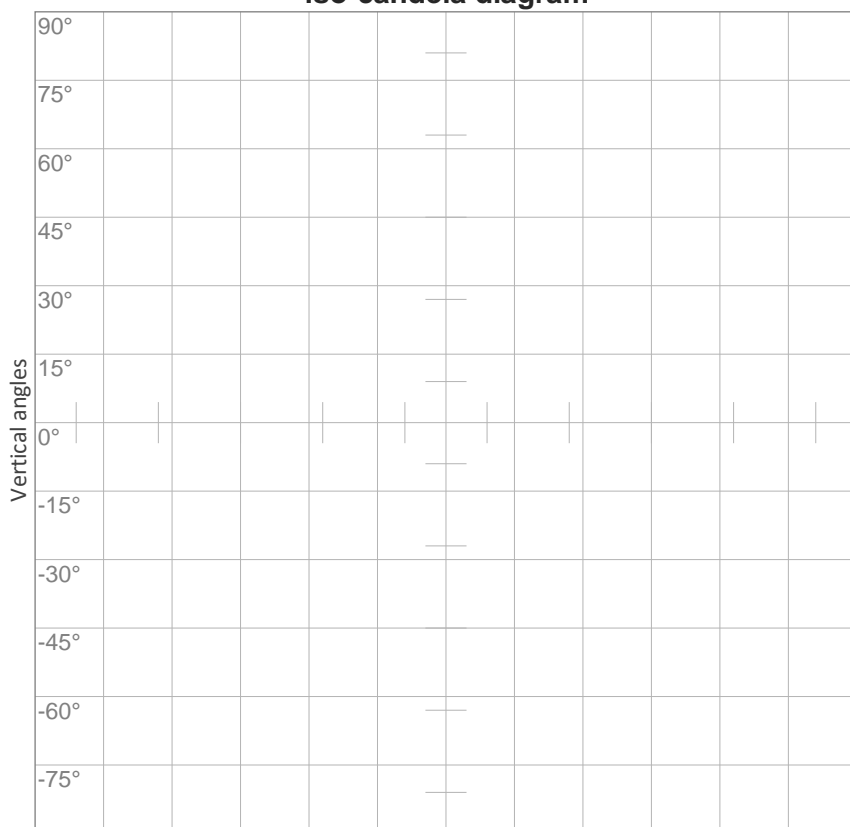

Horizontal angles


10%	0 cd
20%	1 cd
30%	1 cd
40%	1 cd
50%	1 cd
60%	2 cd
70%	2 cd
80%	2 cd
90%	2 cd

Conditions:

Number of c-planes: 16

Candela at center: 3 cd

**iso-lux diagram**

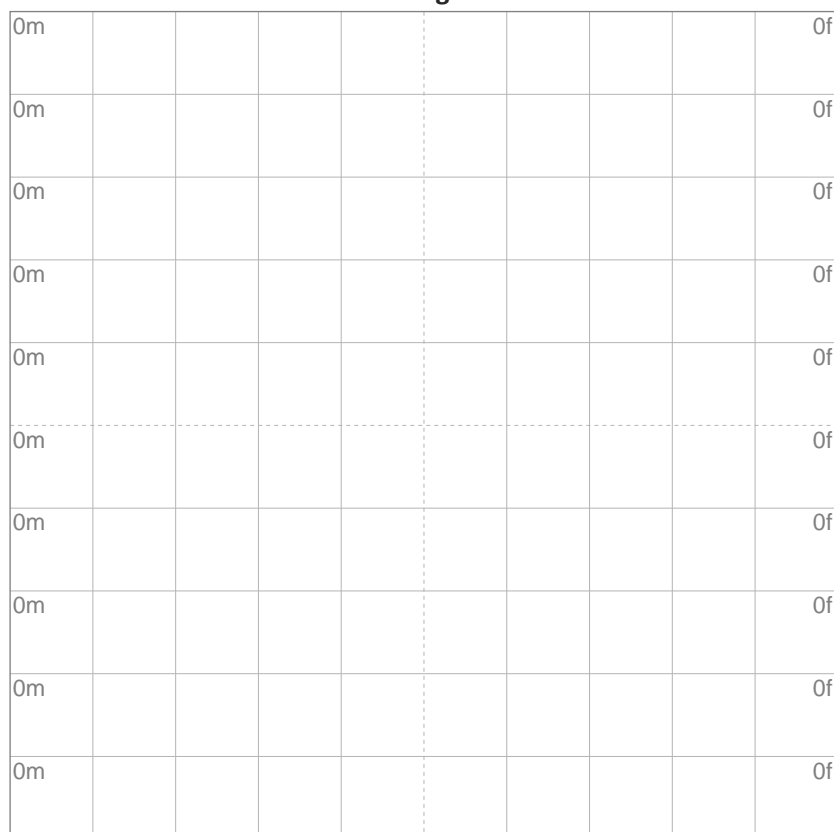

Mounting height: 10 meters

3%	769u lx
5%	1,28m lx
10%	2,56m lx
30%	7,69m lx
50%	12,8m lx

Conditions:

Number of c-planes: 16

Lux at center: 25,6m lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

## Potência

[illegible]

**Voltagem: 12,0 V**

**Corrente: 1,20 A**

**Frequência: 0 Hz**

**FP: 1,0**

## THD

**THD corrente: n/a**

**THD tensão: n/a**