

## SLED9122SF LUMINARIA LINEAR DE SOBREPOR 2x2 14,4W/m 3500K 80 1M



Fluxo luminoso – 855 lm/m

Potência – 14,3 W/m

Intensidade pico – 302cd

CCT – 3432K




IRC – 84,4

Coordenada CIE 1931 – x- 0,409 y- 0,391

Data do ensaio

28/08/2024 16:32:06

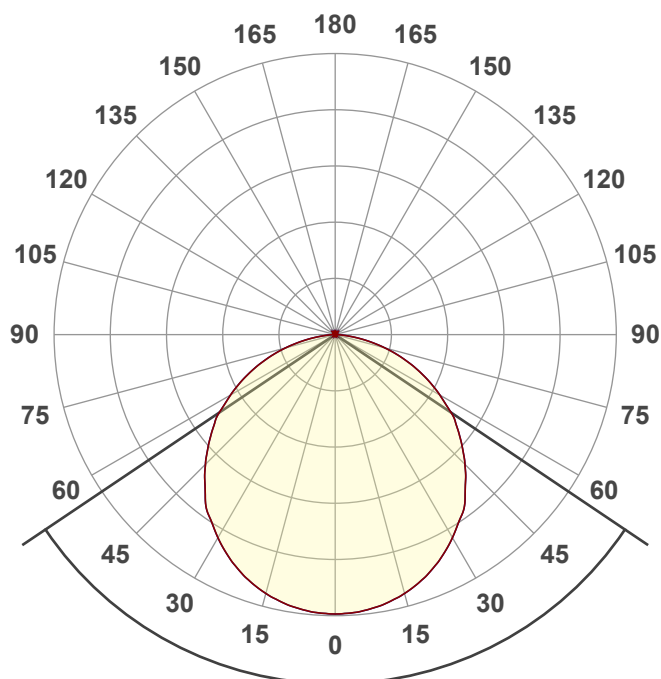

Facho de abertura

**112,1°**


**Rf 85,1**



Fidelity index Rf

**Rg 95,2**


Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	80	-11%	1%
2	83	-7%	6%
3	81	-3%	9%
4	90	-1%	4%
5	92	-2%	2%
6	95	0%	-2%
7	90	-6%	-2%
8	92	-4%	1%
9	87	-5%	7%
10	80	-4%	13%
11	79	2%	13%
12	87	8%	2%
13	89	4%	-7%
14	81	5%	-15%
15	80	-3%	-14%
16	78	-7%	-11%

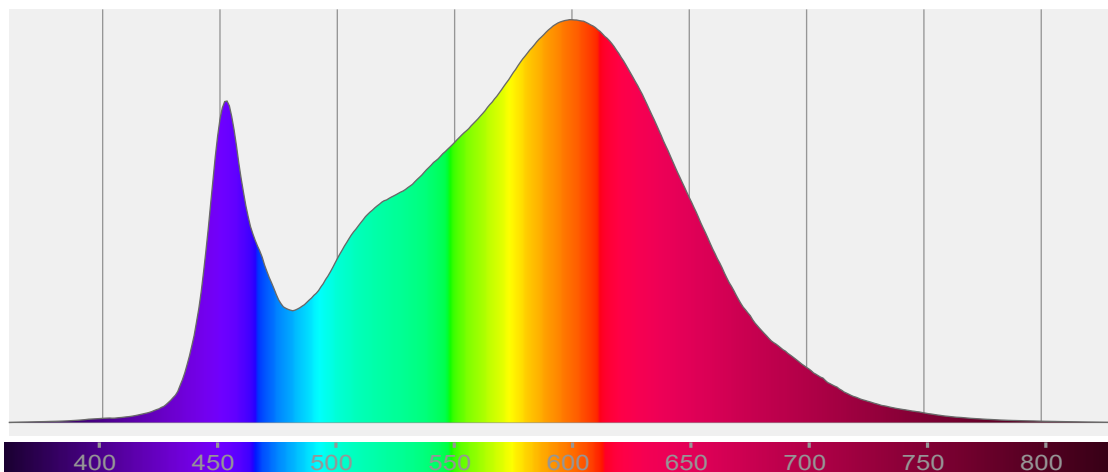


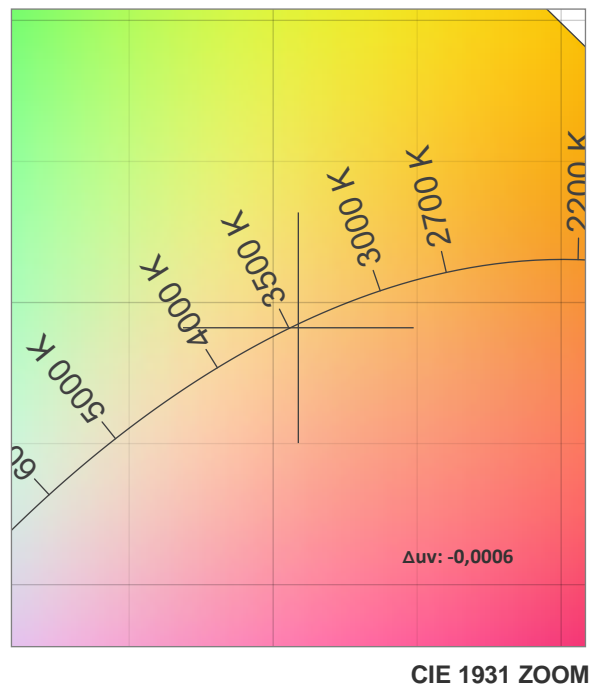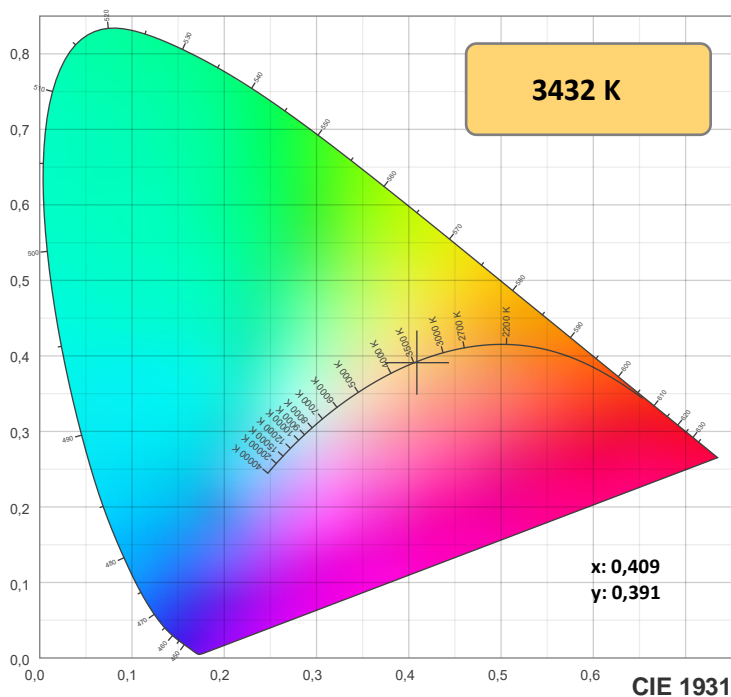

TM-30: 85,1

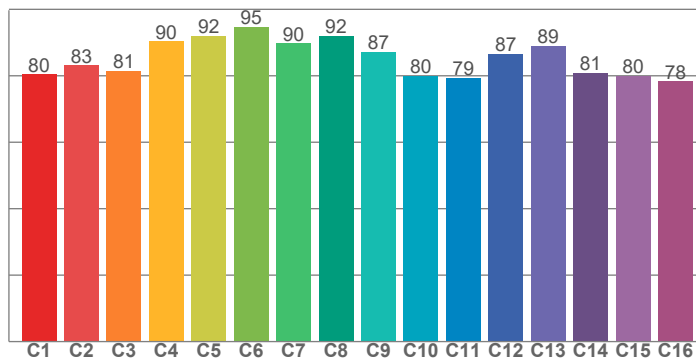

CRI: 84,4 (R1-R8)

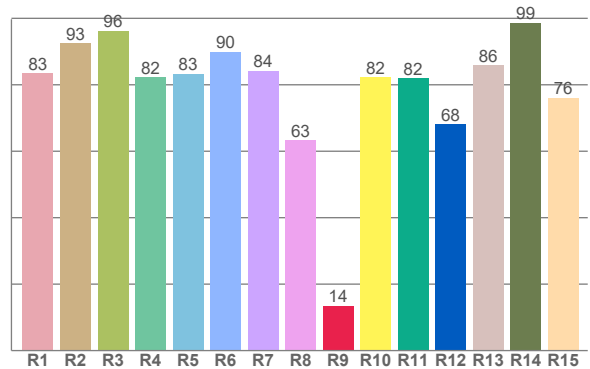

CRiRa R1-R8 / CRiRe R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83,4	92,6	96,3	82,4	83,4	90,0	84,2	63,2	13,5	82,3	81,9	68,1	86,0	98,7	76,1

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80,4	83,2	81,5	90,4	92,0	94,7	89,8	92,1	87,3	80,0	79,4	86,5	88,9	80,8	79,9	78,3

## Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3432 K	84,4	13,5	85,1	95,2	83,6	0,409	0,391	0,238	0,341	-0,0006







**Rf 85,1**

Fidelity index Rf

**Rg 95,2**

Gamut index Rg

Hue Bin	R <sub>i</sub>	Shifts (%)	
		Chroma	Hue
1	80	-11%	1%
2	83	-7%	6%
3	81	-3%	9%
4	90	-1%	4%
5	92	-2%	2%
6	95	0%	-2%
7	90	-6%	-2%
8	92	-4%	1%
9	87	-5%	7%
10	80	-4%	13%
11	79	2%	13%
12	87	8%	2%
13	89	4%	-7%
14	81	5%	-15%
15	80	-3%	-14%
16	78	-7%	-11%

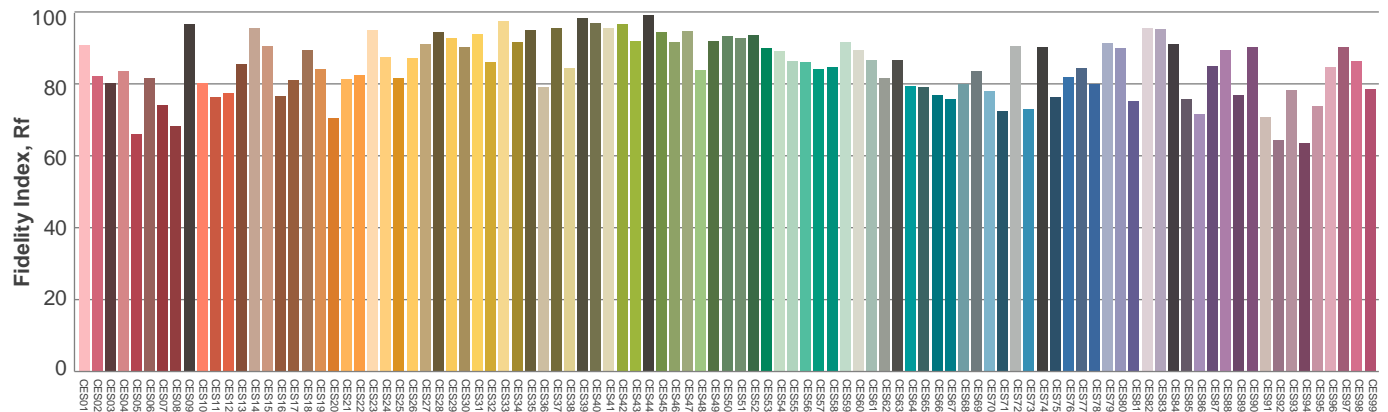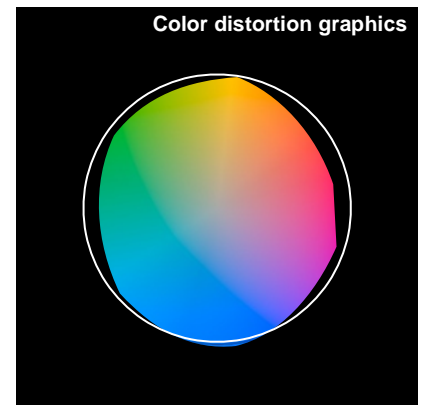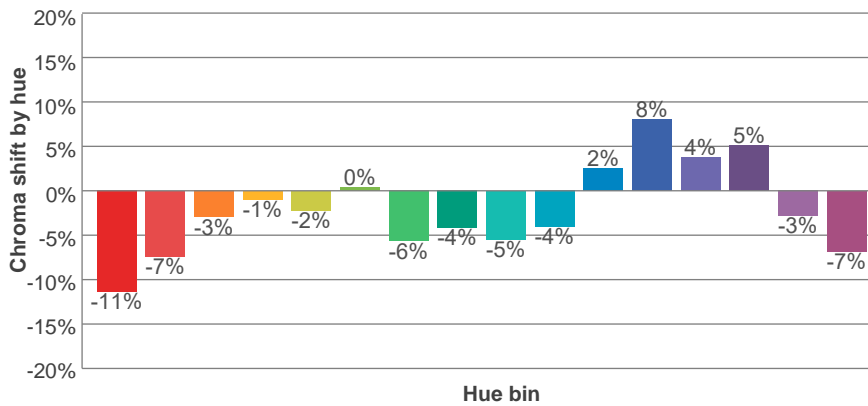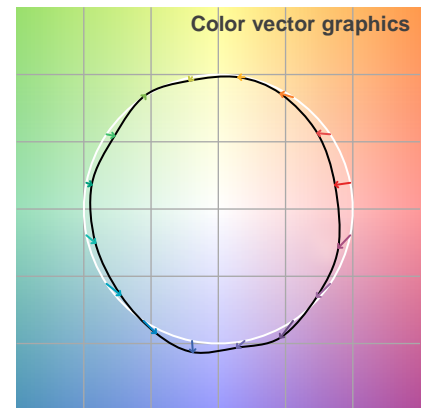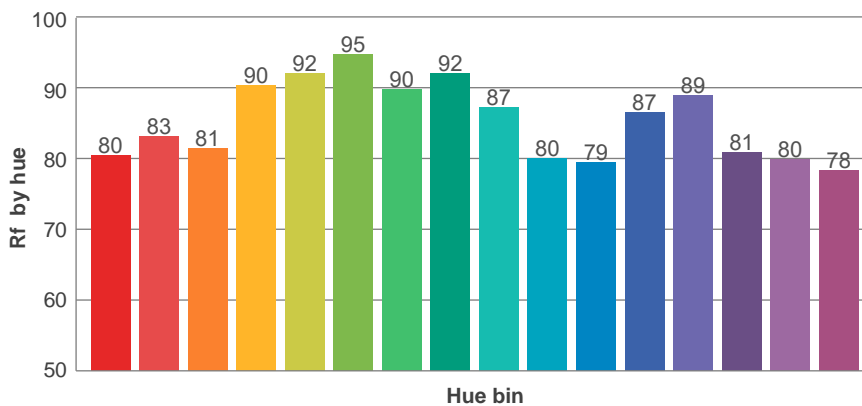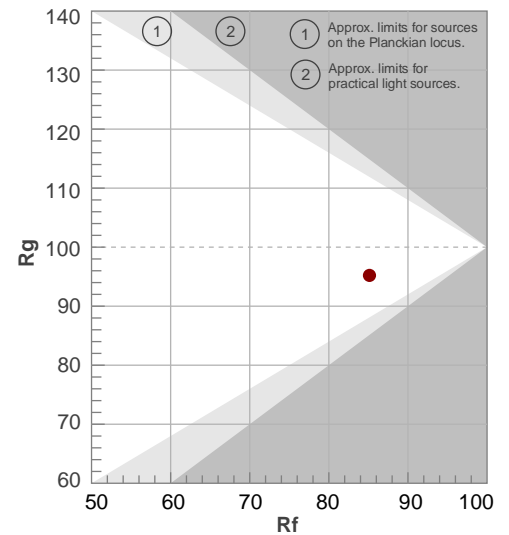

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,7	22,9	21,9	23,2	23,4	21,7	22,9	21,9	23,2	23,4
	3H	23,1	24,4	23,5	24,7	24,9	23,1	24,4	23,5	24,7	24,9
	4H	23,7	24,9	24,1	25,2	25,5	23,7	24,9	24,1	25,2	25,5
	6H	24,2	25,2	24,5	25,5	25,9	24,2	25,2	24,5	25,5	25,9
	8H	24,3	25,3	24,6	25,6	26,0	24,3	25,3	24,6	25,6	26,0
	12H	24,3	25,3	24,7	25,6	26,1	24,3	25,3	24,7	25,6	26,1
4H	2H	22,3	23,5	22,7	23,7	24,0	22,3	23,5	22,7	23,7	24,0
	3H	24,0	25,0	24,4	25,4	25,8	24,0	25,0	24,4	25,4	25,8
	4H	24,7	25,6	25,1	26,0	26,6	24,7	25,6	25,1	26,0	26,6
	6H	25,2	26,1	25,7	26,4	26,8	25,2	26,1	25,7	26,4	26,8
	8H	25,3	26,1	25,8	26,5	26,9	25,3	26,1	25,8	26,5	26,9
	12H	25,4	26,0	25,9	26,5	27,0	25,4	26,0	25,9	26,5	27,0
8H	4H	25,0	25,7	25,5	26,1	26,5	25,0	25,7	25,5	26,1	26,5
	6H	25,6	26,2	26,1	26,7	27,2	25,6	26,2	26,1	26,7	27,2
	8H	25,8	26,3	26,3	26,9	27,5	25,8	26,3	26,3	26,9	27,5
	12H	25,9	26,4	26,5	26,9	27,5	25,9	26,4	26,5	26,9	27,5
12H	4H	25,0	25,6	25,5	26,0	26,5	25,0	25,6	25,5	26,0	26,5
	6H	25,7	26,2	26,2	26,7	27,4	25,7	26,2	26,2	26,7	27,4
	8H	25,9	26,3	26,5	26,8	27,5	25,9	26,3	26,5	26,8	27,5
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,3					0,2 / -0,3				
S = 2.0H		0,5 / -0,5					0,5 / -0,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 855 lm total luminous flux											


**Coeficiente de utilização**

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	83
2	99	91	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	69
3	90	79	71	65	88	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	62	55	80	69	61	54	66	59	54	64	58	53	62	56	52	50
5	76	63	54	47	74	62	53	47	60	52	46	57	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	50	44	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

**Quantidade de luminárias**

**Luminaire budgetary diagram**

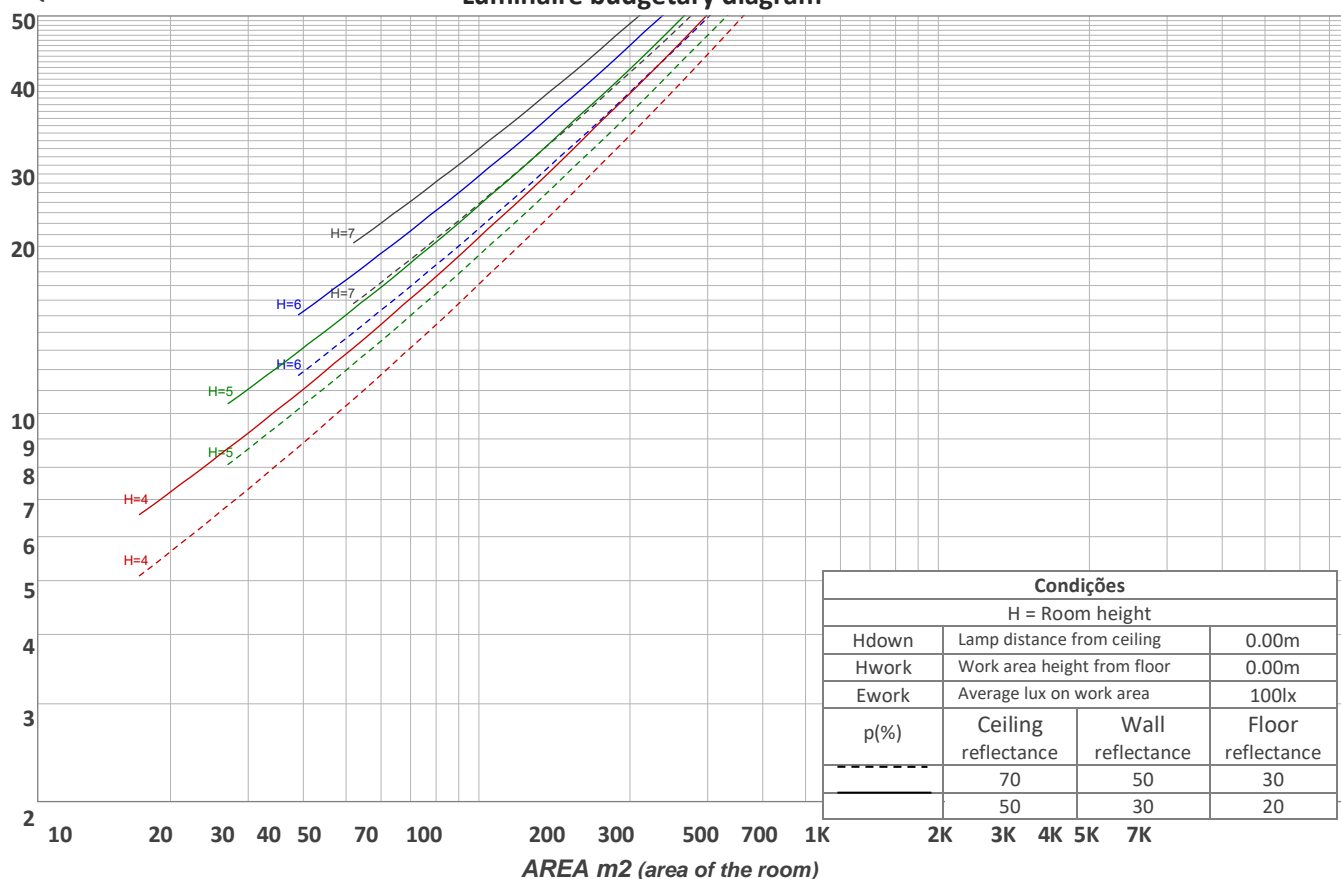

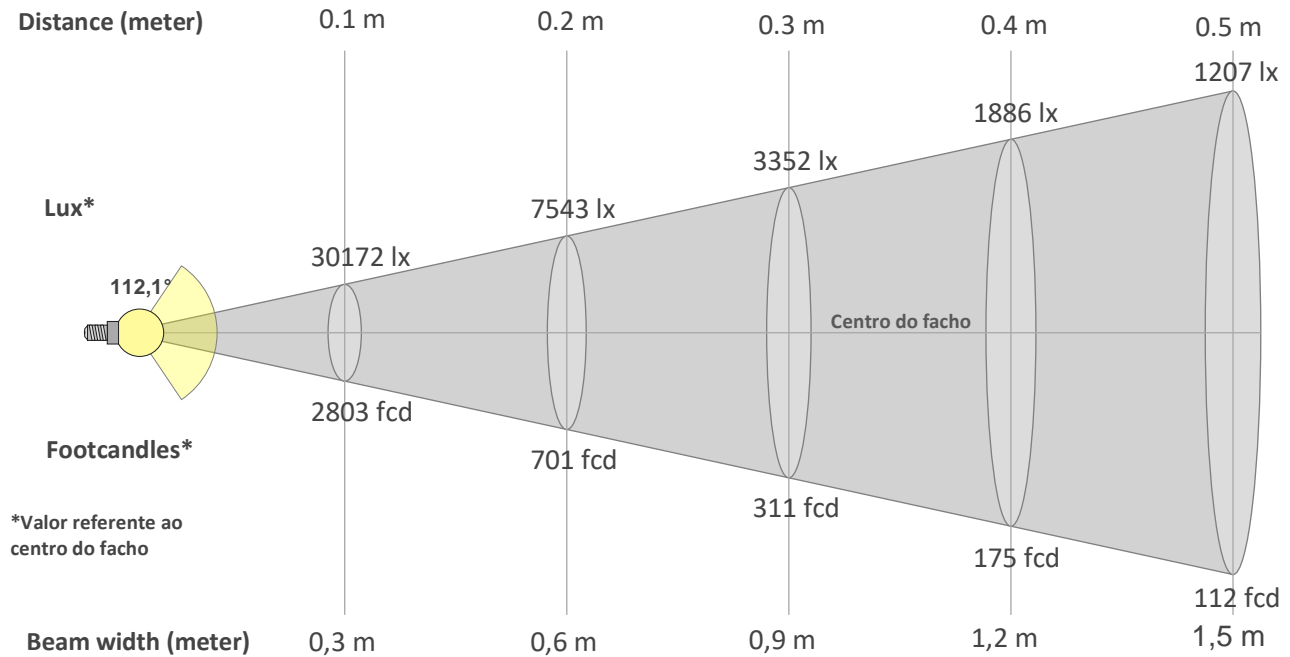

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
302lx	75lx	34lx	19lx	12lx	8lx	6lx	5lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
28fcd	7fcd	3,1fcd	1,8fcd	1,1fcd	0,8fcd	0,6fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	280	268	253	238	218	198	177	156	130	106	81	56	31	10	1	1
100%	100%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	43%	35%	27%	18%	10%	3%	0%	0%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	280	268	253	238	218	198	177	156	130	106	81	56	31	10	1	1
100%	100%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	43%	35%	27%	18%	10%	3%	0%	0%

### Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	280	268	253	238	218	198	177	156	130	106	81	56	31	10	1	1
100%	100%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	43%	35%	27%	18%	10%	3%	0%	0%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	280	268	253	238	218	198	177	156	130	106	81	56	31	10	1	1
100%	100%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	43%	35%	27%	18%	10%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,1°	160,4°	172,1°	78,8%	53,7%

**iso-candela diagram**

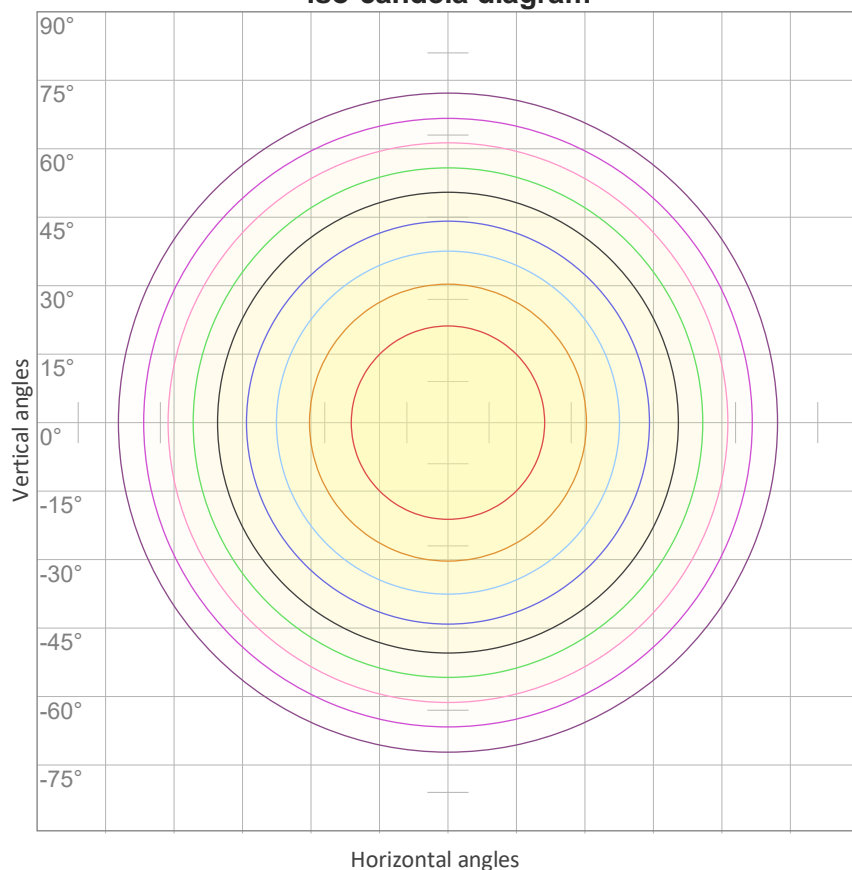


10%	30 cd
20%	60 cd
30%	91 cd
40%	121 cd
50%	151 cd
60%	181 cd
70%	211 cd
80%	241 cd
90%	272 cd

Conditions:

Number of c-planes: 16

Candela at center: 302 cd

**iso-lux diagram**

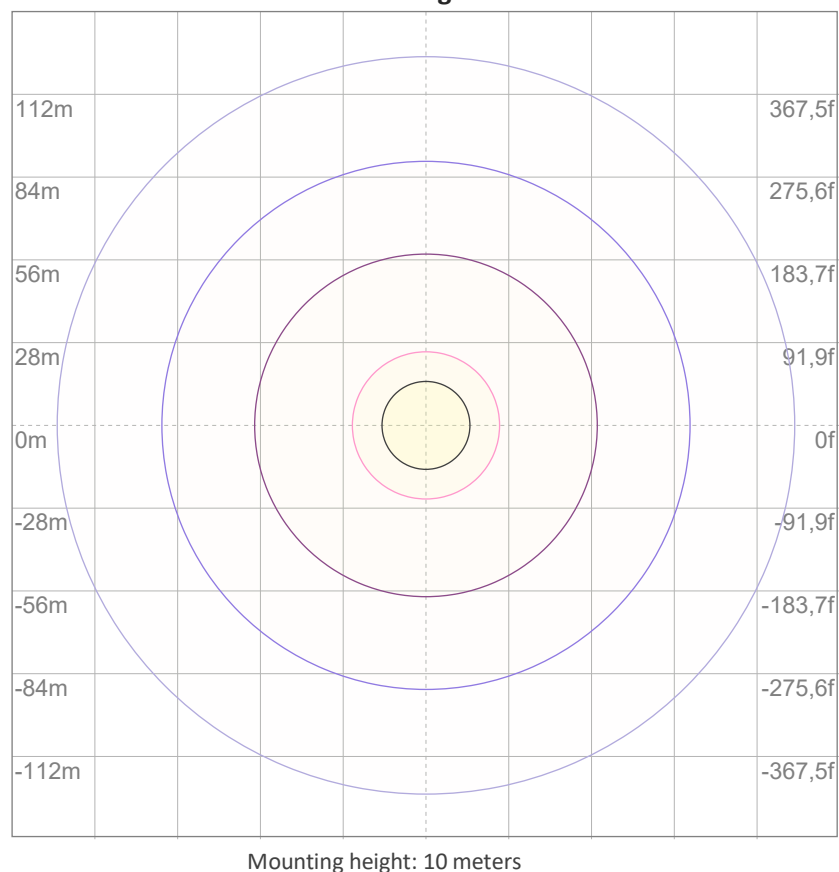

3%	90,5m lx
5%	0,151 lx
10%	0,302 lx
30%	0,905 lx
50%	1,51 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,02 lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

**Potência**



**Vttagem: 12,0 V**

**Corrente: 1,19 A**

**Frequência: 0 Hz**

**FP: 1,0**

**THD**



**THD corrente: n/a**

**THD tensão: n/a**