


R10 SLED9085 BRANCA FITA 9,6WM 3000K - 1m

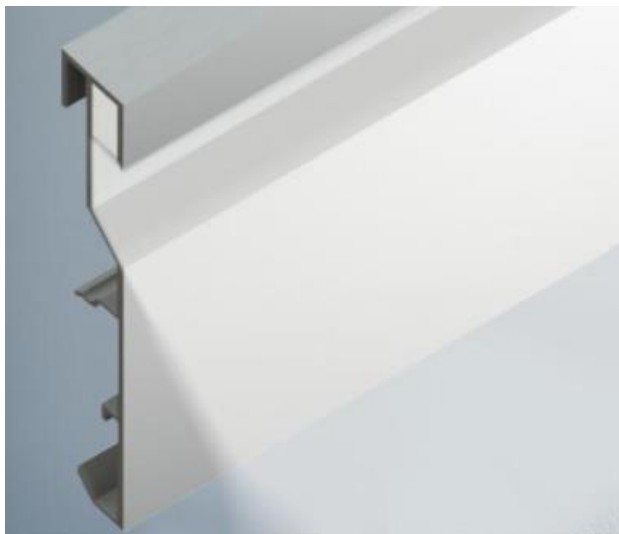

Luminária linear roda pé na parede com iluminação difusa. Corpo em alumínio extrudado com acabamento na cor branca. Difusor em emborrachado leitoso. Indicado para residência, recepção, escritório etc.

Fluxo luminoso – 159 lm/m

Potência – 9,6 W/m

Intensidade pico – 76,9cd

CCT – 2547K



IRC – 80,7

Coordenada CIE 1931 – x- 0,473 y- 0,412

A x L - 15x100

Peso - 0,7kg/m


IP - 20 - Uso Interno

IK - 00 – Não aplicável

Alimentação - 12vdc

Data do ensaio

25/03/2021 10:57:23

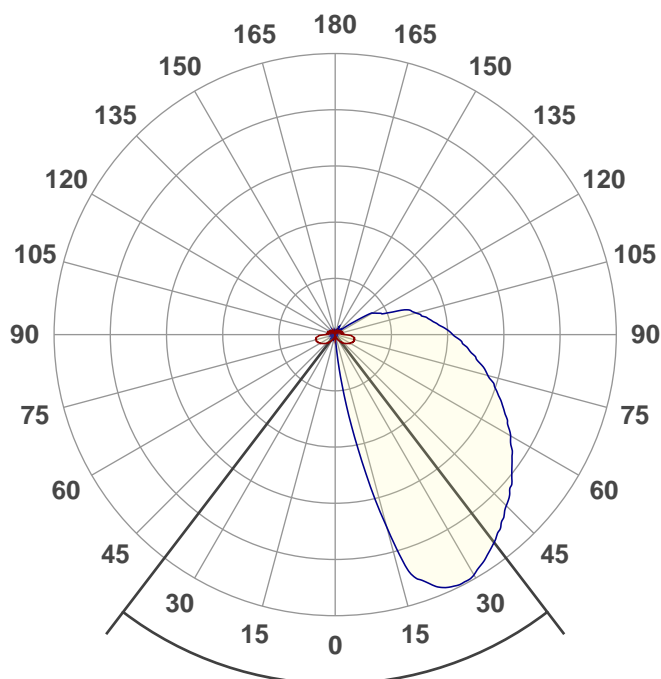

Facho de abertura

74,8°


Rf 84,1



Fidelity index Rf

Rg 94,1


Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	77	-12%	2%
2	79	-9%	8%
3	78	-4%	11%
4	90	-1%	5%
5	94	1%	3%
6	94	1%	-1%
7	88	-5%	-5%
8	91	-5%	0%
9	86	-6%	5%
10	82	-4%	11%
11	83	3%	12%
12	86	6%	1%
13	85	4%	-11%
14	78	3%	-18%
15	82	-5%	-9%
16	75	-11%	-15%

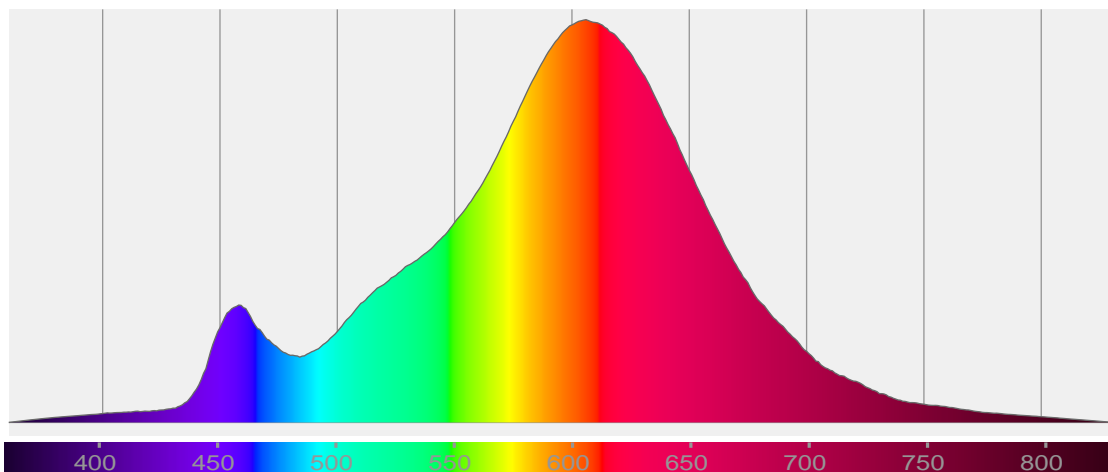


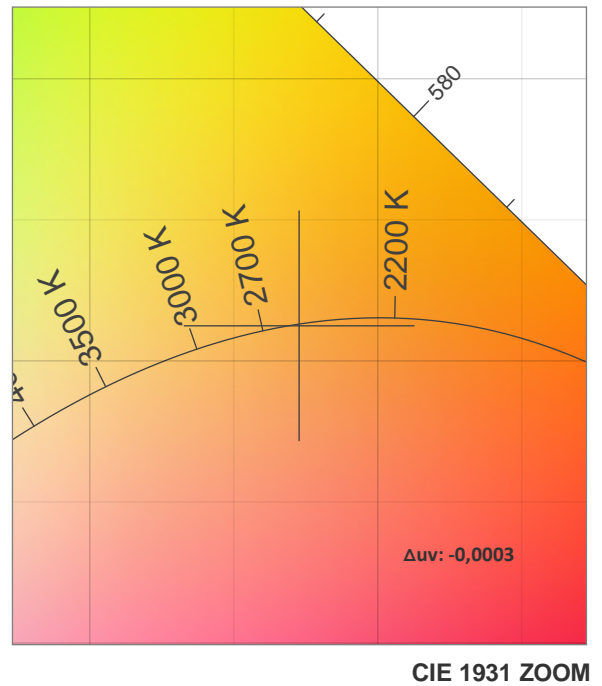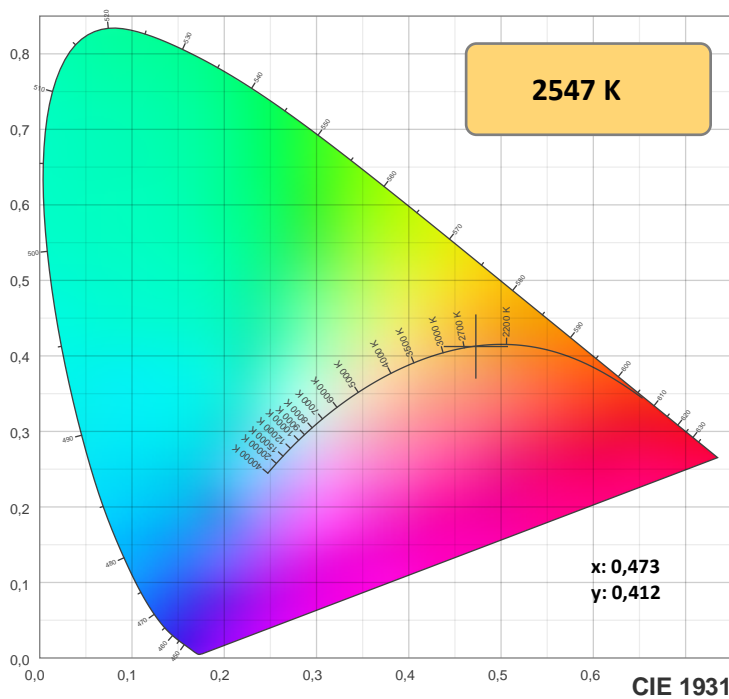

TM-30: 84,1

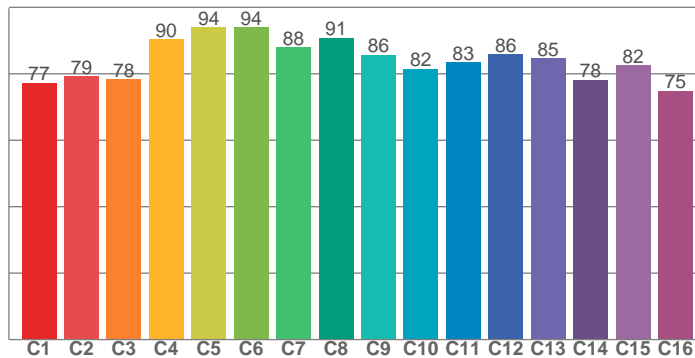

CRI: 80,7 (R1-R8)

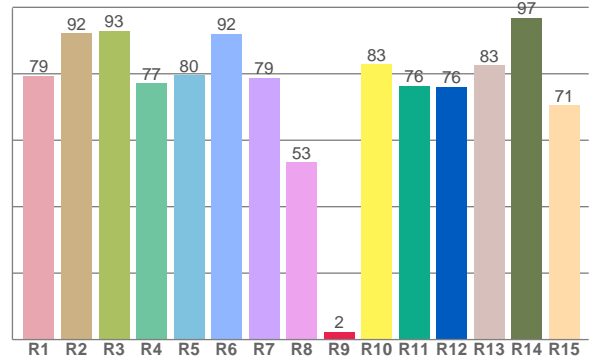

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79,4	92,2	93,0	77,2	79,6	92,1	78,8	53,3	2,4	82,9	76,4	76,1	82,5	96,9	70,5

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
77,2	79,2	78,3	90,3	94,0	94,0	88,0	90,8	85,8	81,5	83,4	85,9	84,7	78,2	82,5	74,9

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2547 K	80,7	2,4	84,1	94,1	80,4	0,473	0,412	0,270	0,353	-0,0003







Rf 84,1

Fidelity index Rf

Rg 94,1

Gamut index Rg

Hue Bin	R _i	Shifts (%)	
		Chroma	Hue
1	77	-12%	2%
2	79	-9%	8%
3	78	-4%	11%
4	90	-1%	5%
5	94	1%	3%
6	94	1%	-1%
7	88	-5%	-5%
8	91	-5%	0%
9	86	-6%	5%
10	82	-4%	11%
11	83	3%	12%
12	86	6%	1%
13	85	4%	-11%
14	78	3%	-18%
15	82	-5%	-9%
16	75	-11%	-15%

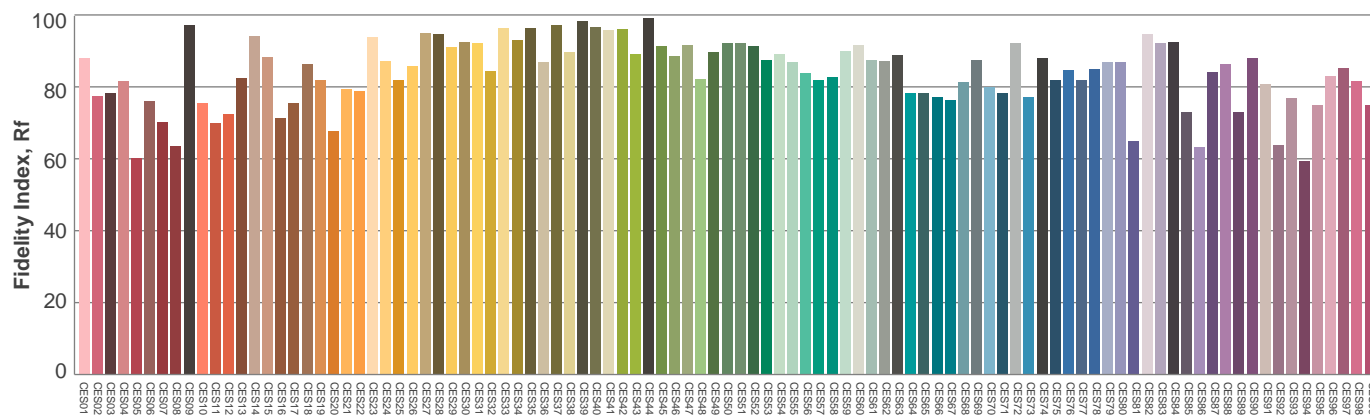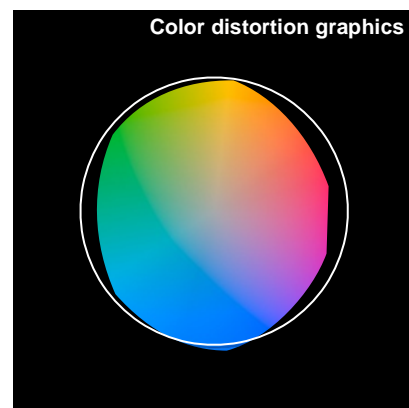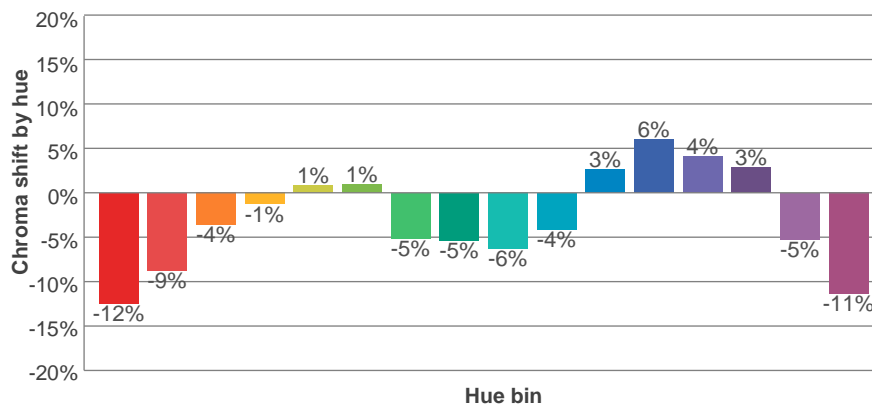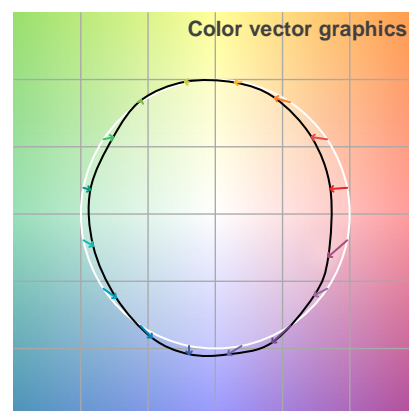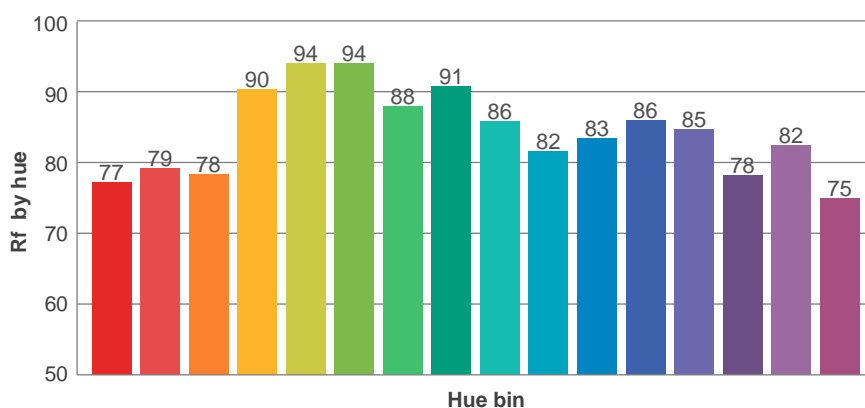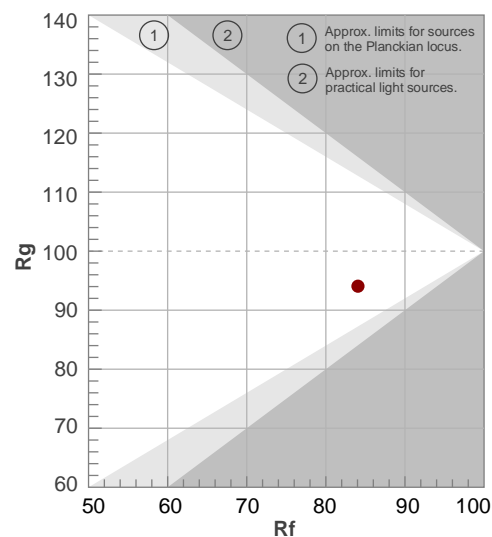

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
Standard table	n/a					n/a				
Correction summand	n/a					n/a				
Corrected glare indices referring to 159 lm total luminous flux										


www.misterled.com.br


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	115	115	115	115	110	110	110	110	101	101	101	93	93	93	86	86	86	82
1	100	94	88	83	96	90	84	79	82	78	74	75	72	68	69	66	63	60
2	89	79	70	63	85	75	68	61	69	62	57	63	57	53	57	53	49	46
3	80	67	58	50	76	64	55	48	59	51	45	53	47	42	49	44	39	36
4	72	58	48	40	68	56	46	39	51	43	37	46	40	34	42	37	32	29
5	66	51	41	33	62	49	39	32	45	37	30	41	34	28	37	31	27	24
6	60	45	35	28	57	43	34	27	40	32	26	36	29	24	33	27	22	20
7	55	40	31	24	52	39	30	23	35	28	22	32	26	20	30	24	19	17
8	51	36	27	21	48	35	26	20	32	24	19	29	23	18	27	21	16	14
9	47	33	24	18	45	31	23	17	29	22	16	27	20	15	24	19	14	12
10	44	30	21	16	42	29	21	15	26	19	14	24	18	13	22	17	13	11

Quantidade de luminárias

Luminaire budgetary diagram

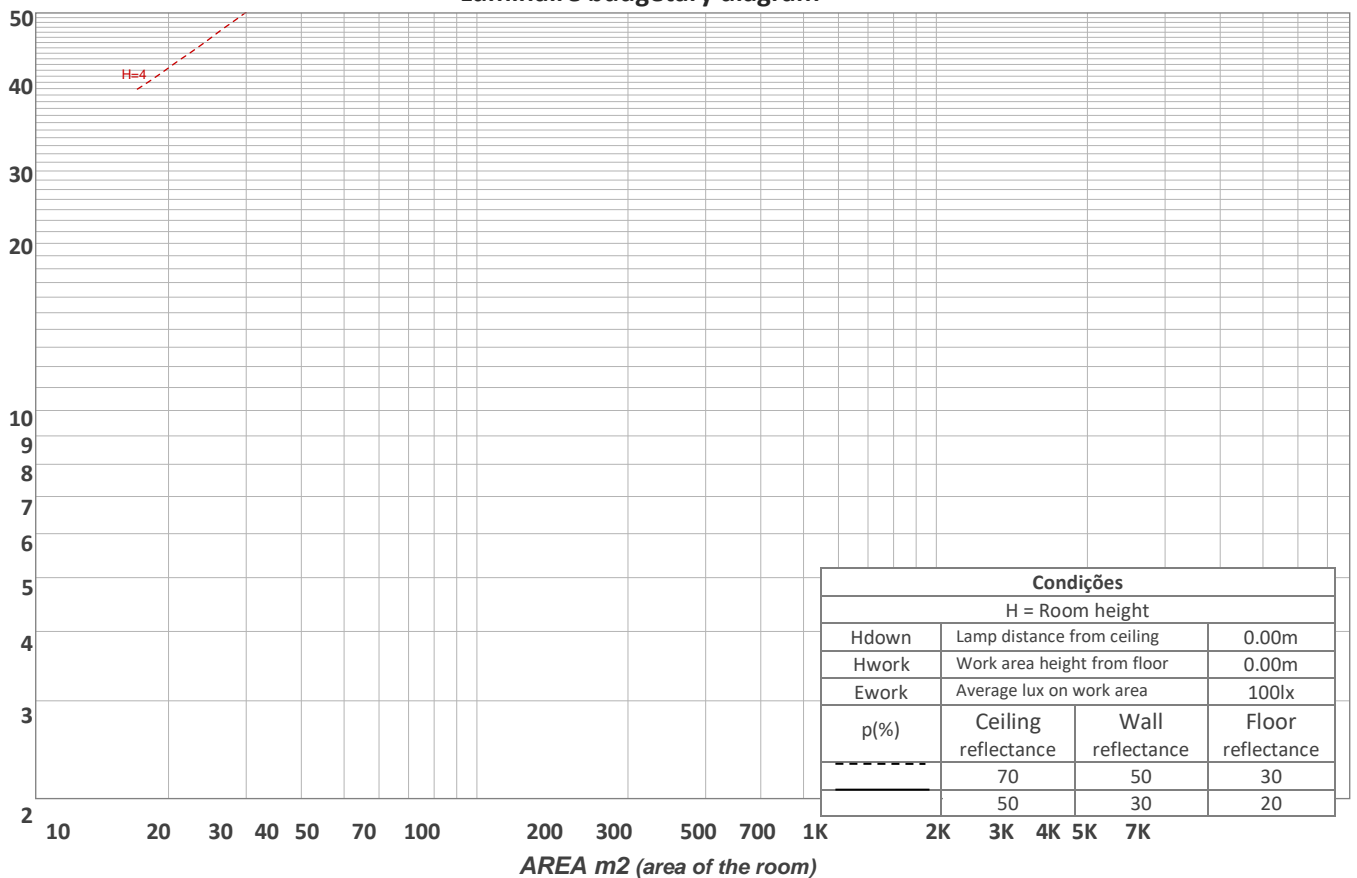

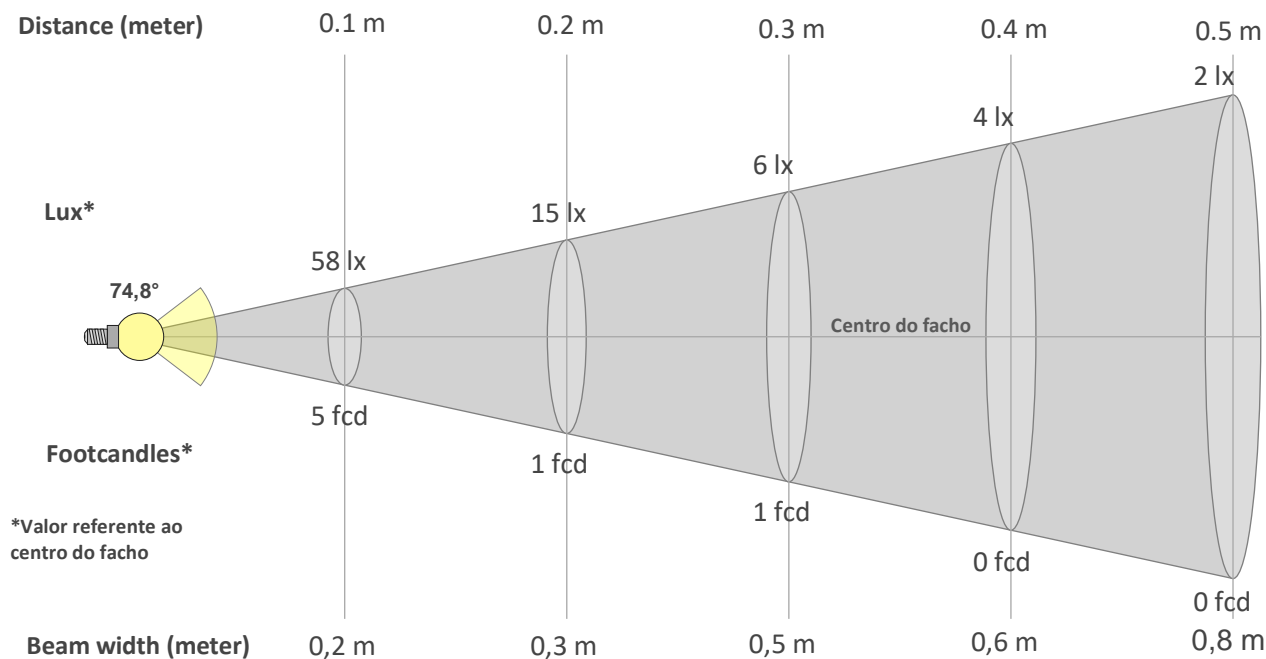

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
0,1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
0,58	0,61	0,68	0,85	1,12	1,41	1,80	2,35	2,85	3,31	3,78	4,26	4,74	5,20	5,40	5,37	5,42	4,61	2,63	2,12
100%	104%	117%	147%	193%	243%	310%	406%	491%	571%	652%	734%	818%	897%	931%	926%	935%	795%	453%	365%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
0,6	3,7	24,9	54,9	72,4	76,5	76,4	73,5	70,3	66,6	63,5	59,4	55,7	51,6	47,6	43,5	39,5	36,0	32,4	28,9
100%	632%	4293%	9462%	12477%	13184%	13167%	12666%	12118%	11482%	10941%	10244%	9609%	8893%	8213%	7506%	6814%	6212%	5583%	4977%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
0,58	0,61	0,68	0,85	1,12	1,41	1,80	2,35	2,85	3,31	3,78	4,26	4,74	5,20	5,40	5,37	5,42	4,61	2,63	2,12
100%	104%	117%	147%	193%	243%	310%	406%	491%	571%	652%	734%	818%	897%	931%	926%	935%	795%	453%	365%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
0,580	0,469	0,548	0,527	0,573	0,455	0,498	0,378	0,445	0,451	0,496	0,412	0,512	0,545	0,419	0,573	0,536	0,531	0,529	0,530
100%	81%	95%	91%	99%	78%	86%	65%	77%	78%	85%	71%	88%	94%	72%	99%	92%	92%	91%	91%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,8°	137,5°	194,6°	48,7%	27,7%

iso-candela diagram

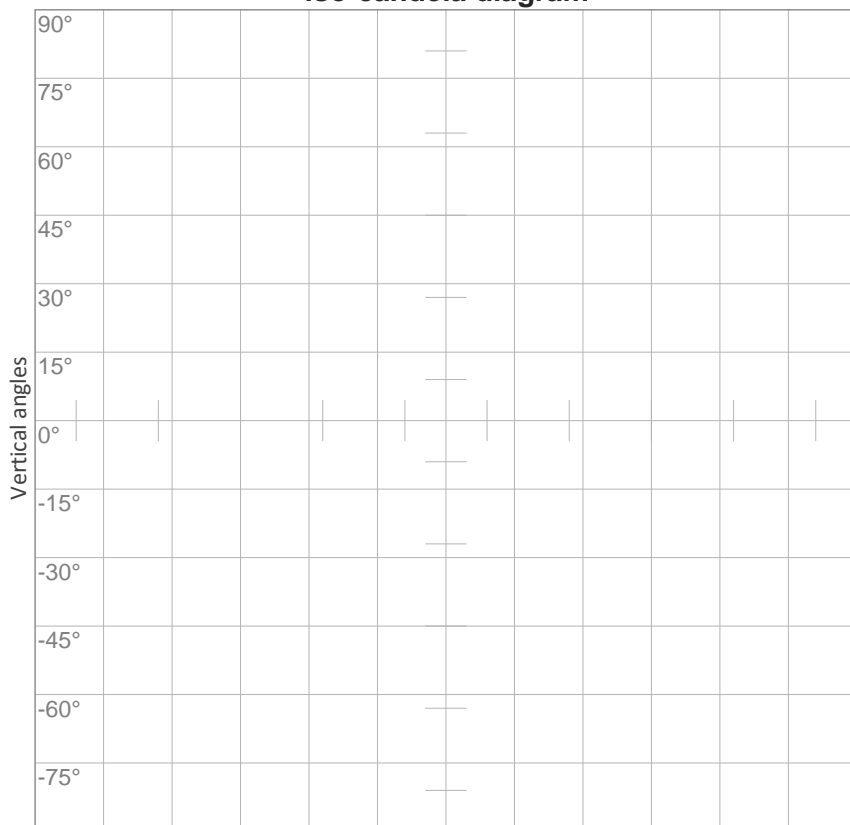

Horizontal angles


10%	0 cd
20%	0 cd
30%	0 cd
40%	0 cd
50%	0 cd
60%	0 cd
70%	0 cd
80%	0 cd
90%	1 cd

Conditions:

Number of c-planes: 16

Candela at center: 1 cd

iso-lux diagram

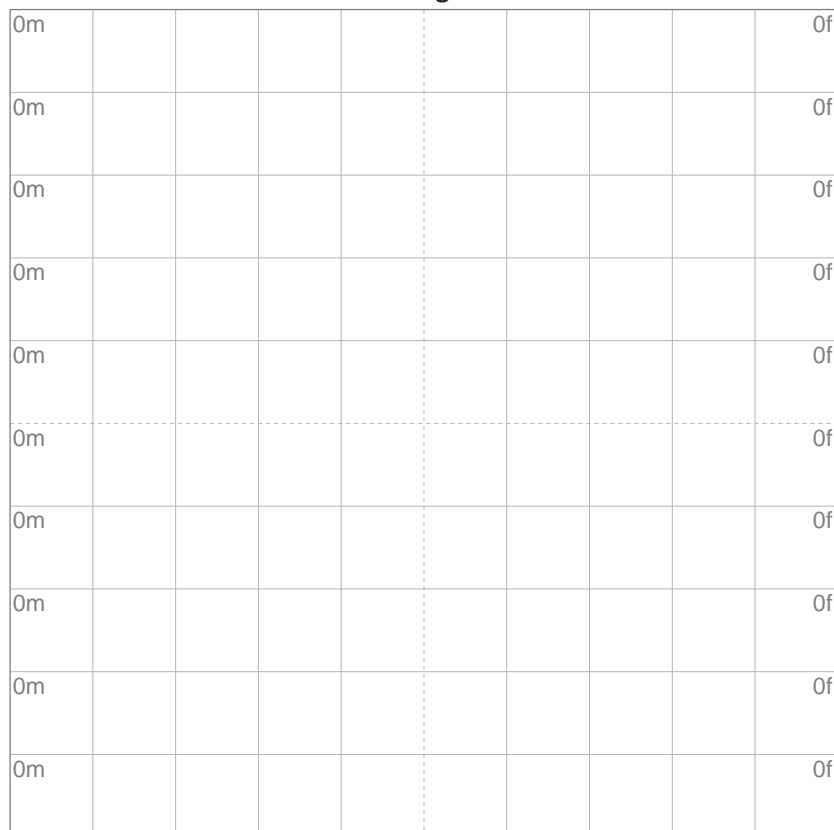

Mounting height: 10 meters

3%	174u lx
5%	290u lx
10%	580u lx
30%	1,74m lx
50%	2,90m lx

Conditions:

Number of c-planes: 16

Lux at center: 5,80m lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência

Vttagem: 12,0 V

Corrente: 0,800 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a