


9003 SLED9003 BRANCA FITA 20WM 3500K 95 - 1m

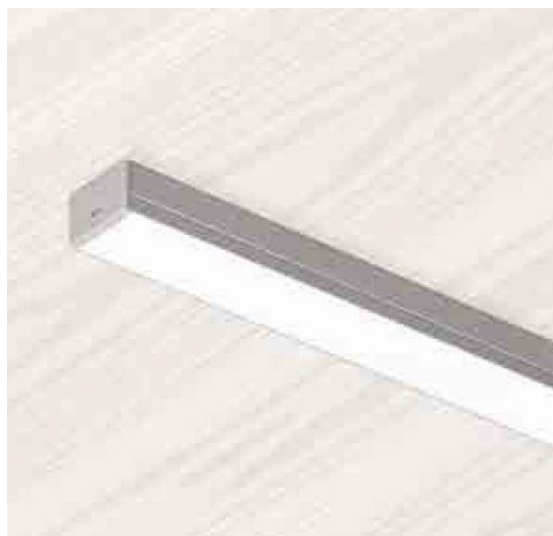

Luminária linear de sobrepor em forro de gesso ou Dry-wall com iluminação difusa. Corpo em alumínio extrudado com acabamento na cor branca. Difusor em acrílico extrudado leitoso. Indicado para residência, recepção, escritório etc.

Fluxo luminoso – 1180 lm/m

Potência – 20,6 W/m

Intensidade pico – 421cd

CCT – 3423K



IRC – 97,3

Coordenada CIE 1931 – x- 0,409 y- 0,391

A x L - 12x24

Peso - 0,15kg/m


IP - 20 - Uso Interno

IK - 00 – Não aplicável

Alimentação - 12vdc

Data do ensaio

08/03/2022 09:39:39

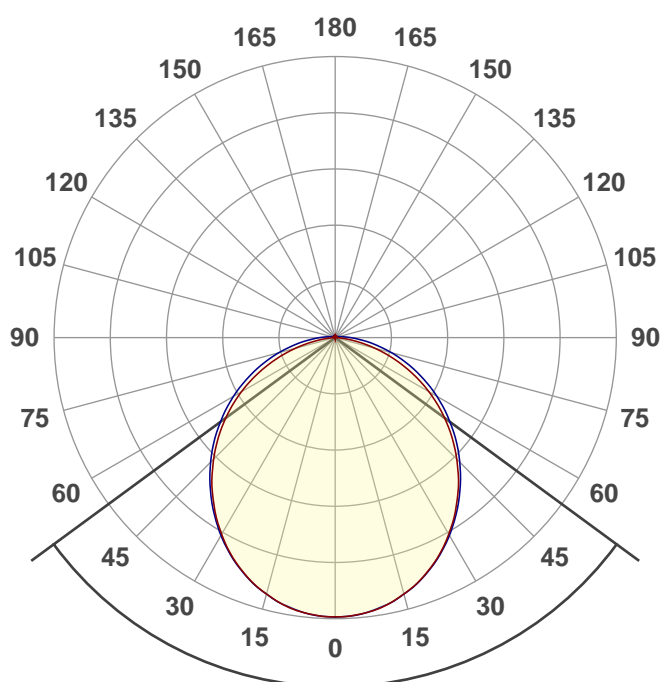

Facho de abertura

107,4°


Rf 94,0



Fidelity index Rf

Rg 100,7


Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	95	-2%	0%
2	97	-1%	1%
3	95	0%	2%
4	96	-1%	0%
5	94	-3%	1%
6	97	1%	1%
7	96	-1%	1%
8	99	0%	0%
9	95	-1%	4%
10	91	0%	6%
11	89	2%	7%
12	92	5%	2%
13	95	2%	-2%
14	92	5%	-4%
15	92	1%	-4%
16	91	1%	-5%

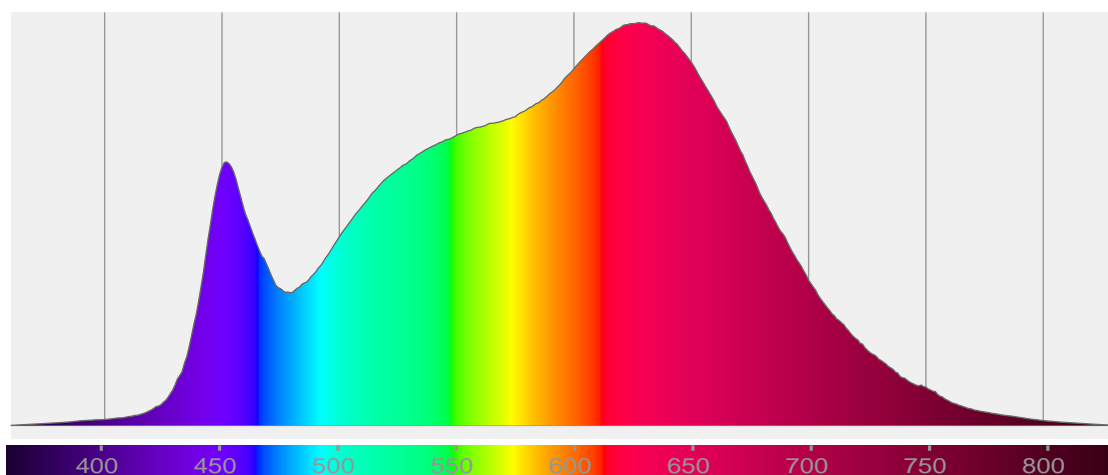


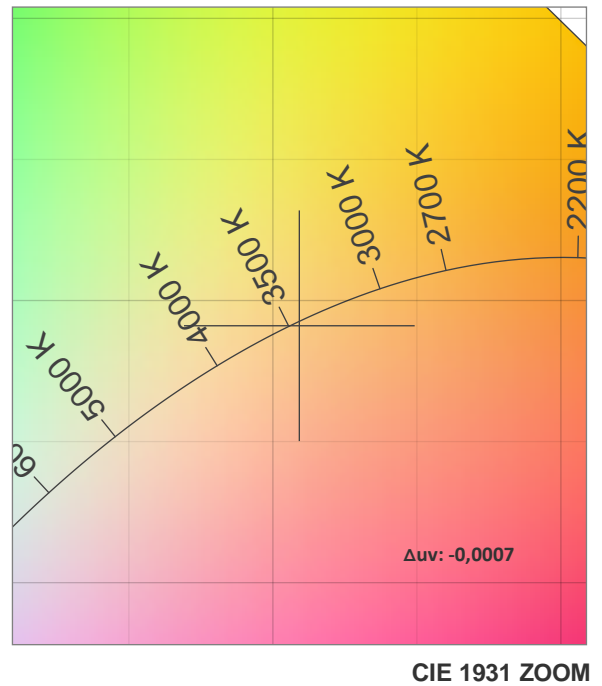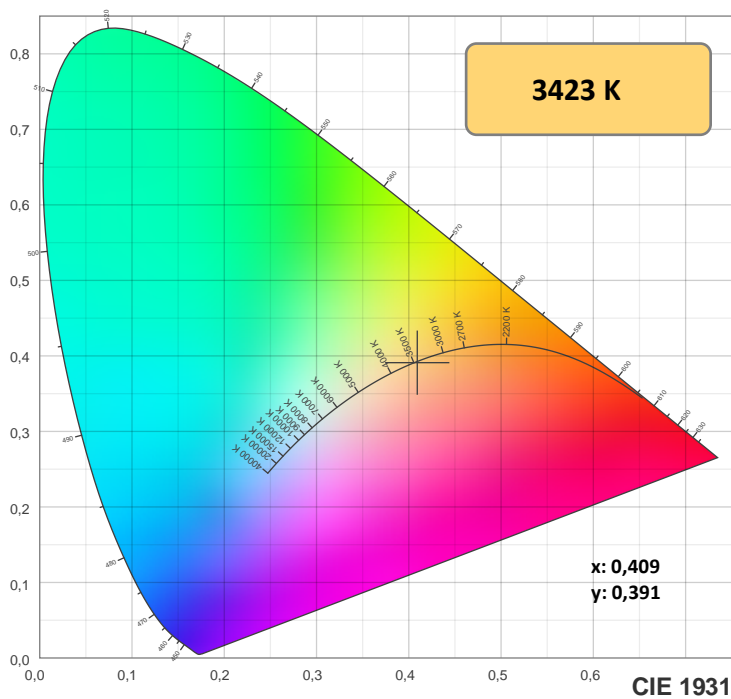

TM-30: 94,0

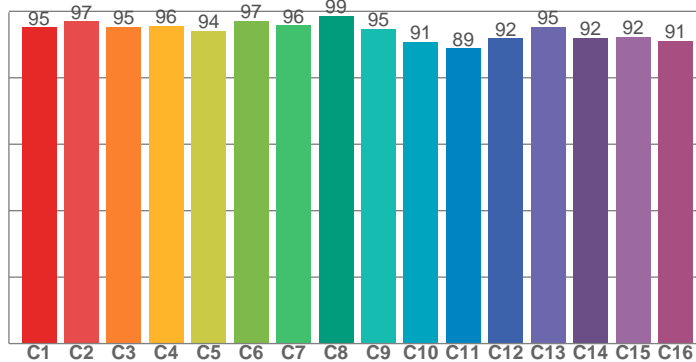

CRI: 97,3 (R1-R8)

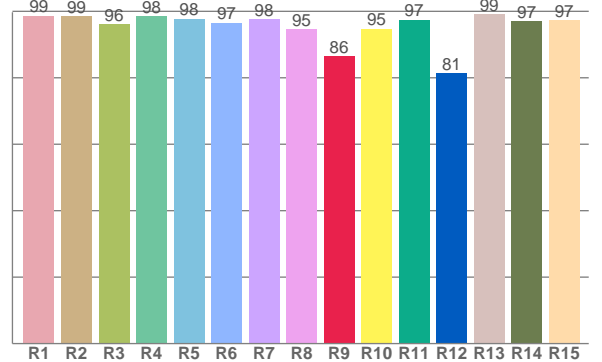

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98,7	98,6	96,1	98,4	97,7	96,6	97,5	94,7	86,5	94,8	97,5	81,4	99,1	97,0	97,2

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95,1	97,0	95,3	95,6	94,2	97,1	95,8	98,6	94,7	90,9	88,9	91,9	95,3	92,0	92,4	91,1

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3423 K	97,3	86,5	94,0	100,7	95,3	0,409	0,391	0,238	0,341	-0,0007







Rf 94,0

Fidelity index R_f

Rg 100,7

Gamut index Rg

		Shifts (%)	
Hue Bin	R_t	Chroma	Hue
1	95	-2%	0%
2	97	-1%	1%
3	95	0%	2%
4	96	-1%	0%
5	94	-3%	1%
6	97	1%	1%
7	96	-1%	1%
8	99	0%	0%
9	95	-1%	4%
10	91	0%	6%
11	89	2%	7%
12	92	5%	2%
13	95	2%	-2%
14	92	5%	-4%
15	92	1%	-4%
16	91	1%	-5%

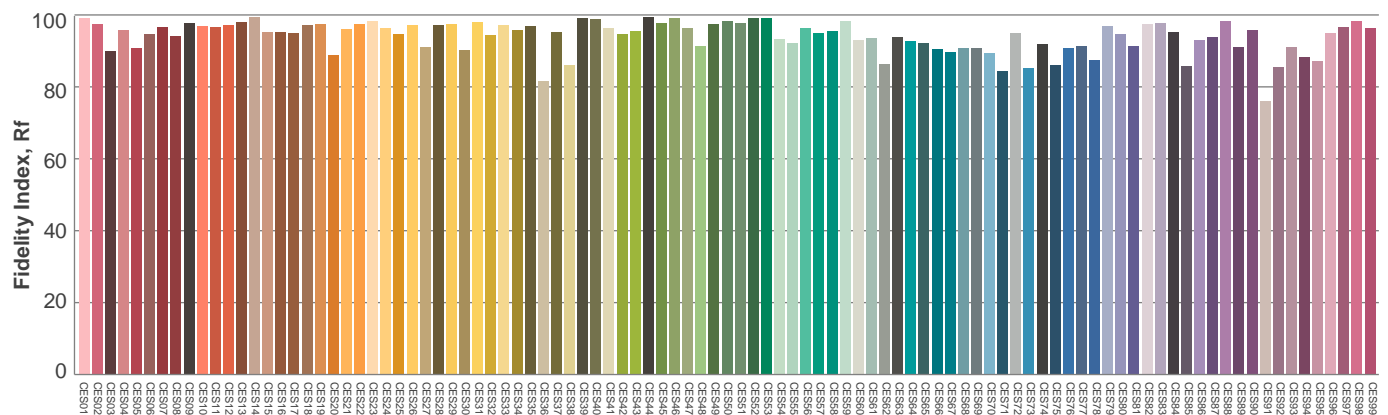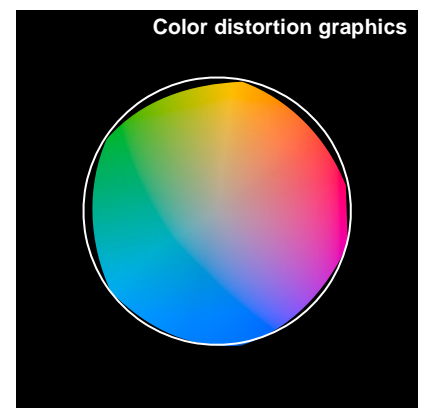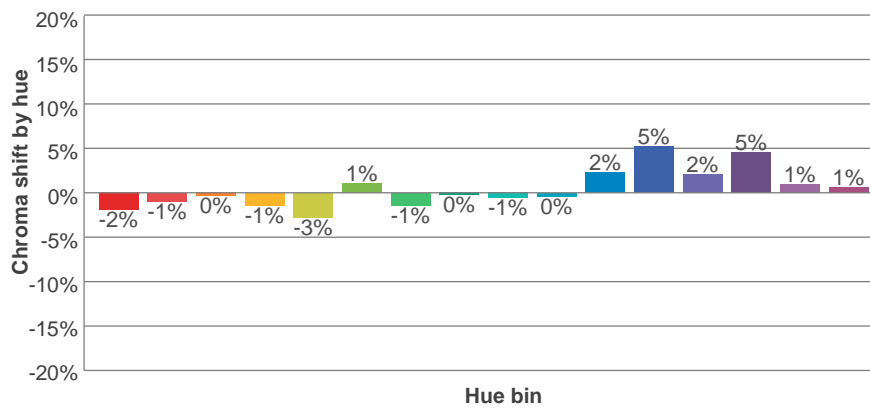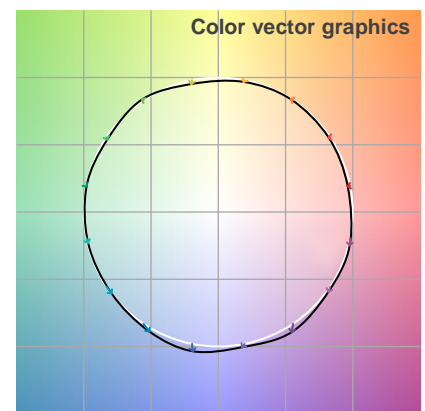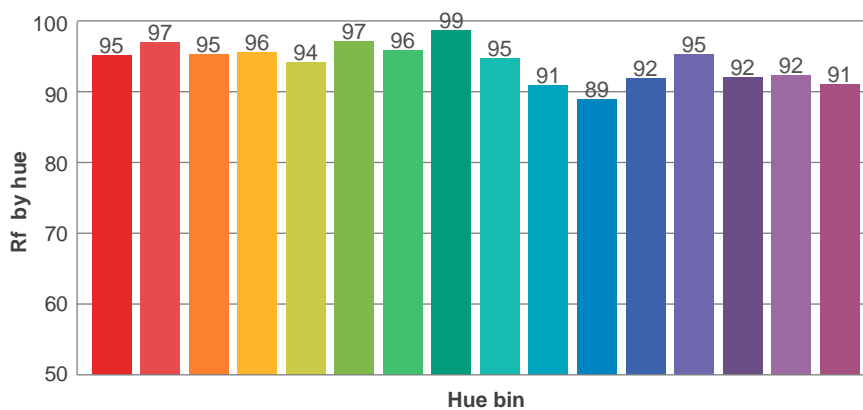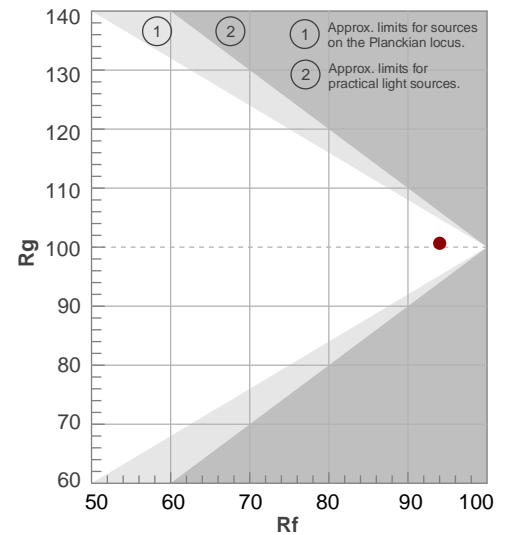

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,5	22,7	21,8	23,0	23,3	22,1	23,3	22,3	23,6	23,9
	3H	22,7	24,0	23,1	24,3	24,5	23,6	24,9	24,1	25,2	25,5
	4H	23,2	24,3	23,6	24,7	25,0	24,4	25,6	24,8	25,9	26,2
	6H	23,5	24,5	23,8	24,8	25,3	25,1	26,2	25,5	26,5	26,9
	8H	23,5	24,5	23,9	24,9	25,3	25,4	26,5	25,8	26,8	27,2
	12H	23,5	24,5	23,9	24,9	25,3	25,7	26,7	26,1	27,1	27,6
4H	2H	22,1	23,3	22,6	23,6	23,9	22,6	23,8	23,0	24,1	24,4
	3H	23,7	24,7	24,1	25,0	25,5	24,5	25,5	24,9	25,8	26,3
	4H	24,2	25,1	24,6	25,5	26,1	25,3	26,2	25,8	26,7	27,2
	6H	24,5	25,4	25,0	25,8	26,2	26,1	27,0	26,6	27,4	27,8
	8H	24,6	25,4	25,1	25,8	26,2	26,5	27,3	27,0	27,7	28,1
	12H	24,6	25,3	25,1	25,7	26,2	26,9	27,5	27,4	28,0	28,5
8H	4H	24,5	25,3	25,0	25,7	26,1	25,5	26,3	26,1	26,7	27,1
	6H	25,0	25,6	25,6	26,1	26,7	26,5	27,1	27,1	27,6	28,2
	8H	25,2	25,7	25,7	26,3	27,0	27,0	27,6	27,6	28,1	28,8
	12H	25,3	25,7	25,9	26,3	26,9	27,5	28,0	28,1	28,5	29,2
12H	4H	24,6	25,2	25,1	25,7	26,2	25,5	26,2	26,0	26,6	27,2
	6H	25,2	25,7	25,7	26,2	26,9	26,6	27,1	27,1	27,7	28,3
	8H	25,4	25,8	26,0	26,3	27,0	27,1	27,6	27,7	28,1	28,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,3					0,1 / -0,1				
S = 2.0H		0,5 / -0,7					0,3 / -0,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1180 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	99	95	105	101	97	93	96	93	90	92	89	87	88	86	84	81
2	98	90	83	77	95	88	81	76	84	78	74	80	76	72	77	73	70	68
3	89	79	71	64	87	77	69	63	74	67	62	71	65	61	68	63	59	57
4	82	70	61	54	79	68	60	54	66	59	53	63	57	52	61	55	51	49
5	75	62	53	47	73	61	53	46	59	51	46	57	50	45	55	49	44	42
6	70	56	47	41	68	55	47	41	53	46	40	51	45	40	50	44	39	37
7	65	51	42	36	63	50	42	36	48	41	36	47	40	35	45	39	35	33
8	60	47	38	32	58	46	38	32	44	37	32	43	36	31	42	36	31	29
9	56	43	35	29	55	42	34	29	41	34	29	40	33	28	38	33	28	26
10	53	40	32	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

Quantidade de luminárias

Luminaire budgetary diagram

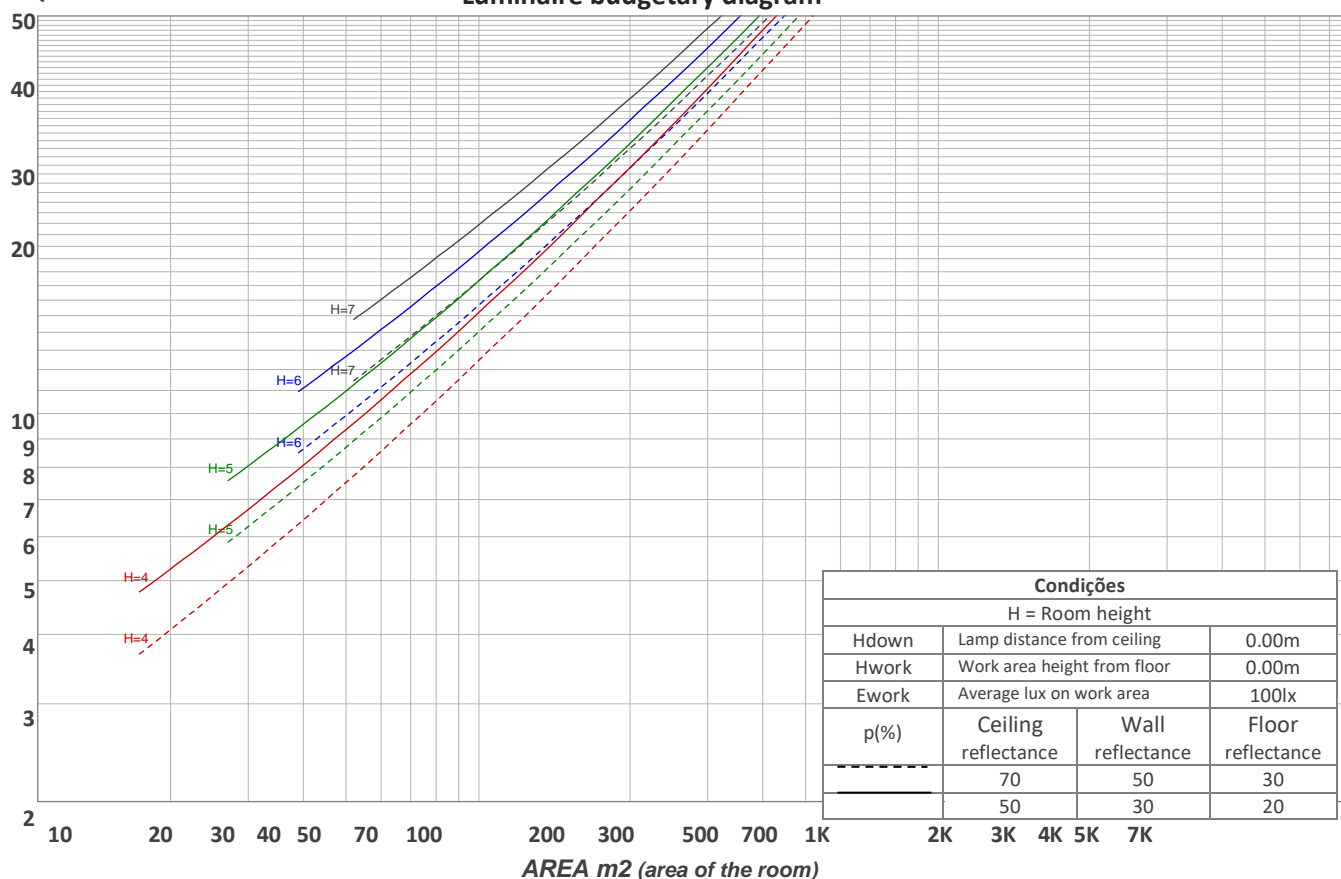

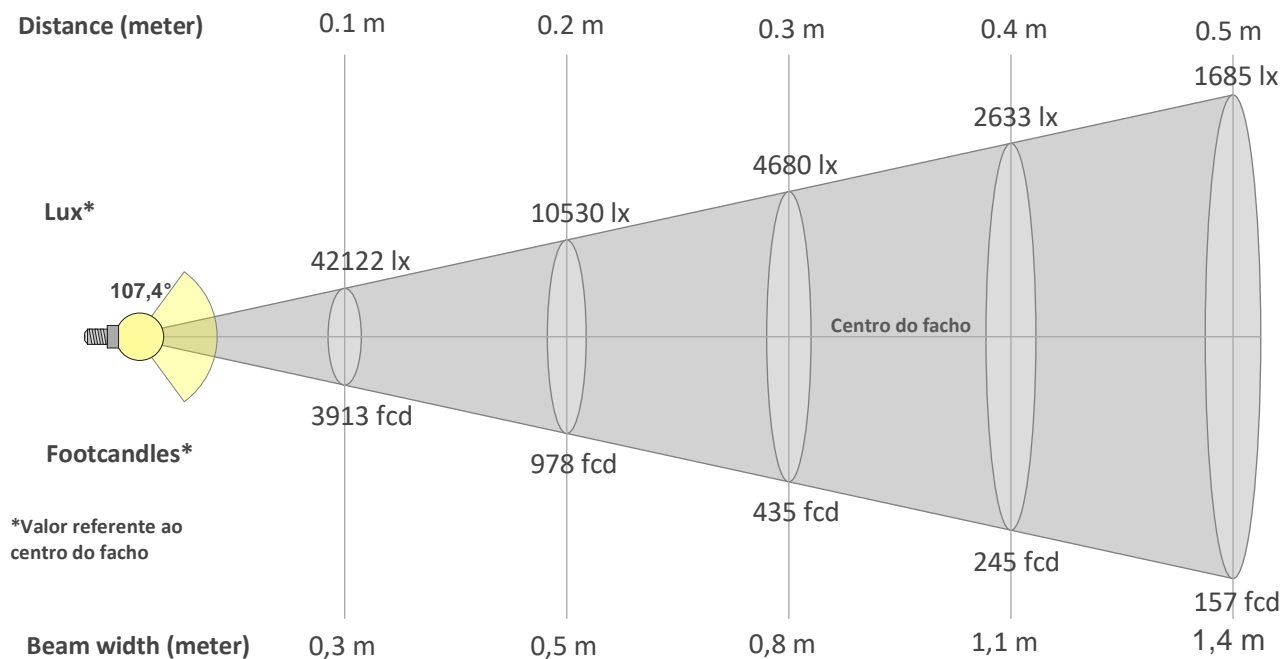

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
421lx	105lx	47lx	26lx	17lx	12lx	9lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx
39,1fcd	9,8fcd	4,3fcd	2,4fcd	1,6fcd	1,1fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
421	419	412	400	385	365	342	317	289	259	228	196	163	129	95	62	32	10	2	3
100%	99%	98%	95%	91%	87%	81%	75%	69%	62%	54%	47%	39%	31%	23%	15%	8%	2%	1%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
421	419	411	400	385	367	344	320	293	265	237	207	177	146	117	88	62	39	23	13
100%	99%	98%	95%	91%	87%	82%	76%	70%	63%	56%	49%	42%	35%	28%	21%	15%	9%	6%	3%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
421	419	412	400	385	365	342	317	289	259	228	196	163	129	95	62	32	10	2	3
100%	99%	98%	95%	91%	87%	81%	75%	69%	62%	54%	47%	39%	31%	23%	15%	8%	2%	1%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
421	419	411	400	385	367	344	320	293	265	237	207	177	146	117	88	62	39	23	13
100%	99%	98%	95%	91%	87%	82%	76%	70%	63%	56%	49%	42%	35%	28%	21%	15%	9%	6%	3%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
107,4°	163,6°	184°	76,6%	52,8%

iso-candela diagram

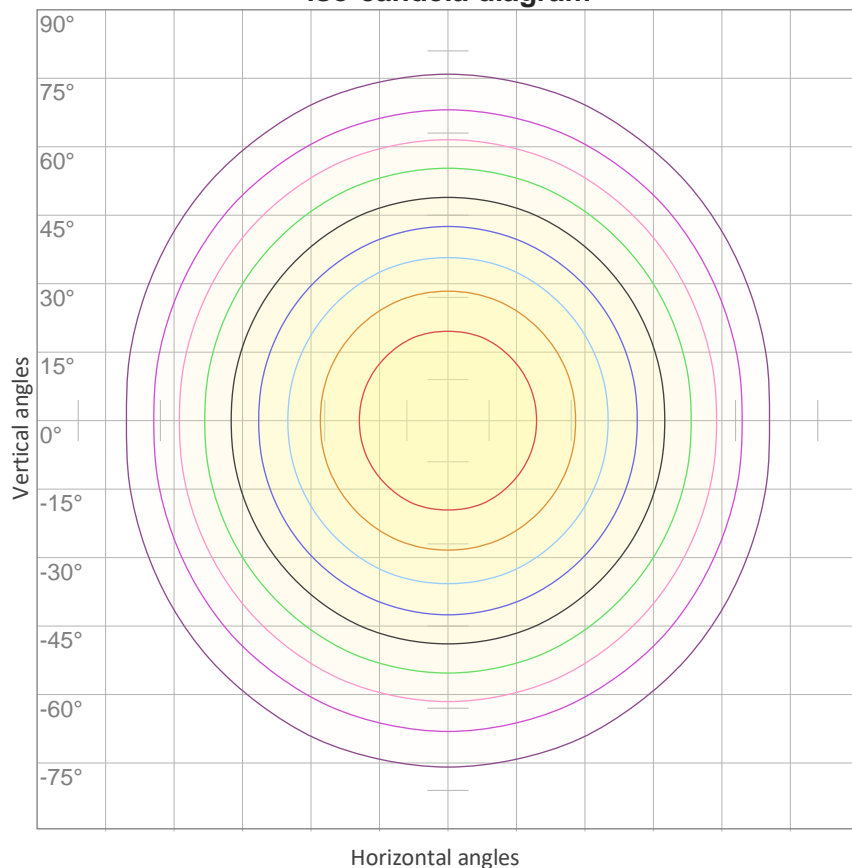


10%	42 cd
20%	84 cd
30%	126 cd
40%	168 cd
50%	211 cd
60%	253 cd
70%	295 cd
80%	337 cd
90%	379 cd

Conditions:

Number of c-planes: 16

Candela at center: 421 cd

iso-lux diagram

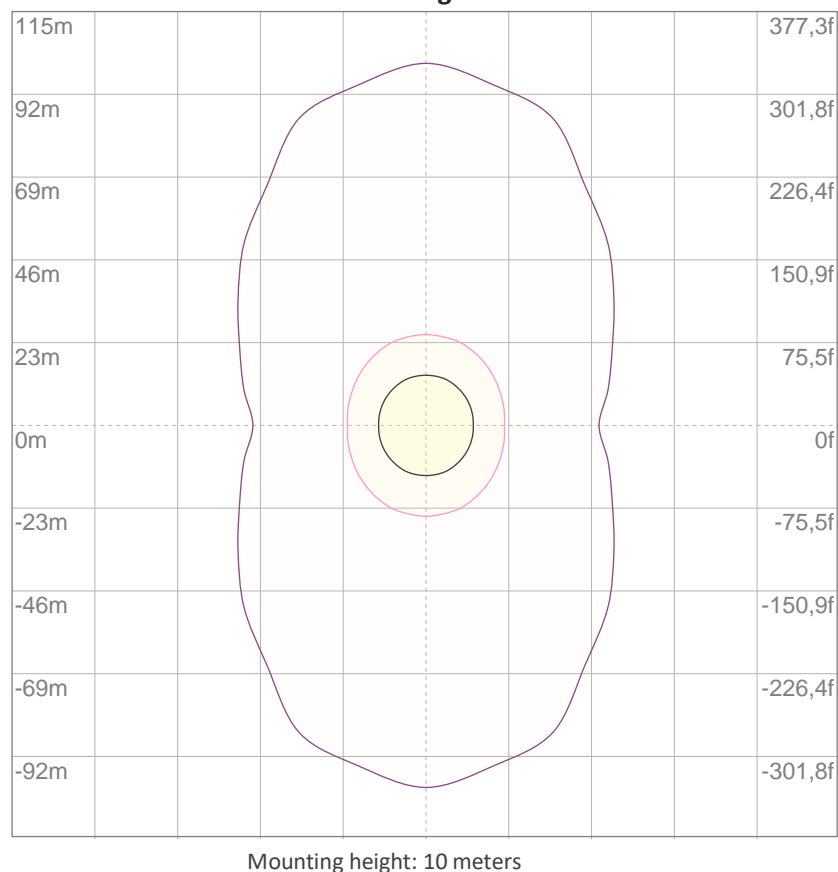

3%	0,126 lx
5%	0,211 lx
10%	0,421 lx
30%	1,26 lx
50%	2,11 lx

Conditions:

Number of c-planes: 16

Lux at center: 4,21 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência

Vttagem: 12,0 V

Corrente: 1,72 A

Frequência: 0 Hz

FP: 0,99

THD



THD corrente: n/a

THD tensão: n/a