

SLED9122SR LUMINARIA LINEAR DE SOBREPOR 2x2 19Wm 2700K 80 1M



Fluxo luminoso – 1140 lm/m

Potência – 19,3 W/m

Intensidade pico – 459cd

CCT – 2756K




IRC – 83,1

Coordenada CIE 1931 – x- 0,460 y- 0,418

Data do ensaio

27/08/2024 10:55:32

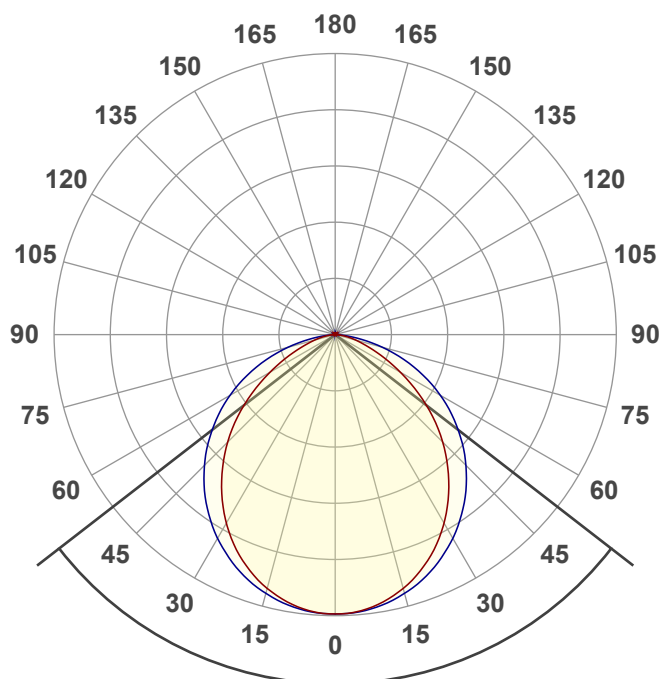

Facho de abertura

104,5°


Rf 86,2



Fidelity index Rf

Rg 93,2


Gamut index Rg

		Shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	79	-11%	1%
2	83	-8%	6%
3	83	-4%	8%
4	93	-3%	2%
5	95	-2%	2%
6	94	-2%	-1%
7	88	-7%	-3%
8	92	-4%	3%
9	88	-5%	5%
10	85	-2%	9%
11	86	1%	10%
12	87	6%	-1%
13	86	3%	-11%
14	79	2%	-17%
15	84	-5%	-8%
16	76	-10%	-15%

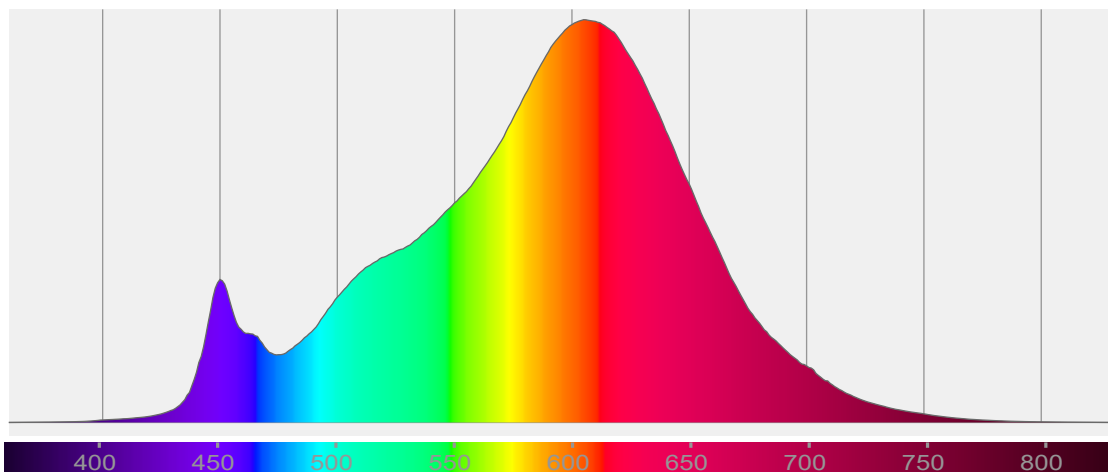


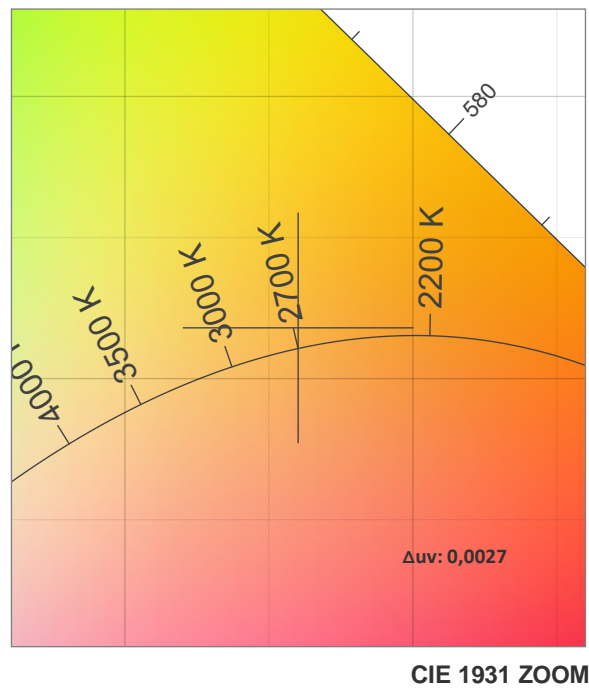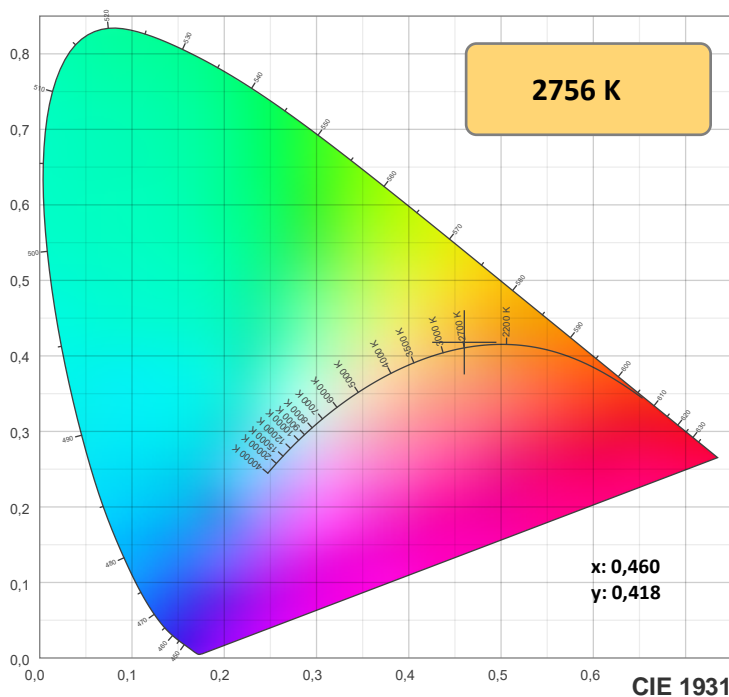

TM-30: 86,2

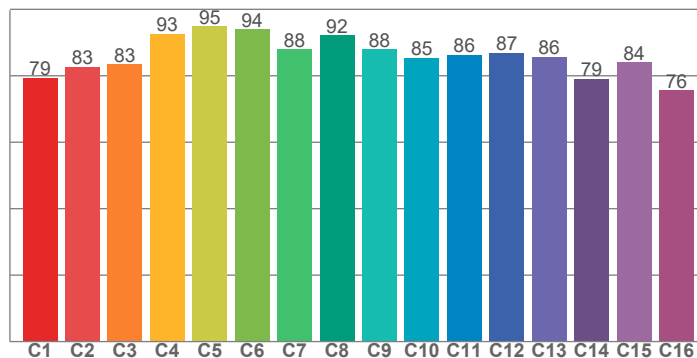

CRI: 83,1 (R1-R8)

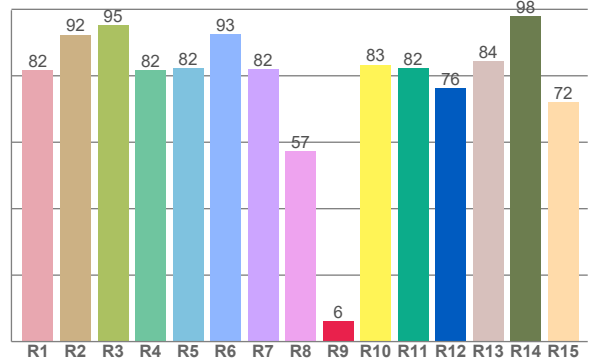

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81,7	92,3	95,2	81,7	82,2	92,6	81,9	57,3	6,2	83,4	82,3	76,3	84,4	97,9	72,0

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,3	82,7	83,5	92,6	94,9	93,9	88,0	92,2	88,0	85,4	86,3	86,9	85,8	79,1	84,0	75,7

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2756 K	83,1	6,2	86,2	93,2	83,5	0,460	0,418	0,259	0,353	0,0027







Rf 86,2

Fidelity index Rf

Rg 93,2

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	79	-11%	1%
2	83	-8%	6%
3	83	-4%	8%
4	93	-3%	2%
5	95	-2%	2%
6	94	-2%	-1%
7	88	-7%	-3%
8	92	-4%	3%
9	88	-5%	5%
10	85	-2%	9%
11	86	1%	10%
12	87	6%	-1%
13	86	3%	-11%
14	79	2%	-17%
15	84	-5%	-8%
16	76	-10%	-15%

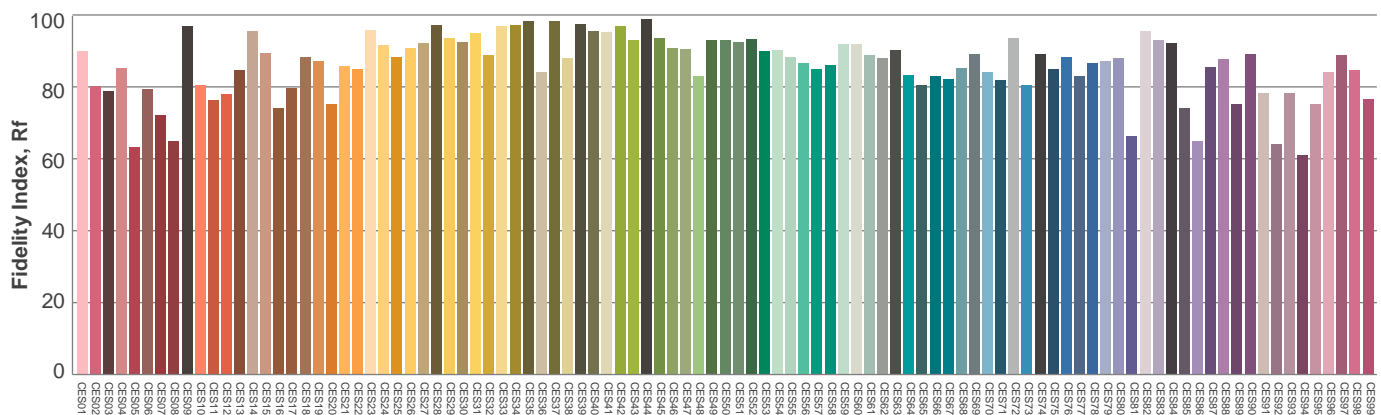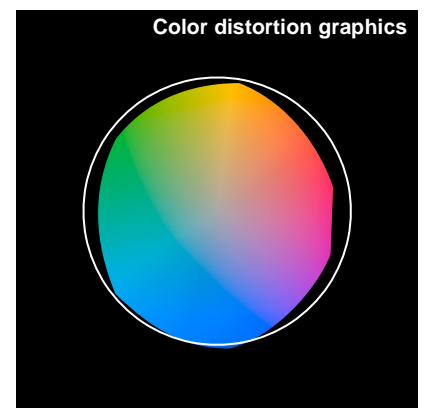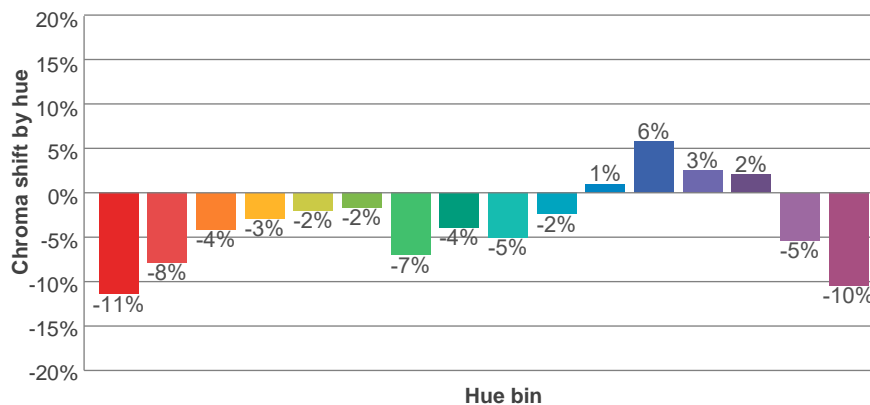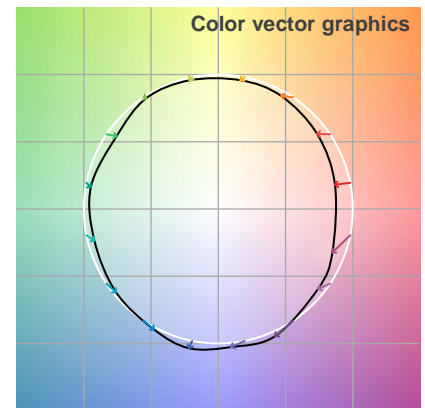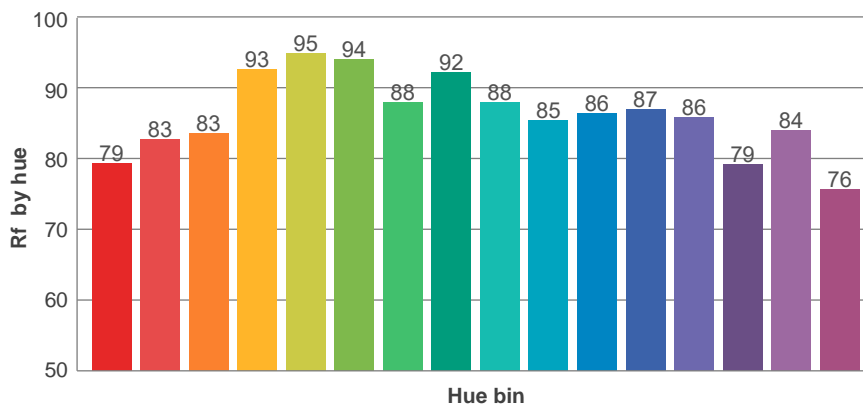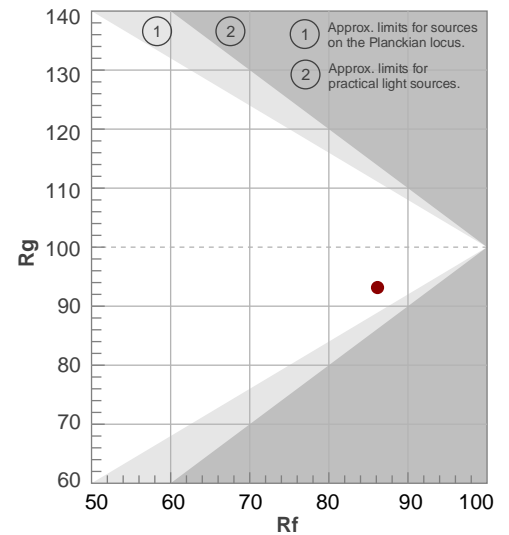

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,5	22,7	21,7	23,0	23,2	23,2	24,4	23,4	24,7	24,9
	3H	22,2	23,4	22,6	23,6	23,8	24,6	25,8	25,0	26,1	26,3
	4H	22,4	23,5	22,8	23,8	24,1	25,2	26,3	25,6	26,6	26,9
	6H	22,6	23,6	22,9	23,9	24,3	25,6	26,6	25,9	26,9	27,2
	8H	22,6	23,6	23,0	23,9	24,3	25,7	26,6	26,0	26,9	27,3
	12H	22,6	23,5	23,0	23,9	24,3	25,7	26,6	26,0	26,9	27,4
4H	2H	22,1	23,3	22,5	23,5	23,8	23,5	24,6	23,9	24,9	25,2
	3H	23,1	24,0	23,4	24,3	24,8	25,2	26,1	25,6	26,5	26,9
	4H	23,3	24,1	23,7	24,6	25,1	25,8	26,7	26,2	27,1	27,6
	6H	23,5	24,3	24,0	24,7	25,1	26,2	27,1	26,7	27,4	27,8
	8H	23,5	24,3	24,1	24,7	25,1	26,3	27,1	26,9	27,5	27,8
	12H	23,6	24,2	24,1	24,6	25,1	26,4	27,0	26,9	27,4	27,9
8H	4H	23,5	24,3	24,0	24,6	25,0	25,8	26,6	26,4	27,0	27,3
	6H	23,8	24,4	24,3	24,9	25,4	26,4	26,9	26,9	27,4	27,9
	8H	24,0	24,4	24,5	25,0	25,6	26,6	27,0	27,1	27,6	28,2
	12H	24,0	24,4	24,6	24,9	25,5	26,6	27,0	27,2	27,5	28,2
12H	4H	23,5	24,1	24,0	24,6	25,1	25,8	26,4	26,3	26,9	27,3
	6H	23,9	24,4	24,4	24,9	25,5	26,4	26,9	26,9	27,4	28,0
	8H	24,0	24,4	24,6	24,9	25,5	26,6	27,0	27,1	27,5	28,1
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,2 / -0,3					0,1 / -0,1				
S = 1.5H		0,5 / -0,8					0,2 / -0,3				
S = 2.0H		1,0 / -1,6					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1140 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	100	92	86	81	98	90	85	80	87	82	78	84	80	76	81	77	74	72
3	92	82	74	68	89	80	73	67	77	71	66	74	69	65	72	67	63	61
4	84	73	64	58	82	71	63	57	69	62	56	66	60	56	64	59	55	53
5	77	65	56	50	75	64	56	50	62	55	49	60	53	49	58	52	48	46
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	42	40
7	66	53	45	39	65	52	44	39	51	44	38	49	43	38	48	42	38	36
8	62	49	40	35	60	48	40	35	47	39	34	45	39	34	44	38	34	32
9	58	45	37	31	56	44	36	31	43	36	31	42	35	31	41	35	31	29
10	54	41	33	28	53	41	33	28	40	33	28	39	32	28	38	32	28	26

Quantidade de luminárias

Luminaire budgetary diagram

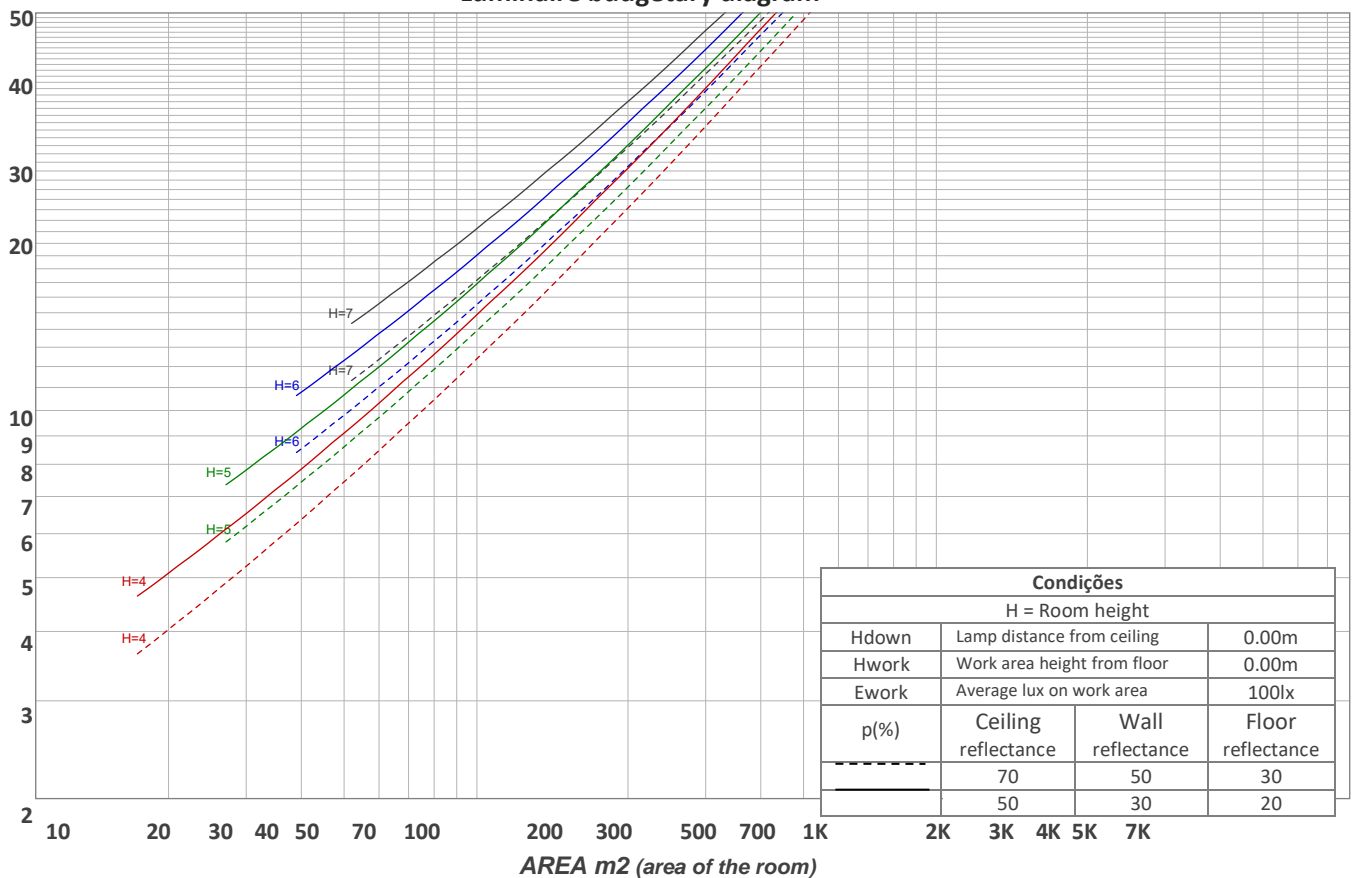

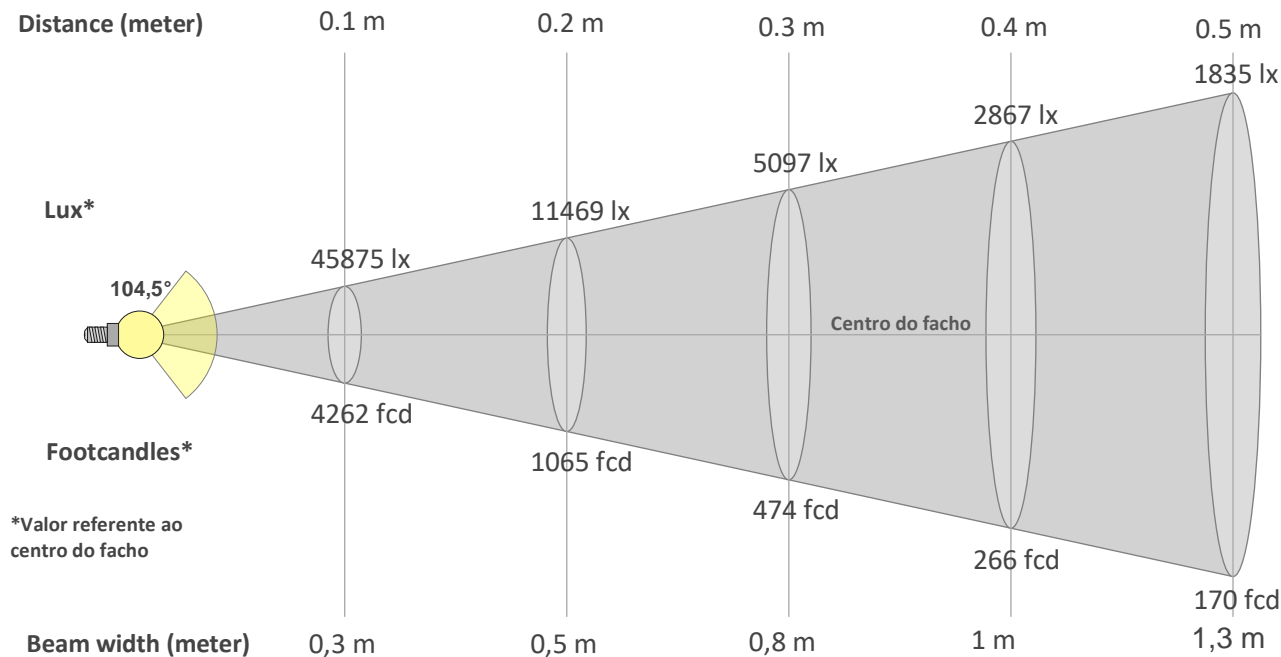

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
459lx	115lx	51lx	29lx	18lx	13lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx
42,6fcd	10,7fcd	4,7fcd	2,7fcd	1,7fcd	1,2fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
459	456	446	431	411	387	357	324	288	250	209	165	124	87	56	35	20	6	1	0
100%	99%	97%	94%	90%	84%	78%	71%	63%	54%	45%	36%	27%	19%	12%	8%	4%	1%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
459	457	450	440	426	408	386	361	334	303	271	236	199	160	121	80	42	12	1	0
100%	100%	98%	96%	93%	89%	84%	79%	73%	66%	59%	51%	43%	35%	26%	17%	9%	3%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
459	456	446	431	411	387	357	324	288	250	209	165	124	87	56	35	20	6	1	0
100%	99%	97%	94%	90%	84%	78%	71%	63%	54%	45%	36%	27%	19%	12%	8%	4%	1%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
459	457	450	440	426	408	386	361	334	303	271	236	199	160	121	80	42	12	1	0
100%	100%	98%	96%	93%	89%	84%	79%	73%	66%	59%	51%	43%	35%	26%	17%	9%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
104,5°	152,3°	168,3°	83,2%	58,6%

iso-candela diagram

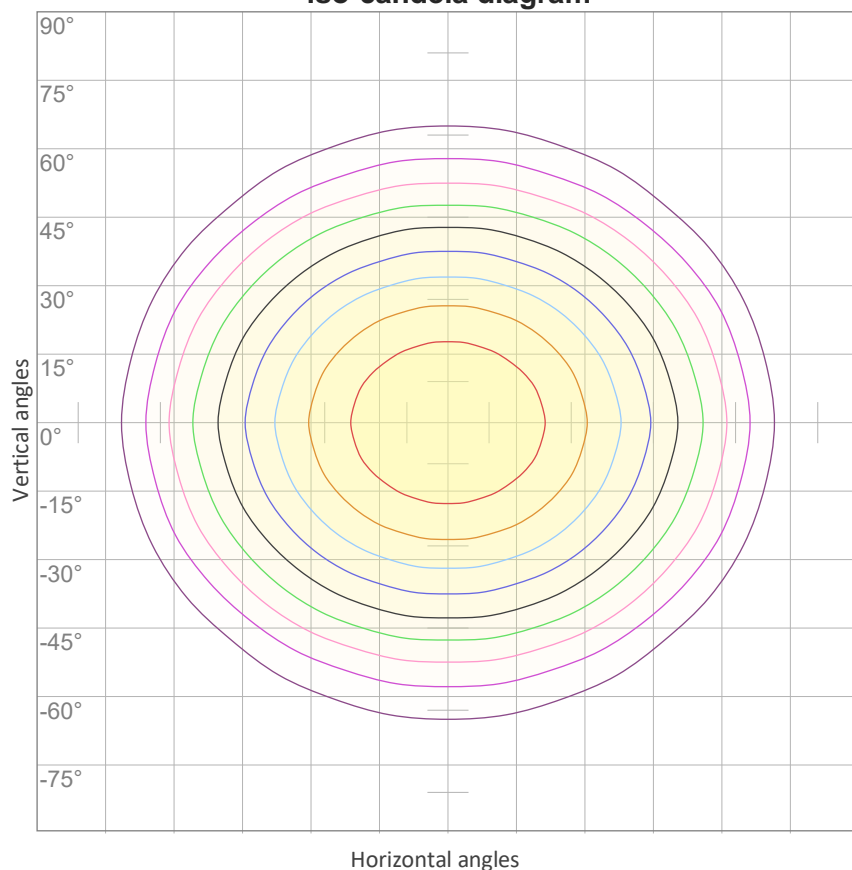


10%	46 cd
20%	92 cd
30%	138 cd
40%	183 cd
50%	229 cd
60%	275 cd
70%	321 cd
80%	367 cd
90%	413 cd

Conditions:

Number of c-planes: 16

Candela at center: 459 cd

iso-lux diagram

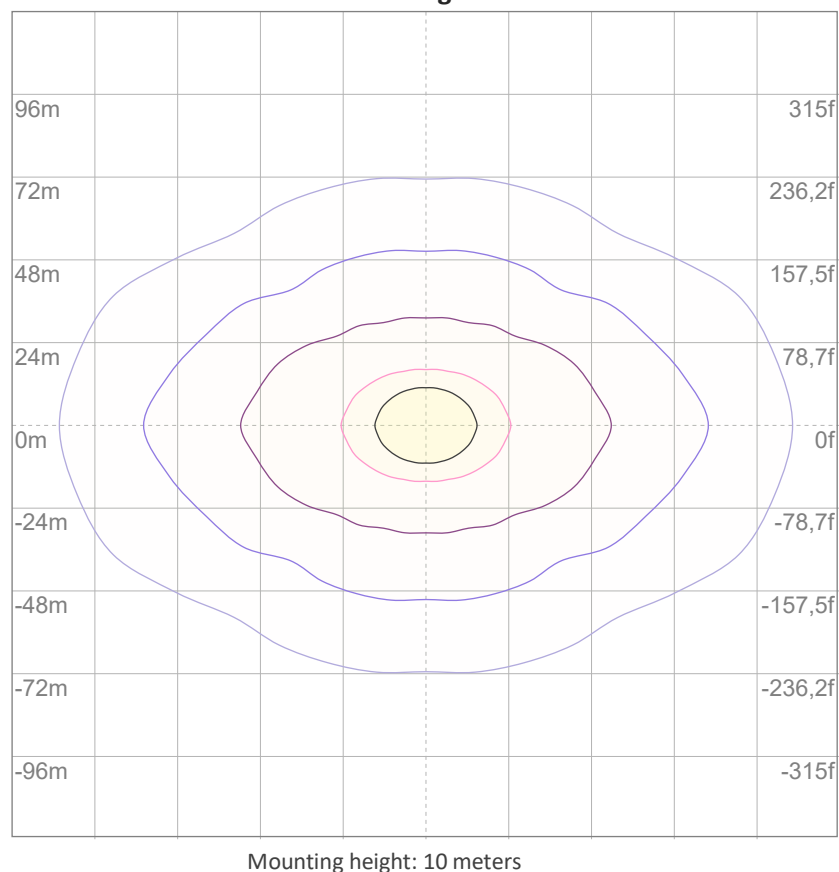

3%	0,138 lx
5%	0,229 lx
10%	0,459 lx
30%	1,38 lx
50%	2,29 lx

Conditions:

Number of c-planes: 16

Lux at center: 4,59 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência



Vttagem: 12,0 V

Corrente: 1,61 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a