

SLED9122SF LUMINARIA LINEAR DE SOBREPOR 2x2 20W/m 4000K 95 1M



Fluxo luminoso – 1008 lm/m

Potência – 21,0 W/m

Intensidade pico – 347cd

CCT – 4065K




IRC – 98,2

Coordenada CIE 1931 – x- 0,378 y- 0,376

Data do ensaio

28/08/2024 12:09:17

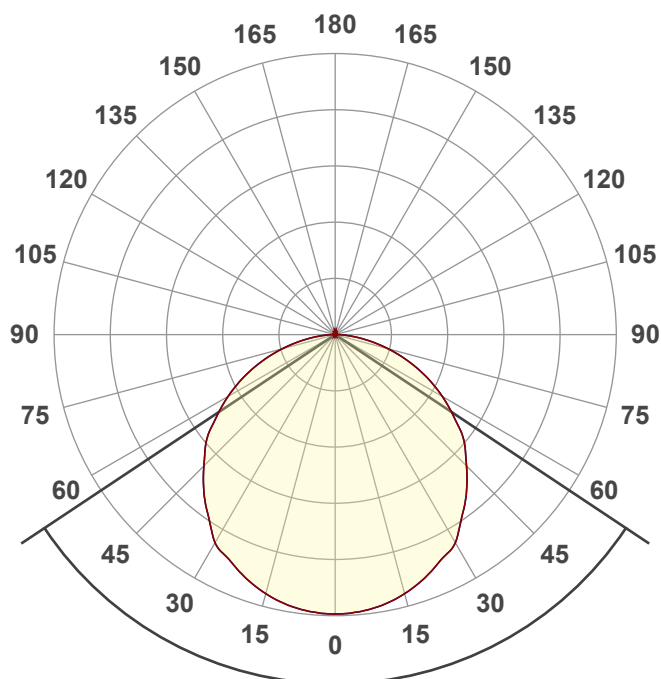

Facho de abertura

112,7°


Rf 94,3



Fidelity index Rf

Rg 100,2


Gamut index Rg

		Shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	96	-1%	0%
2	98	0%	0%
3	97	0%	1%
4	96	-2%	-1%
5	94	-4%	0%
6	98	0%	1%
7	96	-1%	2%
8	96	-1%	3%
9	93	0%	5%
10	93	0%	5%
11	90	3%	6%
12	92	3%	2%
13	94	3%	-2%
14	96	1%	-1%
15	91	2%	-5%
16	91	1%	-6%

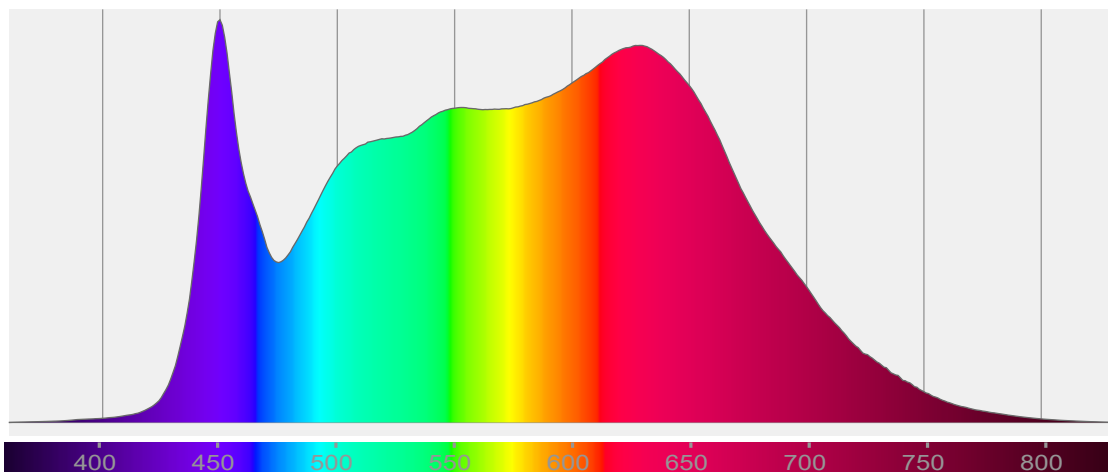


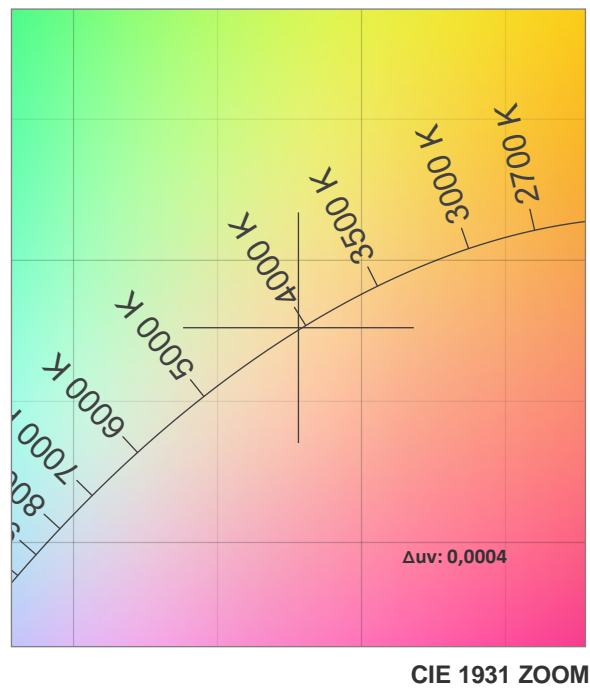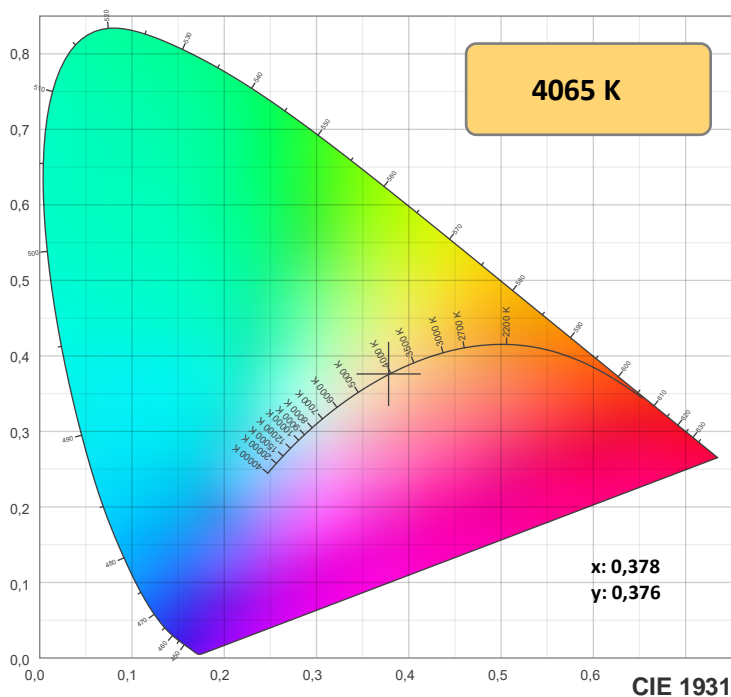

TM-30: 94,3

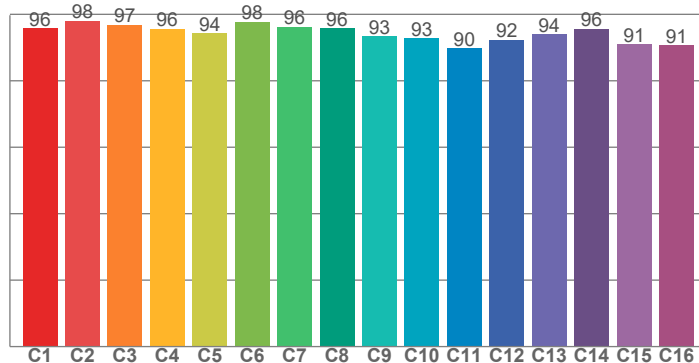

CRI: 98,2 (R1-R8)

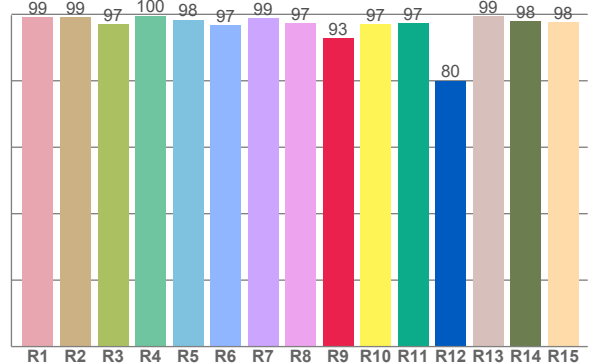

CRIRA R1-R8 / CRIRE R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99,0	99,2	97,0	99,5	98,4	96,7	98,7	97,3	92,8	97,0	97,4	80,0	99,4	97,9	97,6

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95,8	98,0	96,8	95,6	94,3	97,7	96,3	95,8	93,3	92,8	89,8	92,3	94,0	95,7	90,9	90,6

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4065 K	98,2	92,8	94,3	100,2	96,7	0,378	0,376	0,224	0,334	0,0004







Rf 94,3

Fidelity index Rf

Rg 100,2

Gamut index Rg

Hue Bin	R _i	Shifts (%)	
		Chroma	Hue
1	96	-1%	0%
2	98	0%	0%
3	97	0%	1%
4	96	-2%	-1%
5	94	-4%	0%
6	98	0%	1%
7	96	-1%	2%
8	96	-1%	3%
9	93	0%	5%
10	93	0%	5%
11	90	3%	6%
12	92	3%	2%
13	94	3%	-2%
14	96	1%	-1%
15	91	2%	-5%
16	91	1%	-6%

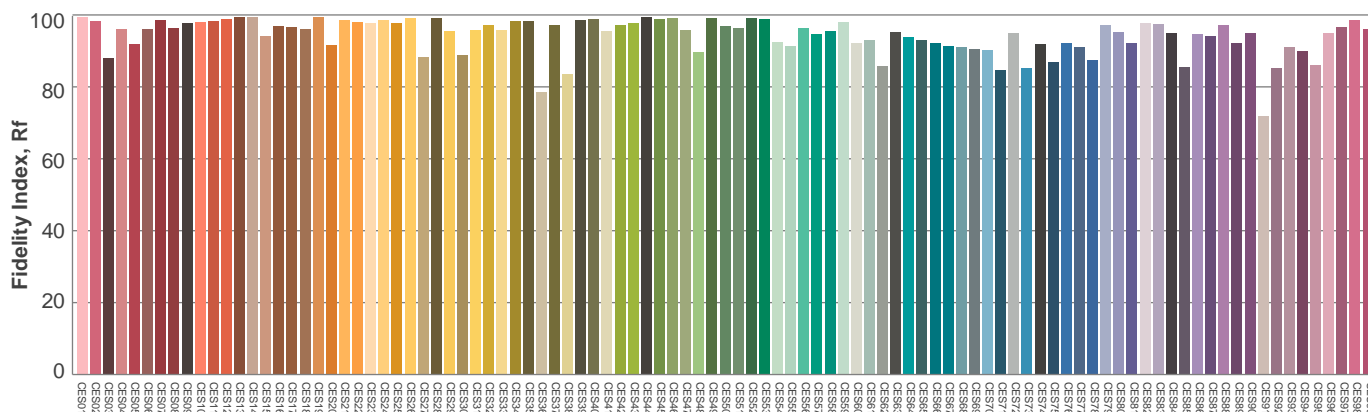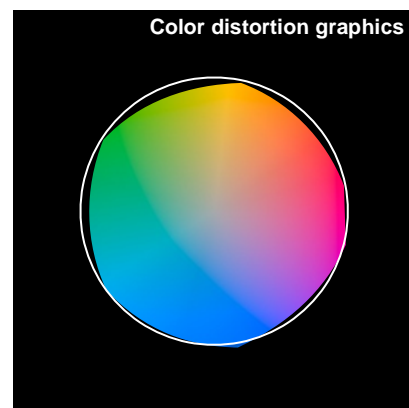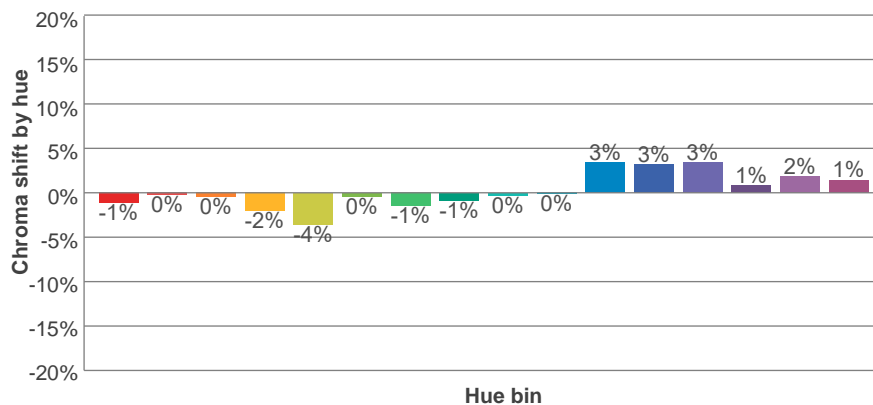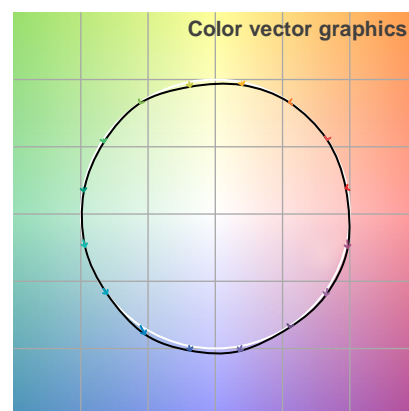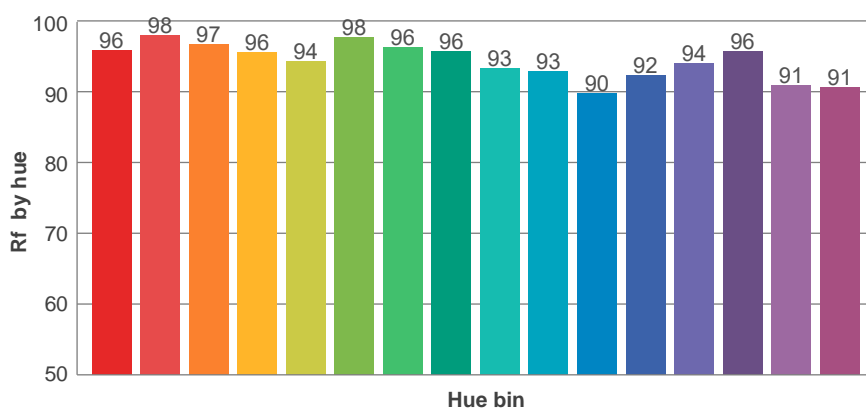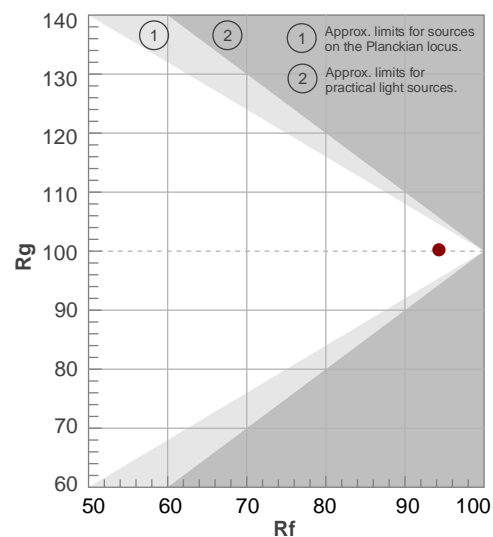

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	22,2	23,4	22,4	23,7	24,0	22,2	23,4	22,4	23,7	24,0
	3H	23,7	25,0	24,1	25,2	25,5	23,7	25,0	24,1	25,2	25,5
	4H	24,3	25,5	24,8	25,8	26,1	24,3	25,5	24,8	25,8	26,1
	6H	24,9	25,9	25,2	26,2	26,6	24,9	25,9	25,2	26,2	26,6
	8H	25,0	26,0	25,4	26,4	26,8	25,0	26,0	25,4	26,4	26,8
	12H	25,1	26,1	25,5	26,4	26,9	25,1	26,1	25,5	26,4	26,9
4H	2H	22,8	24,0	23,2	24,3	24,6	22,8	24,0	23,2	24,3	24,6
	3H	24,6	25,6	25,0	26,0	26,4	24,6	25,6	25,0	26,0	26,4
	4H	25,3	26,2	25,8	26,7	27,2	25,3	26,2	25,8	26,7	27,2
	6H	25,9	26,8	26,4	27,2	27,5	25,9	26,8	26,4	27,2	27,5
	8H	26,1	26,9	26,6	27,3	27,7	26,1	26,9	26,6	27,3	27,7
	12H	26,2	26,9	26,7	27,3	27,8	26,2	26,9	26,7	27,3	27,8
8H	4H	25,6	26,4	26,1	26,8	27,2	25,6	26,4	26,1	26,8	27,2
	6H	26,4	27,0	26,9	27,5	28,0	26,4	27,0	26,9	27,5	28,0
	8H	26,7	27,2	27,2	27,7	28,4	26,7	27,2	27,2	27,7	28,4
	12H	26,9	27,3	27,5	27,8	28,5	26,9	27,3	27,5	27,8	28,5
12H	4H	25,6	26,3	26,1	26,7	27,2	25,6	26,3	26,1	26,7	27,2
	6H	26,4	27,0	27,0	27,5	28,2	26,4	27,0	27,0	27,5	28,2
	8H	26,8	27,2	27,4	27,7	28,4	26,8	27,2	27,4	27,7	28,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,2				
S = 2.0H		0,4 / -0,5					0,4 / -0,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1008 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83
2	98	90	83	77	96	88	82	76	84	79	74	81	77	73	78	74	71	69
3	90	79	71	64	87	77	70	64	74	68	62	71	66	61	69	64	60	58
4	82	70	61	54	80	69	60	54	66	59	53	63	57	52	61	56	51	49
5	75	62	53	47	73	61	53	46	59	52	46	57	50	45	55	49	45	42
6	70	56	47	41	68	55	47	40	53	46	40	52	45	40	50	44	39	37
7	64	51	42	36	63	50	42	36	48	41	35	47	40	35	45	39	35	33
8	60	46	38	32	58	46	37	32	44	37	32	43	36	31	42	36	31	29
9	56	43	34	29	55	42	34	29	41	33	28	40	33	28	39	32	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	25	24

Quantidade de luminárias

Luminaire budgetary diagram

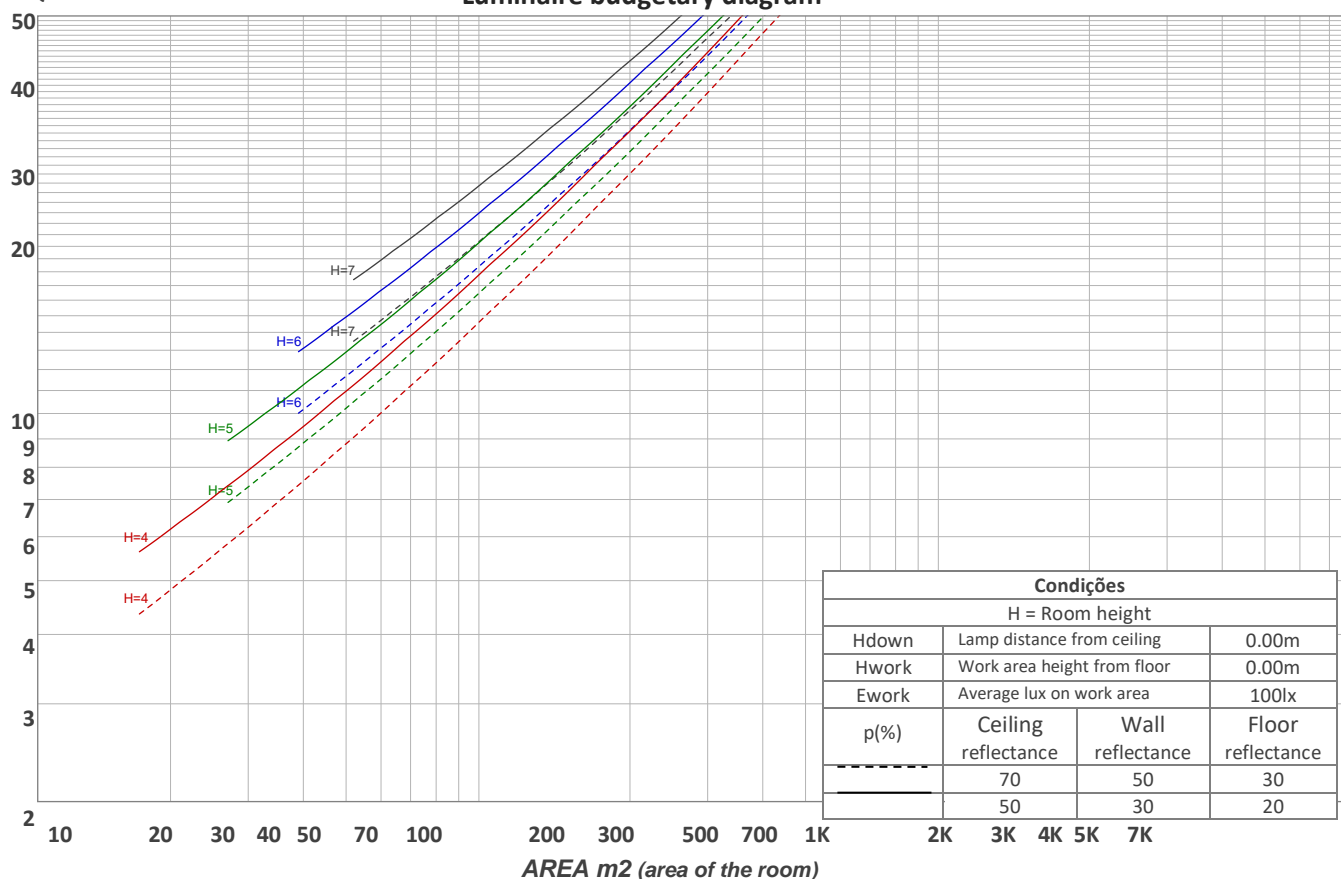

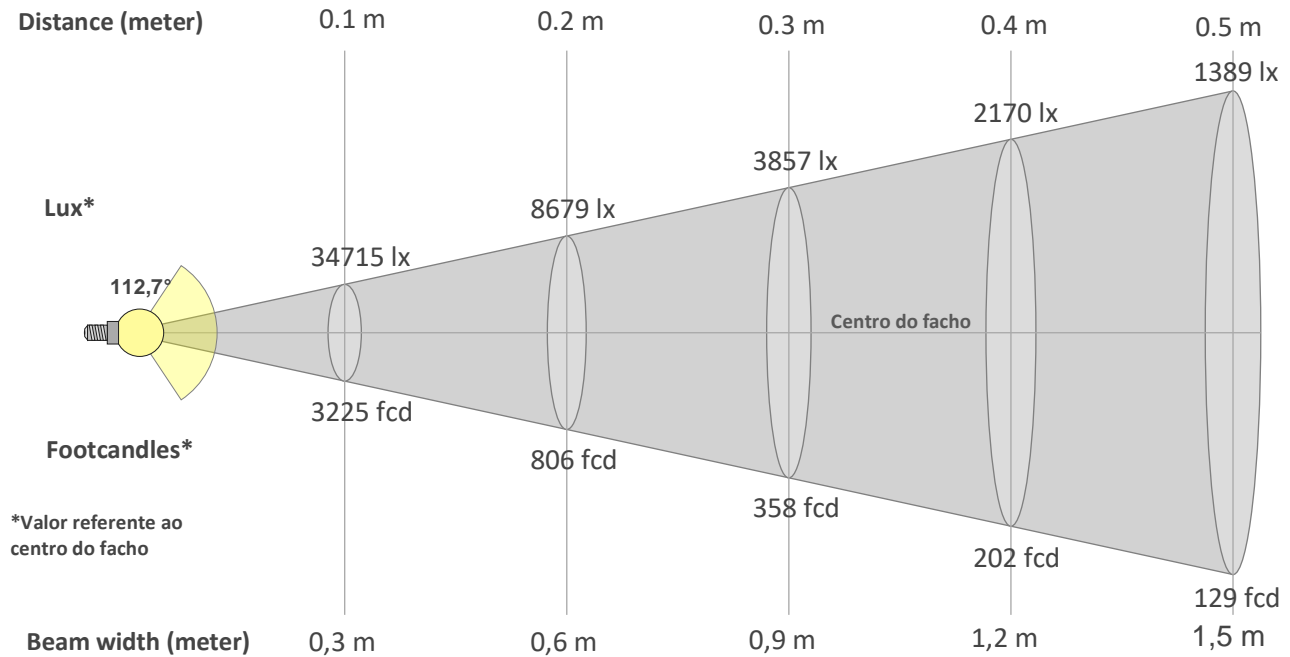

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
347lx	87lx	39lx	22lx	14lx	10lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
32,3fcd	8,1fcd	3,6fcd	2fcd	1,3fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
347	346	341	333	323	310	298	275	254	231	210	181	154	126	97	68	41	18	5	3
100%	100%	98%	96%	93%	89%	86%	79%	73%	66%	60%	52%	44%	36%	28%	20%	12%	5%	1%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
347	346	341	333	323	310	298	275	254	231	210	181	154	126	97	68	41	18	5	3
100%	100%	98%	96%	93%	89%	86%	79%	73%	66%	60%	52%	44%	36%	28%	20%	12%	5%	1%	1%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
347	346	341	333	323	310	298	275	254	231	210	181	154	126	97	68	41	18	5	3
100%	100%	98%	96%	93%	89%	86%	79%	73%	66%	60%	52%	44%	36%	28%	20%	12%	5%	1%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
347	346	341	333	323	310	298	275	254	231	210	181	154	126	97	68	41	18	5	3
100%	100%	98%	96%	93%	89%	86%	79%	73%	66%	60%	52%	44%	36%	28%	20%	12%	5%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,7°	162,5°	175,5°	77,8%	52,8%

iso-candela diagram

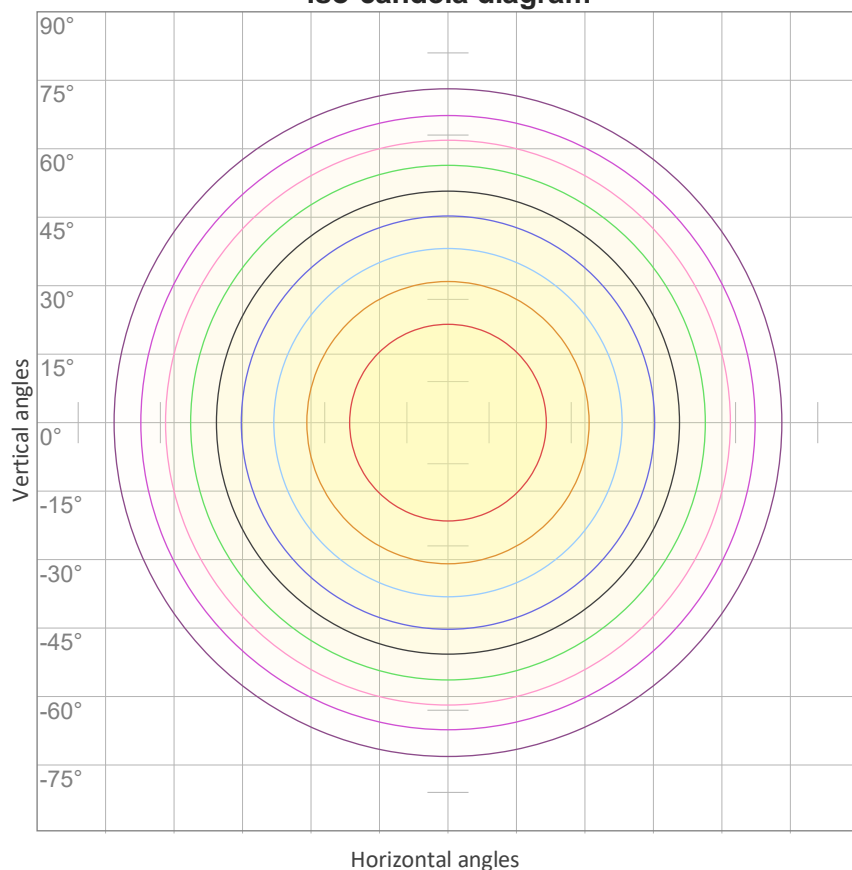


10%	35 cd
20%	69 cd
30%	104 cd
40%	139 cd
50%	174 cd
60%	208 cd
70%	243 cd
80%	278 cd
90%	312 cd

Conditions:

Number of c-planes: 16

Candela at center: 347 cd

iso-lux diagram

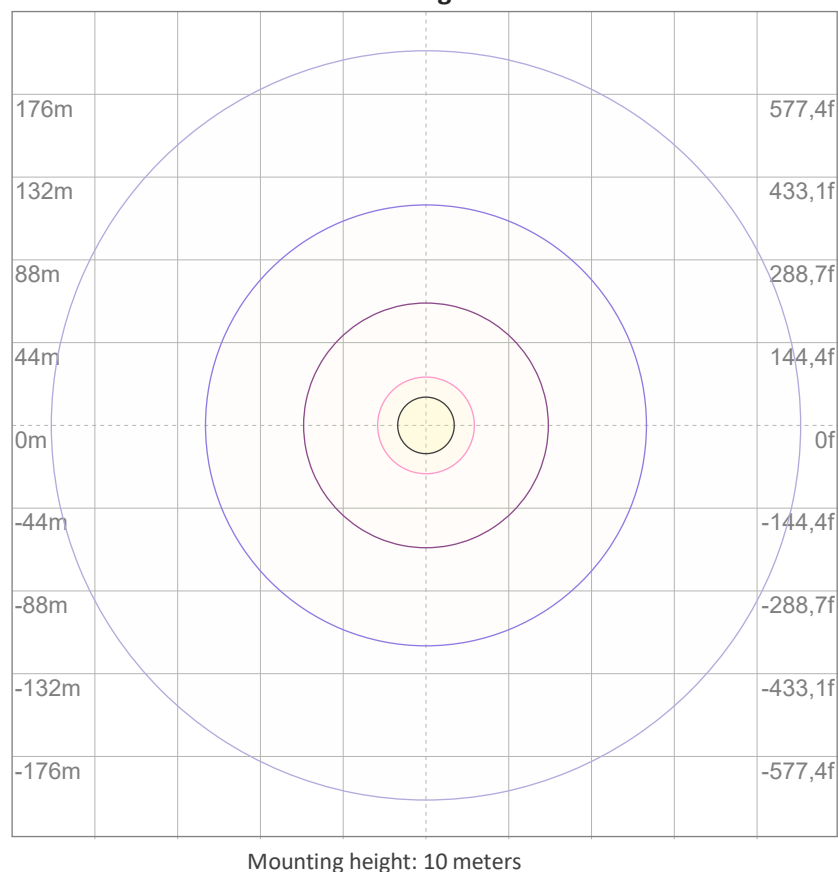

3%	0,104 lx
5%	0,174 lx
10%	0,347 lx
30%	1,04 lx
50%	1,74 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,47 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência



Vttagem: 12,0 V

Corrente: 1,75 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a