

9003 SLED9003U BRANCA FITA 19WM 4000K 80 - 1m



Luminária linear de sobrepor em forro de gesso ou Dry-wall com iluminação difusa. Corpo em alumínio extrudado com acabamento na cor branca. Difusor em acrílico extrudado leitoso. Indicado para residência, recepção, escritório etc.

Fluxo luminoso – 1516 lm/m

Potência – 19,7 W/m

Intensidade pico – 335cd

CCT – 3934K



IRC – 82,3

Coordenada CIE 1931 – x- 0,384 y- 0,380

A x L - 21x24

Peso - 0,18kg/m


IP - 20 - Uso Interno

IK - 00 – Não aplicável

Alimentação - 12vdc

Data do ensaio

07/03/2022 07:56:14

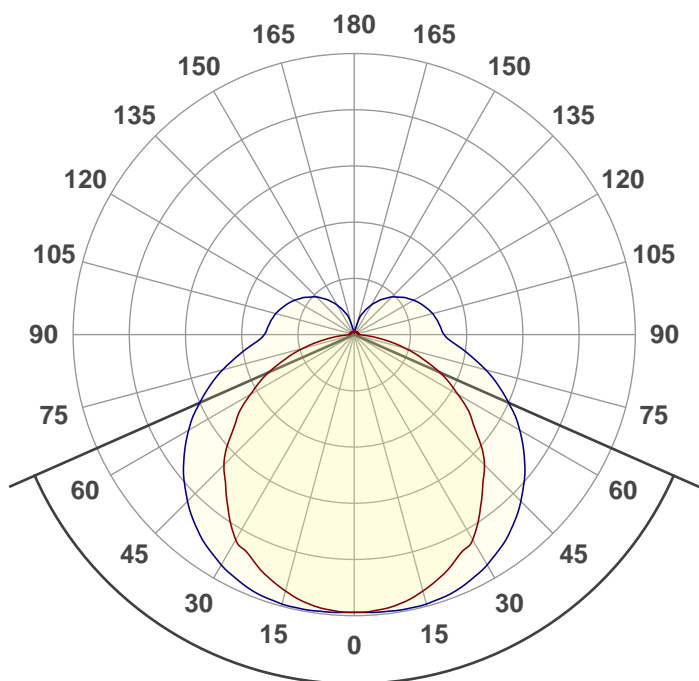

Facho de abertura

132,4°


Rf 83,8



Fidelity index Rf

Rg 96,7

Gamut index Rg



Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	80	-12%	-1%
2	83	-8%	6%
3	76	-4%	12%
4	86	1%	9%
5	89	3%	5%
6	93	4%	-2%
7	92	-2%	-5%
8	90	-5%	-3%
9	88	-7%	3%
10	78	-8%	10%
11	78	1%	15%
12	81	5%	9%
13	86	8%	-5%
14	87	9%	-6%
15	80	0%	-14%
16	78	-5%	-13%

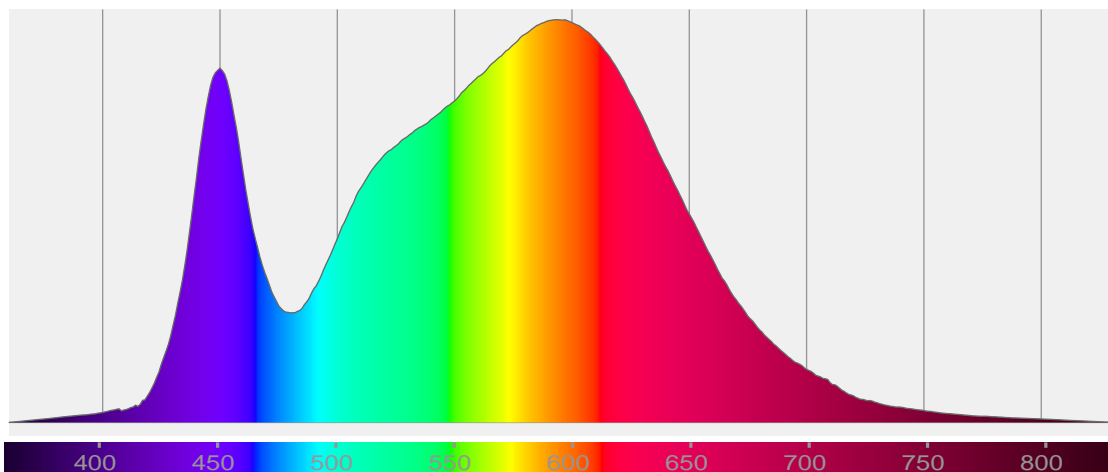

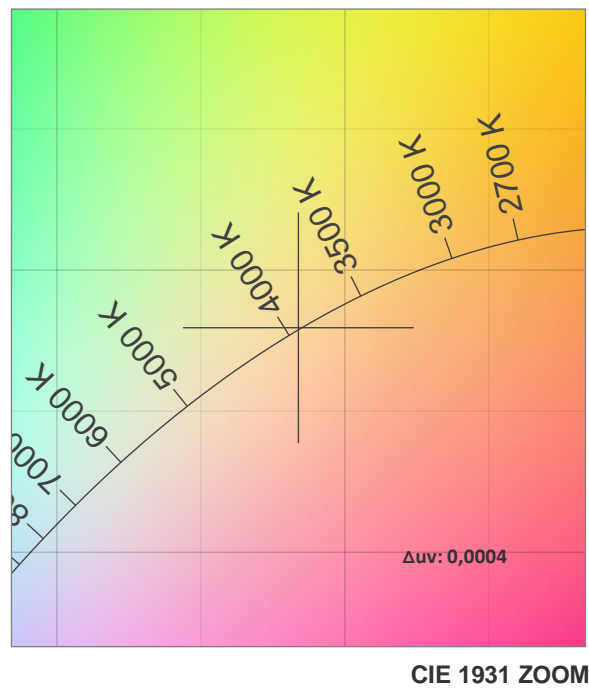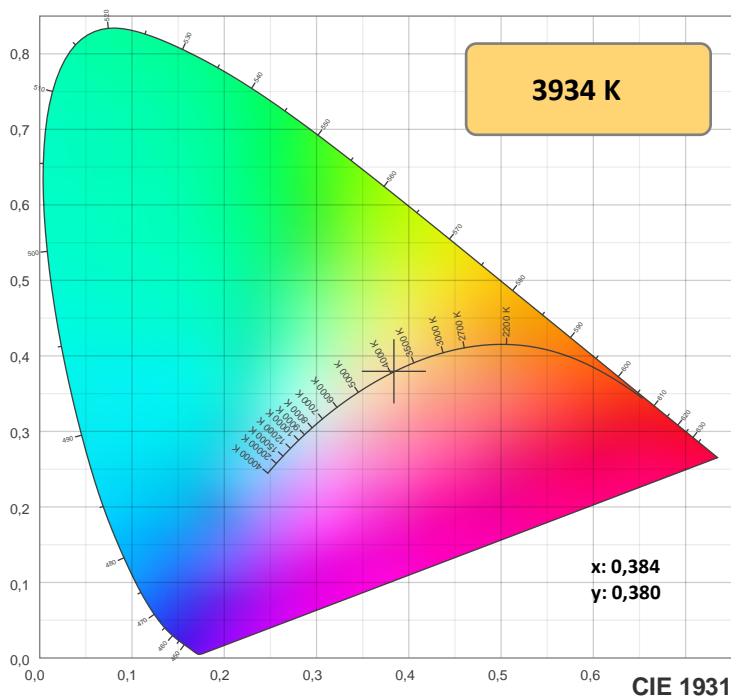

TM-30: 83,8

CRI: 82,3 (R1-R8)

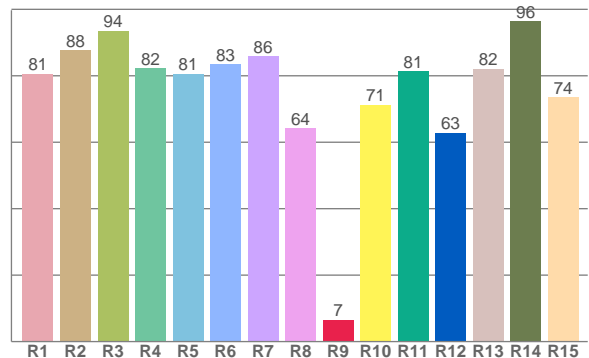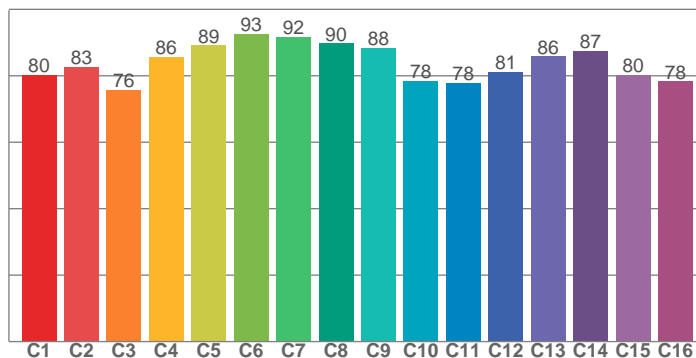

CRlra R1-R8 / CRlre R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,6	87,8	93,6	82,2	80,7	83,5	85,9	64,3	6,6	71,3	81,3	62,8	82,2	96,4	73,6

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80,3	82,7	75,8	85,6	89,1	92,6	91,7	89,8	88,4	78,4	77,8	81,1	85,8	87,4	80,2	78,4

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3934 K	82,3	6,6	83,8	96,7	81,8	0,384	0,380	0,226	0,336	0,0004







Rf 83,8

Fidelity index Rf

Rg 96,7

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	80	-12%	-1%
2	83	-8%	6%
3	76	-4%	12%
4	86	1%	9%
5	89	3%	5%
6	93	4%	-2%
7	92	-2%	-5%
8	90	-5%	-3%
9	88	-7%	3%
10	78	-8%	10%
11	78	1%	15%
12	81	5%	9%
13	86	8%	-5%
14	87	9%	-6%
15	80	0%	-14%
16	78	-5%	-13%

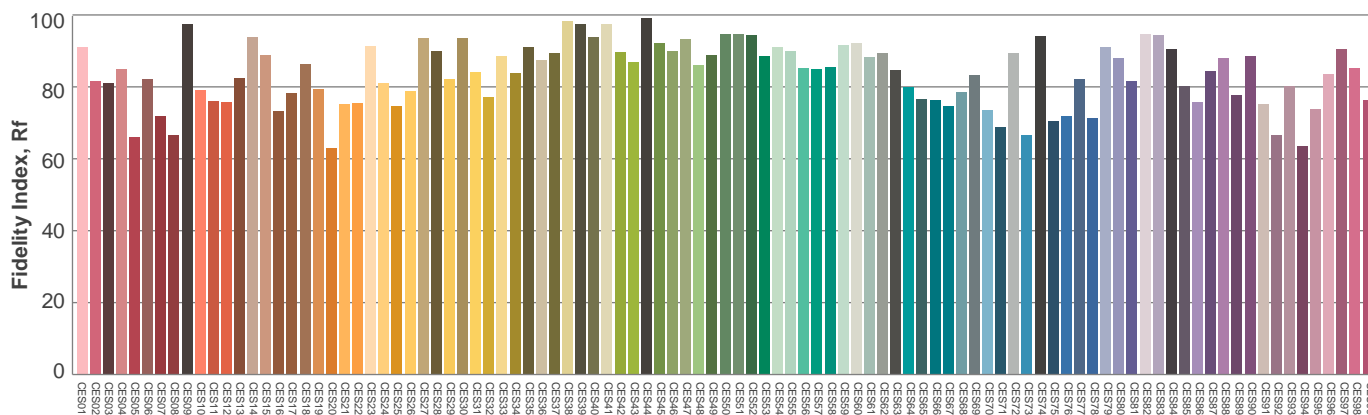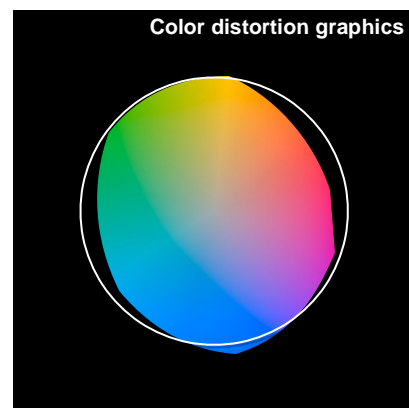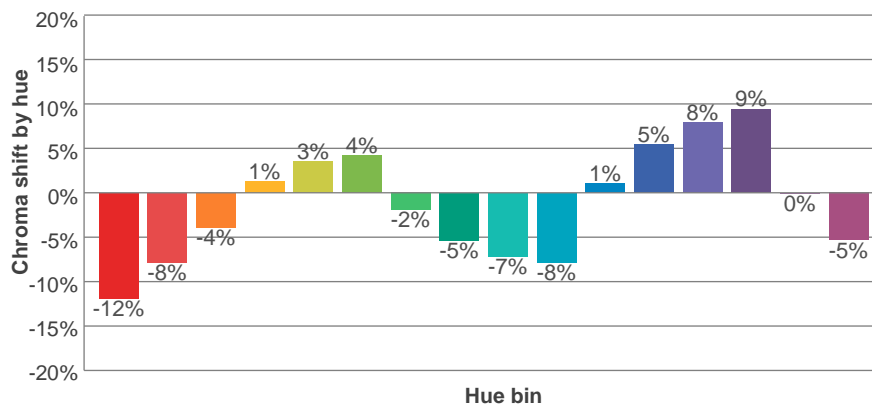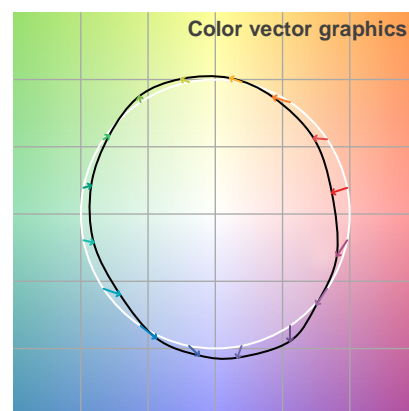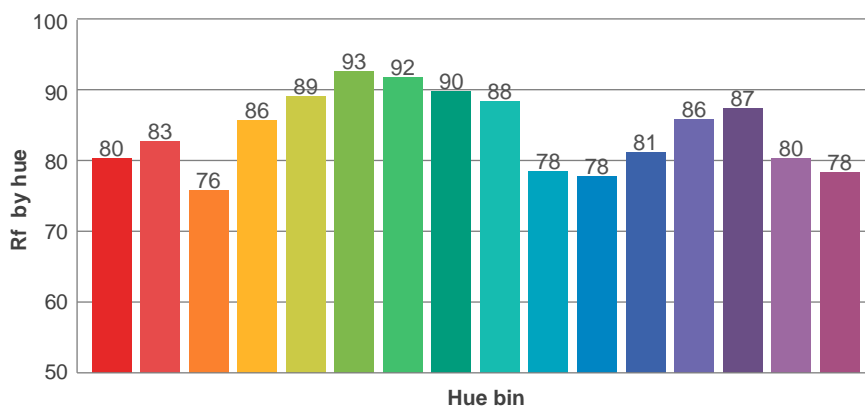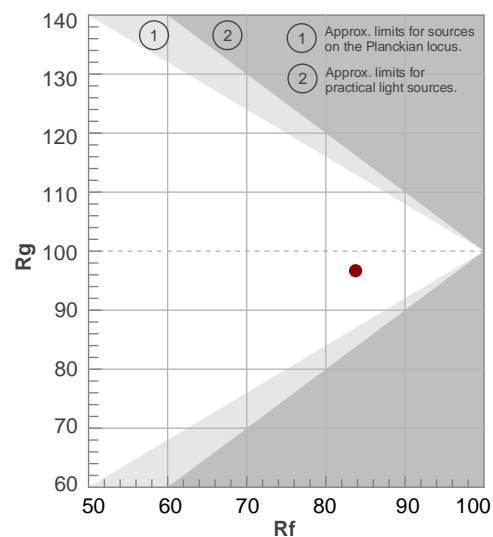

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	18,8	20,0	19,4	20,5	21,1	21,5	22,7	22,1	23,2	23,9
	3H	20,0	21,1	20,7	21,7	22,3	23,9	25,0	24,5	25,6	26,2
	4H	20,4	21,5	21,1	22,1	22,7	25,1	26,2	25,8	26,8	27,4
	6H	20,7	21,7	21,3	22,3	23,0	26,5	27,4	27,1	28,0	28,7
	8H	20,8	21,7	21,4	22,3	23,1	27,2	28,1	27,8	28,7	29,5
	12H	20,8	21,8	21,4	22,3	23,1	28,0	29,0	28,6	29,5	30,3
4H	2H	19,9	20,9	20,5	21,5	22,1	21,9	23,0	22,6	23,6	24,2
	3H	21,4	22,3	22,0	22,9	23,6	24,5	25,5	25,1	26,1	26,8
	4H	21,9	22,9	22,5	23,4	24,2	25,9	26,9	26,5	27,4	28,2
	6H	22,2	23,0	23,0	23,7	24,4	27,3	28,2	28,1	28,8	29,5
	8H	22,3	23,0	23,1	23,7	24,4	28,2	28,9	28,9	29,5	30,2
	12H	22,4	23,0	23,1	23,7	24,5	29,1	29,7	29,8	30,4	31,1
8H	4H	22,6	23,3	23,4	24,0	24,7	26,0	26,7	26,7	27,4	28,1
	6H	23,3	23,8	24,0	24,5	25,4	27,7	28,3	28,4	29,0	29,8
	8H	23,5	23,9	24,2	24,7	25,6	28,7	29,1	29,4	29,9	30,8
	12H	23,6	24,0	24,4	24,8	25,6	29,7	30,2	30,5	30,9	31,8
12H	4H	22,8	23,4	23,5	24,1	24,9	26,0	26,6	26,7	27,3	28,1
	6H	23,6	24,1	24,3	24,9	25,8	27,7	28,2	28,5	29,0	29,9
	8H	23,9	24,3	24,7	25,1	25,9	28,7	29,2	29,5	29,9	30,8
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,3					0,2 / -0,2				
S = 2.0H		0,4 / -0,7					0,3 / -0,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1516 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	114	114	114	114	110	110	110	110	100	100	100	92	92	92	84	84	84	81
1	102	97	91	87	97	92	88	84	84	81	78	77	74	72	71	68	66	63
2	92	83	75	69	87	79	72	67	73	67	62	66	62	58	61	57	54	51
3	83	72	63	56	79	69	61	55	63	57	51	58	52	48	53	48	45	42
4	76	63	54	47	72	61	52	46	56	49	43	51	45	40	47	42	38	35
5	70	56	47	40	66	54	45	39	50	42	37	46	39	34	42	37	32	30
6	64	50	41	34	61	48	40	34	45	37	32	41	35	30	38	32	28	26
7	59	45	36	30	56	44	35	29	40	33	28	37	31	26	34	29	25	22
8	55	41	33	27	52	40	32	26	37	30	25	34	28	23	31	26	22	20
9	51	38	29	24	49	36	28	23	34	27	22	31	25	21	29	24	20	18
10	48	35	27	21	46	33	26	21	31	24	20	29	23	19	27	22	18	16

Quantidade de luminárias

Luminaire budgetary diagram

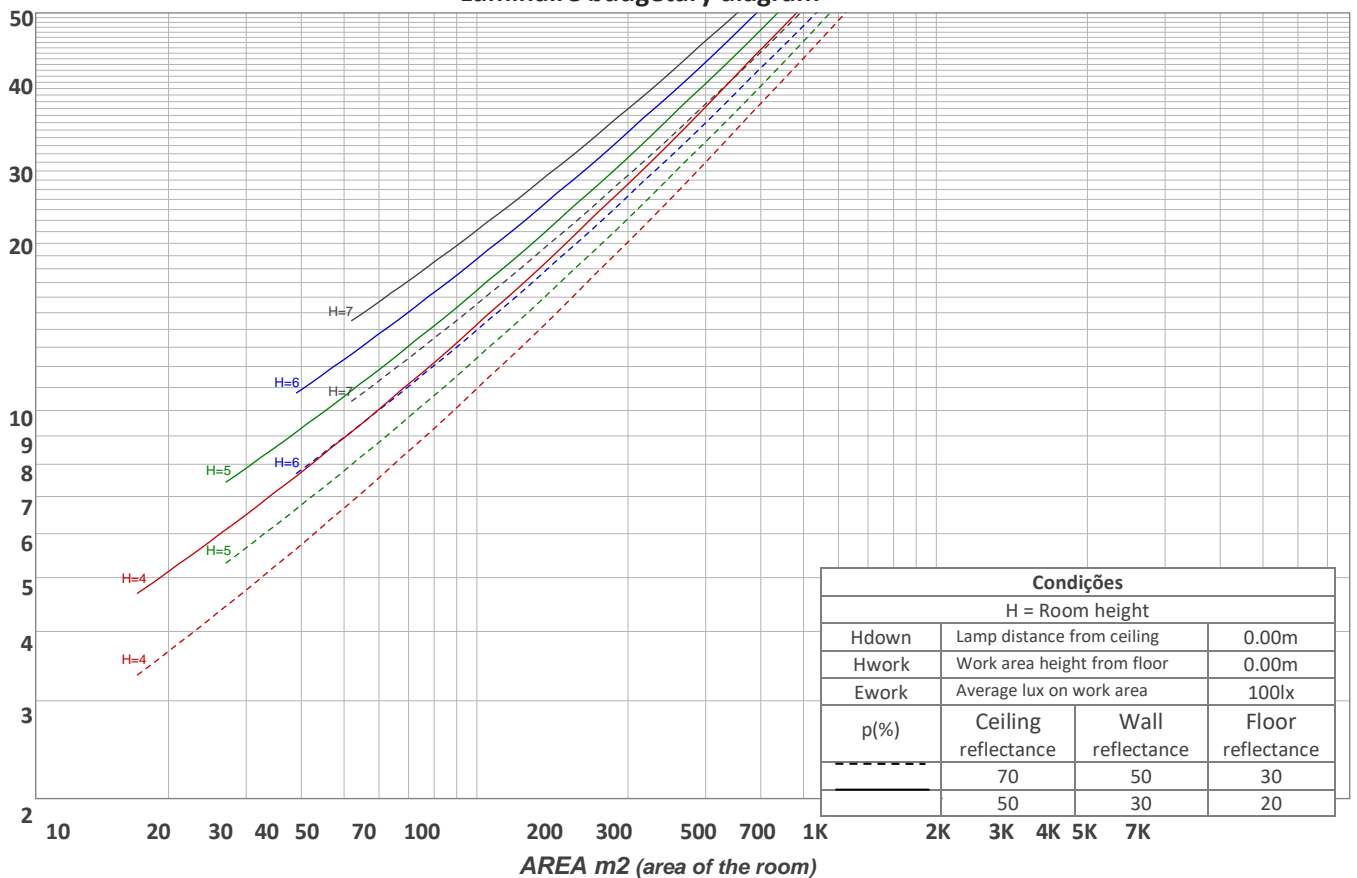

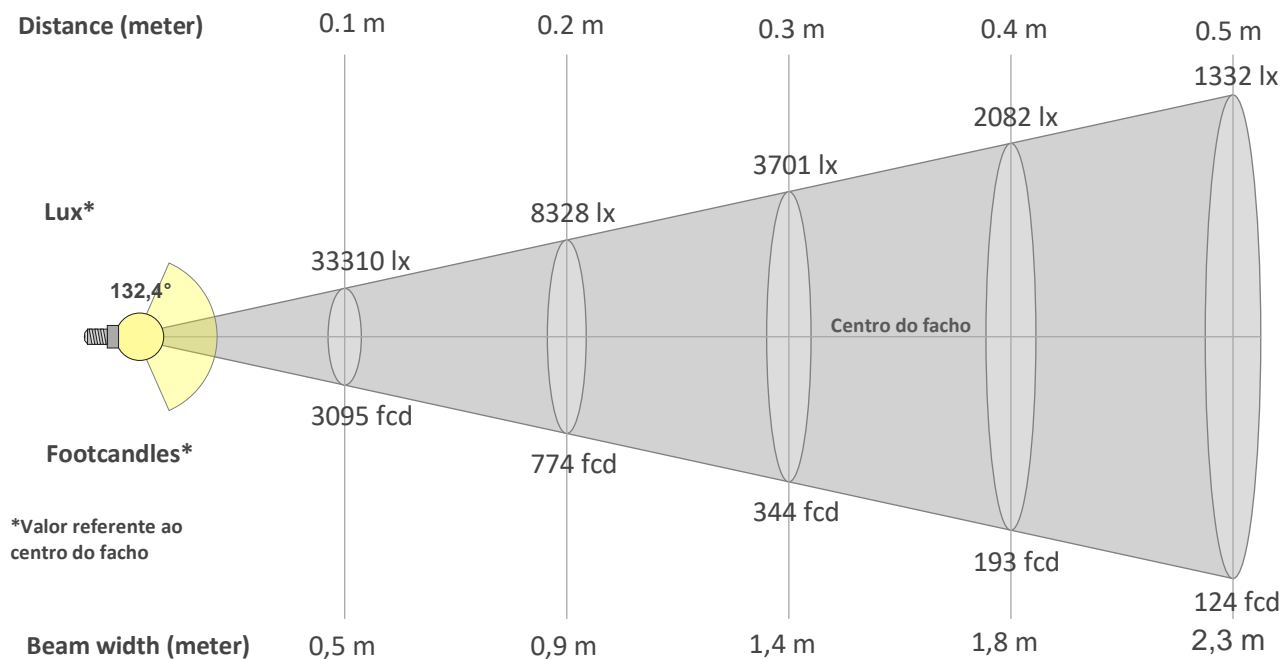

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
333lx	83lx	37lx	21lx	13lx	9lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
30,9fcd	7,7fcd	3,4fcd	1,9fcd	1,2fcd	0,9fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
333	328	312	290	257	221	175	129	80	33	5	5	5	4	4	4	4	4	4	3
100%	98%	94%	87%	77%	66%	52%	39%	24%	10%	2%	2%	2%	1%	1%	1%	1%	1%	1%	1%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
333	335	333	323	307	282	252	217	177	136	108	101	95	86	75	64	50	36	22	5
100%	100%	100%	97%	92%	85%	76%	65%	53%	41%	32%	30%	28%	26%	23%	19%	15%	11%	7%	2%

Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
333	328	312	290	257	221	175	129	80	33	5	5	5	4	4	4	4	4	4	3
100%	98%	94%	87%	77%	66%	52%	39%	24%	10%	2%	2%	2%	1%	1%	1%	1%	1%	1%	1%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
333	335	333	323	307	282	252	217	177	136	108	101	95	86	75	64	50	36	22	5
100%	100%	100%	97%	92%	85%	76%	65%	53%	41%	32%	30%	28%	26%	23%	19%	15%	11%	7%	2%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
132,4°	260,6°	307,5°	55,4%	36,1%

iso-candela diagram

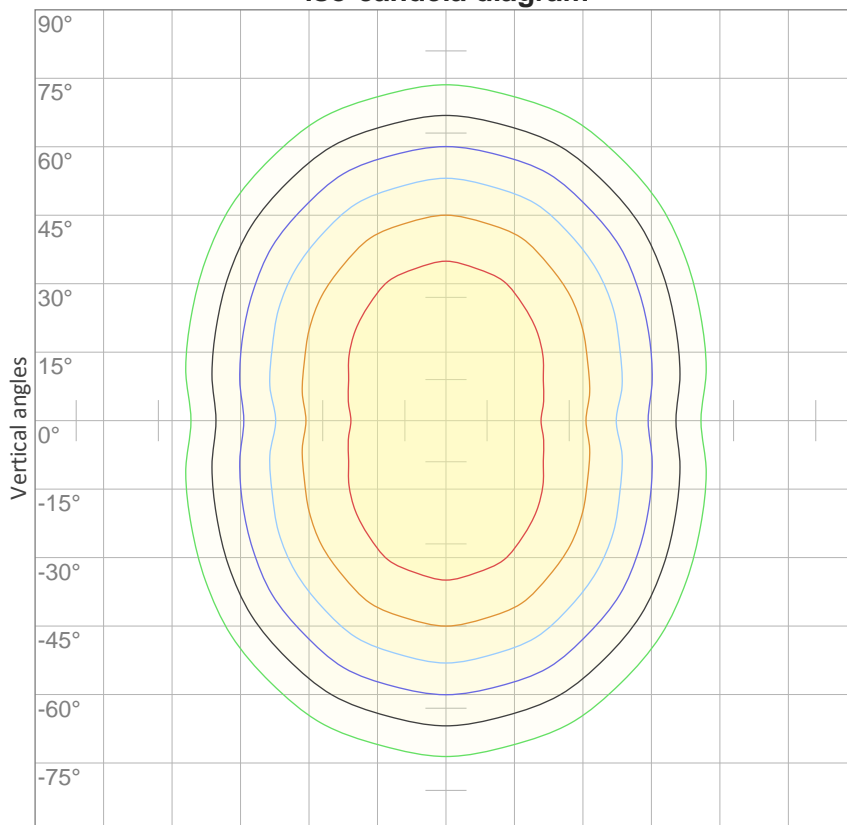


10%	33 cd
20%	67 cd
30%	100 cd
40%	133 cd
50%	167 cd
60%	200 cd
70%	233 cd
80%	266 cd
90%	300 cd

Conditions:

Number of c-planes: 16

Candela at center: 333 cd

iso-lux diagram

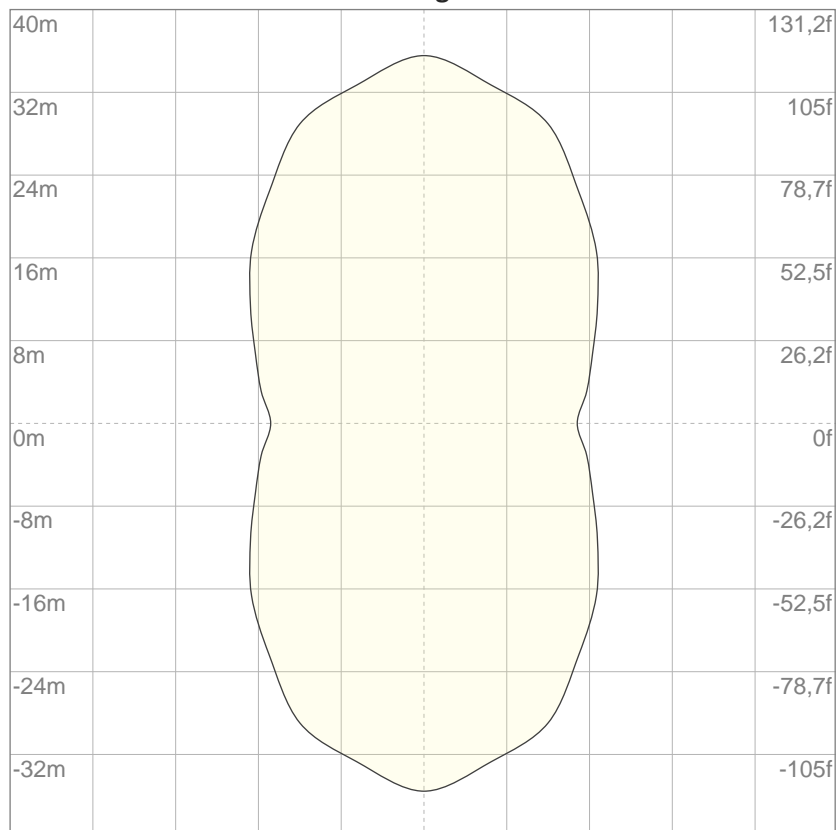

3%	99,9m lx
5%	0,167 lx
10%	0,333 lx
30%	0,999 lx
50%	1,67 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,33 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência

Vttagem: 12,0 V

Corrente: 1,64 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a