

## EX16 SLED9065 BRANCA FITA 9,6WM 4000K 80 - 1m



Luminária linear de sobrepor em mobiliário com iluminação difusa. Corpo em borracha com acabamento na cor branca. Difusor em borracha leitosa. Indicado para residência, mobiliário etc.

Fluxo luminoso – 464 lm/m

Potência – 9,6 W/m

Intensidade pico – 155cd

CCT – 3416K



IRC – 81,2

Coordenada CIE 1931 – x- 0,413 y- 0,399

A x L - 16x16

Peso - 0,26kg/m


IP - 20 - Uso Interno

IK - 00 – Não aplicável

Alimentação - 12vdc

Data do ensaio

05/02/2021 11:34:52

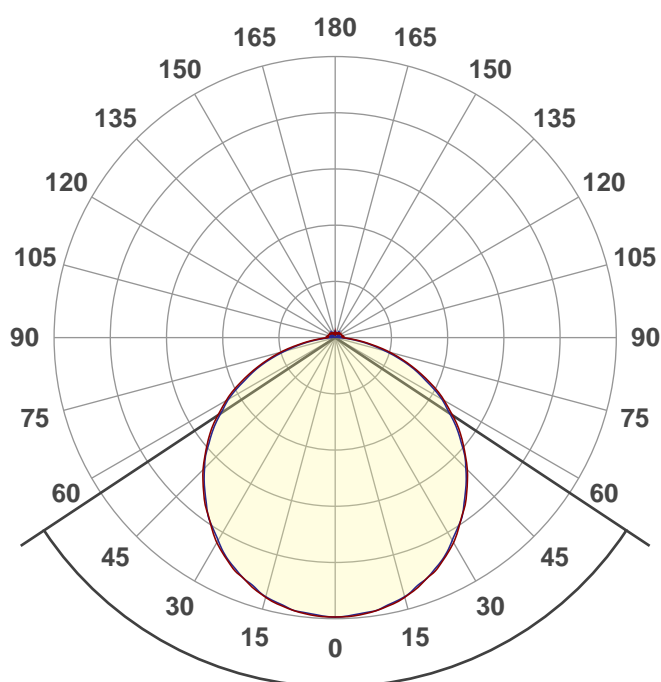

Facho de abertura

**113°**


**Rf 83,7**



Fidelity index Rf

**Rg 95,2**


Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	79	-12%	-1%
2	81	-9%	7%
3	77	-4%	12%
4	87	0%	8%
5	91	1%	4%
6	93	3%	-2%
7	89	-4%	-6%
8	91	-5%	-2%
9	87	-8%	4%
10	78	-7%	12%
11	76	0%	15%
12	86	7%	6%
13	90	5%	-4%
14	82	7%	-13%
15	79	-2%	-14%
16	78	-7%	-12%

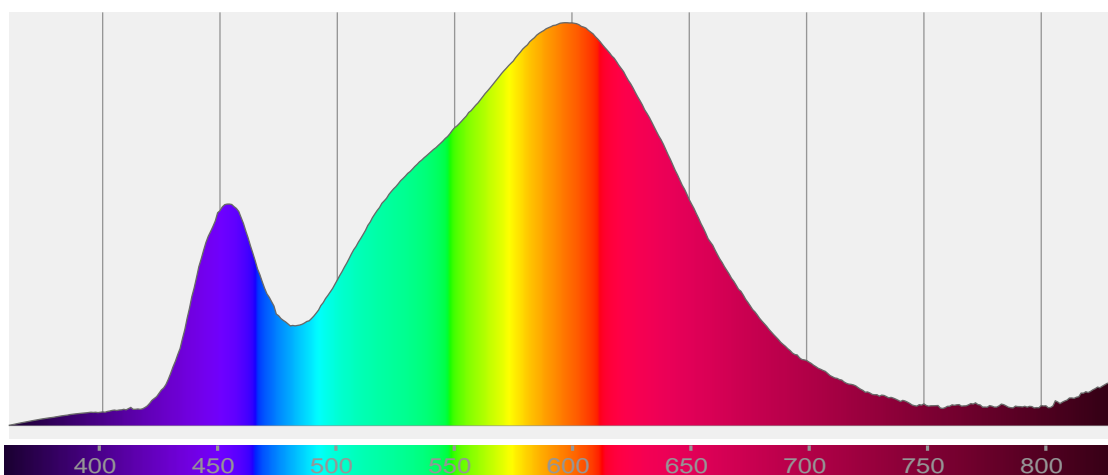


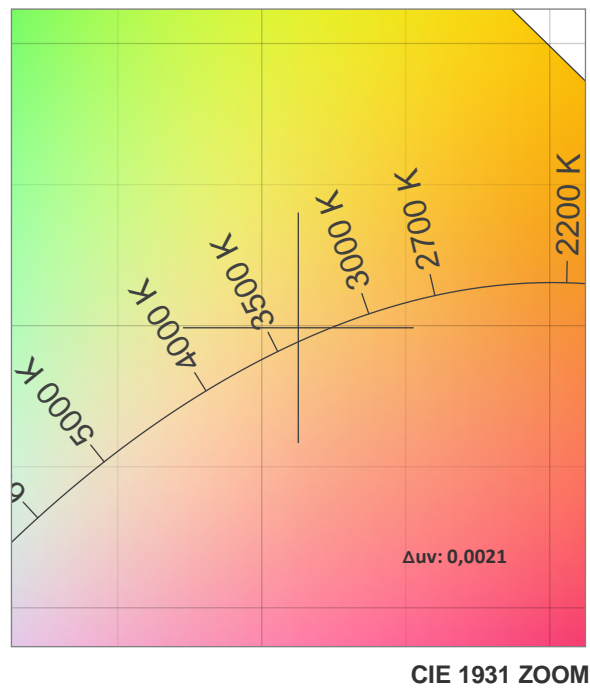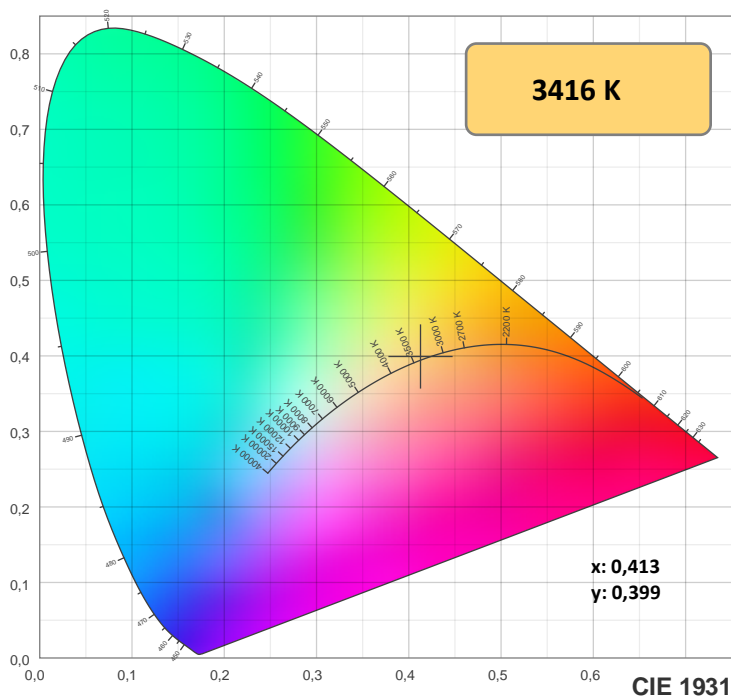

TM-30: 83,7

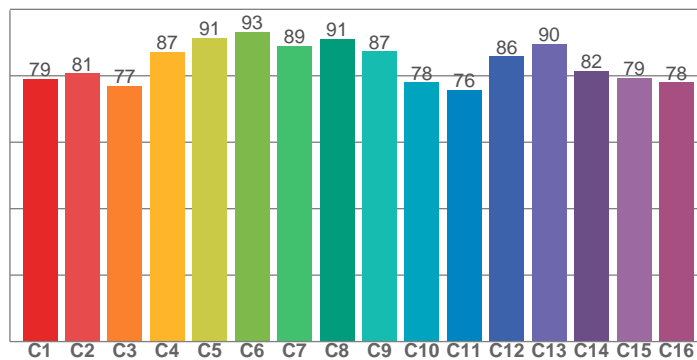

CRI: 81,2 (R1-R8)

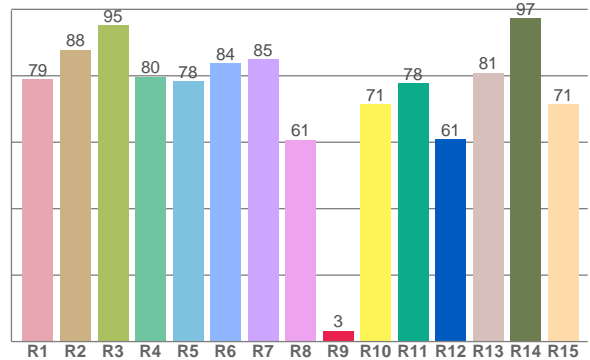

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
78,9	87,9	95,3	79,7	78,4	83,7	85,0	60,7	3,3	71,4	77,7	60,9	80,9	97,3	71,4

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,0	80,7	76,9	87,1	91,4	93,3	89,0	91,1	87,3	78,1	75,8	85,8	89,6	81,5	79,3	78,0

## Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3416 K	81,2	3,3	83,7	95,2	81,3	0,413	0,399	0,237	0,344	0,0021







**Rf 83,7**

Fidelity index Rf

**Rg 95,2**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	79	-12%	-1%
2	81	-9%	7%
3	77	-4%	12%
4	87	0%	8%
5	91	1%	4%
6	93	3%	-2%
7	89	-4%	-6%
8	91	-5%	-2%
9	87	-8%	4%
10	78	-7%	12%
11	76	0%	15%
12	86	7%	6%
13	90	5%	-4%
14	82	7%	-13%
15	79	-2%	-14%
16	78	-7%	-12%

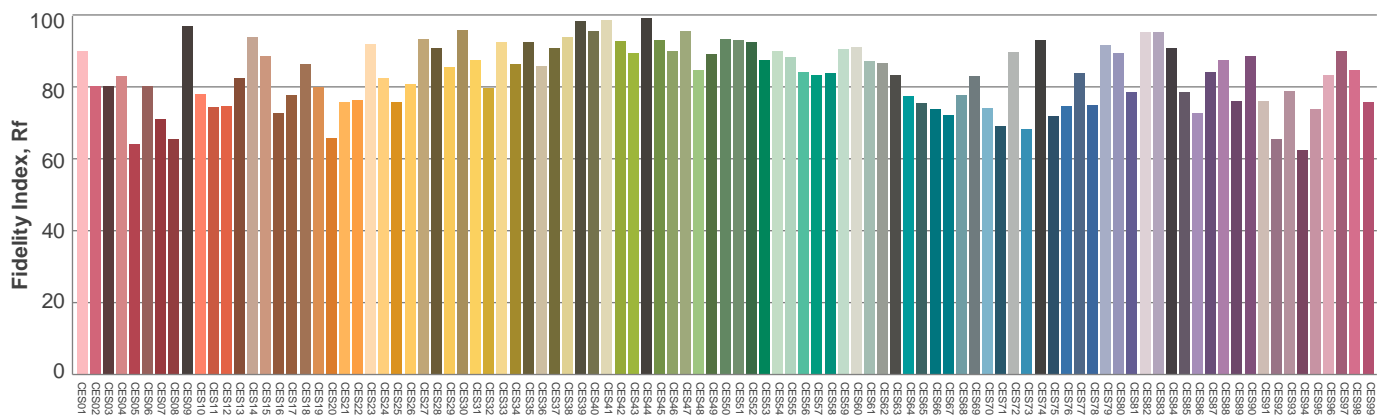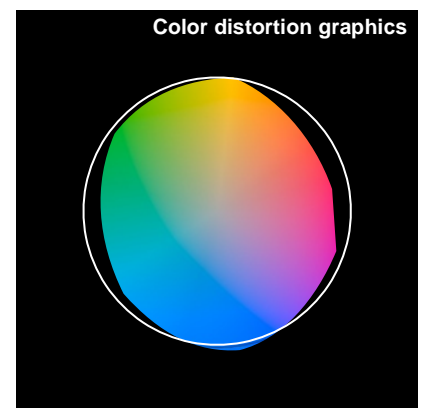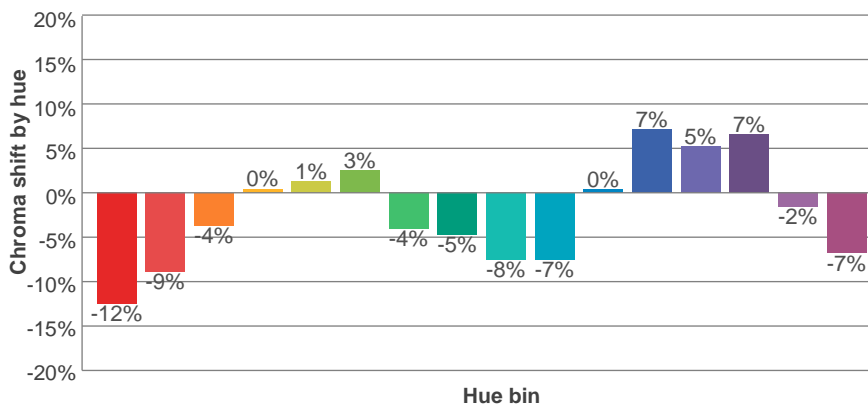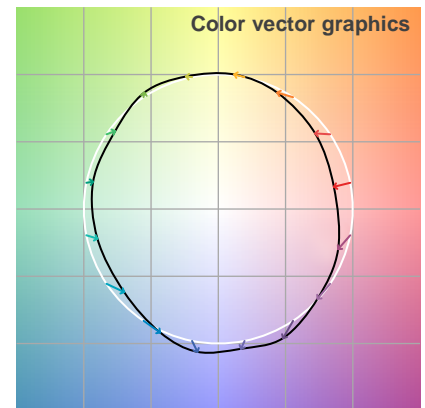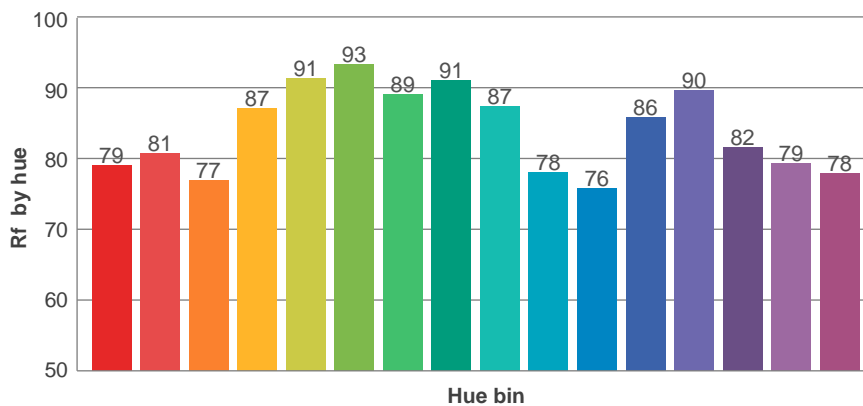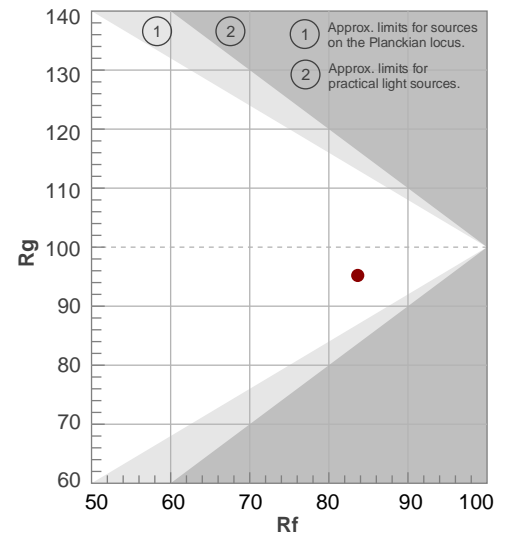

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	20,0	21,2	20,3	21,6	21,9	19,9	21,1	20,2	21,5	21,8
	3H	21,5	22,8	22,0	23,1	23,4	21,4	22,6	21,9	23,0	23,3
	4H	22,2	23,4	22,7	23,7	24,1	22,0	23,2	22,5	23,5	23,9
	6H	22,8	23,8	23,1	24,1	24,6	22,5	23,5	22,9	23,9	24,3
	8H	22,9	23,9	23,3	24,3	24,8	22,6	23,6	23,0	24,0	24,5
	12H	23,0	24,0	23,4	24,4	24,9	22,7	23,7	23,1	24,0	24,6
4H	2H	20,6	21,8	21,1	22,1	22,5	20,6	21,7	21,0	22,1	22,4
	3H	22,5	23,4	22,9	23,8	24,3	22,3	23,3	22,8	23,7	24,2
	4H	23,2	24,1	23,7	24,5	25,1	23,0	23,9	23,5	24,4	25,0
	6H	23,8	24,6	24,3	25,0	25,5	23,5	24,4	24,1	24,8	25,2
	8H	24,0	24,8	24,5	25,2	25,6	23,7	24,5	24,3	24,9	25,4
	12H	24,2	24,8	24,7	25,3	25,8	23,8	24,4	24,3	24,9	25,5
8H	4H	23,5	24,2	24,0	24,7	25,1	23,3	24,1	23,9	24,5	25,0
	6H	24,2	24,8	24,8	25,3	25,9	24,0	24,6	24,5	25,1	25,7
	8H	24,5	25,0	25,1	25,6	26,3	24,2	24,8	24,8	25,3	26,0
	12H	24,8	25,2	25,4	25,8	26,5	24,4	24,9	25,1	25,4	26,1
12H	4H	23,5	24,1	24,0	24,6	25,1	23,3	23,9	23,9	24,4	25,0
	6H	24,3	24,8	24,9	25,4	26,1	24,1	24,6	24,6	25,2	25,9
	8H	24,6	25,1	25,3	25,6	26,3	24,3	24,8	25,0	25,3	26,0
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,2				
S = 2.0H		0,4 / -0,4					0,4 / -0,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 464 lm total luminous flux											


**Coeficiente de utilização**

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	108	103	98	95	105	100	96	93	95	92	89	91	88	86	86	84	82	80
2	98	89	83	77	95	87	81	75	83	78	73	79	75	71	76	72	69	66
3	89	78	70	64	86	76	69	63	73	66	61	70	64	60	67	62	58	56
4	81	69	61	54	79	68	60	53	65	58	52	62	56	51	59	54	50	47
5	75	62	53	46	72	61	52	46	58	51	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	42	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	43	36	31	42	35	31	40	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	27	37	31	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	29	25	35	29	25	23

**Quantidade de luminárias**

**Luminaire budgetary diagram**

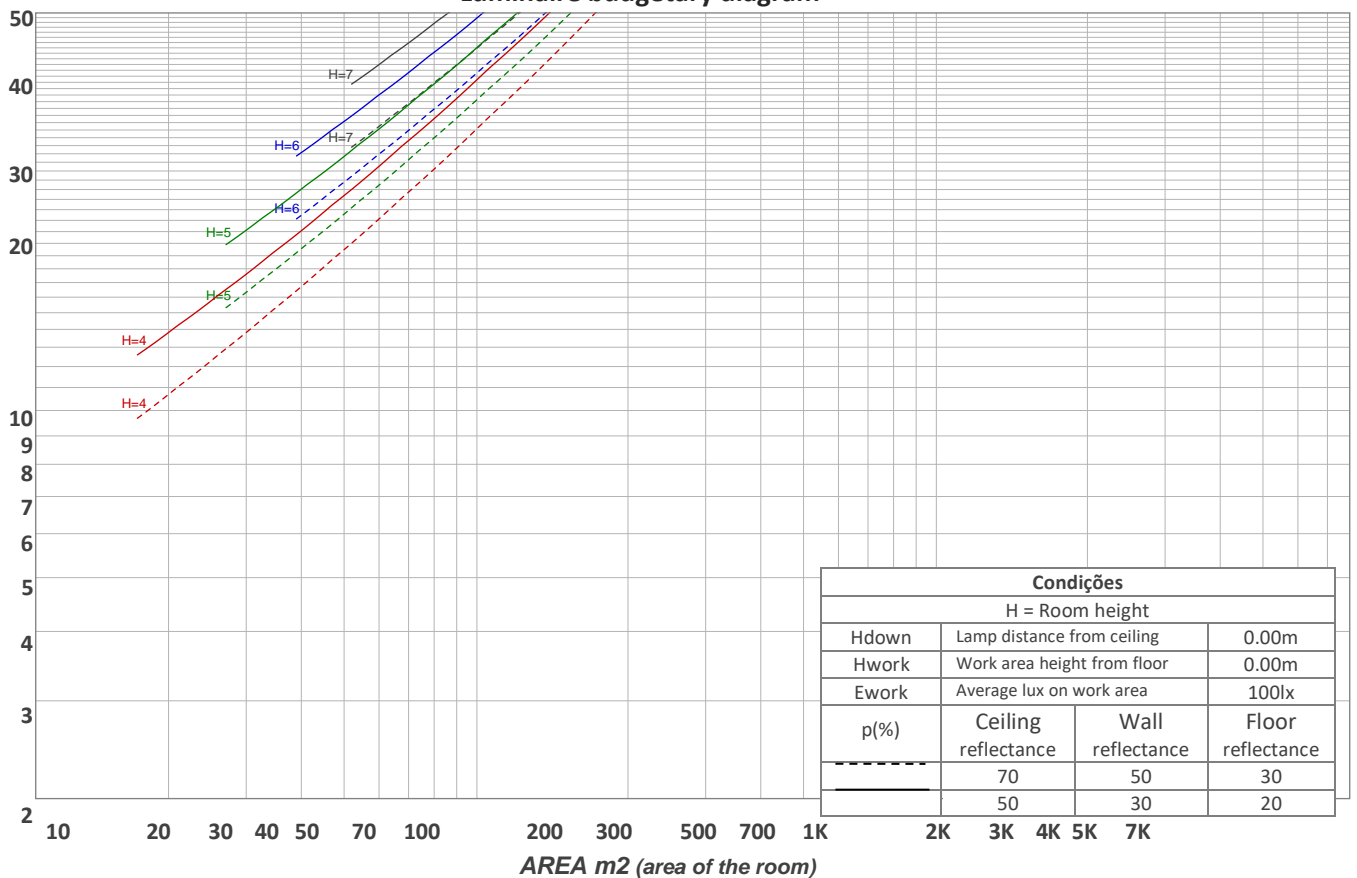

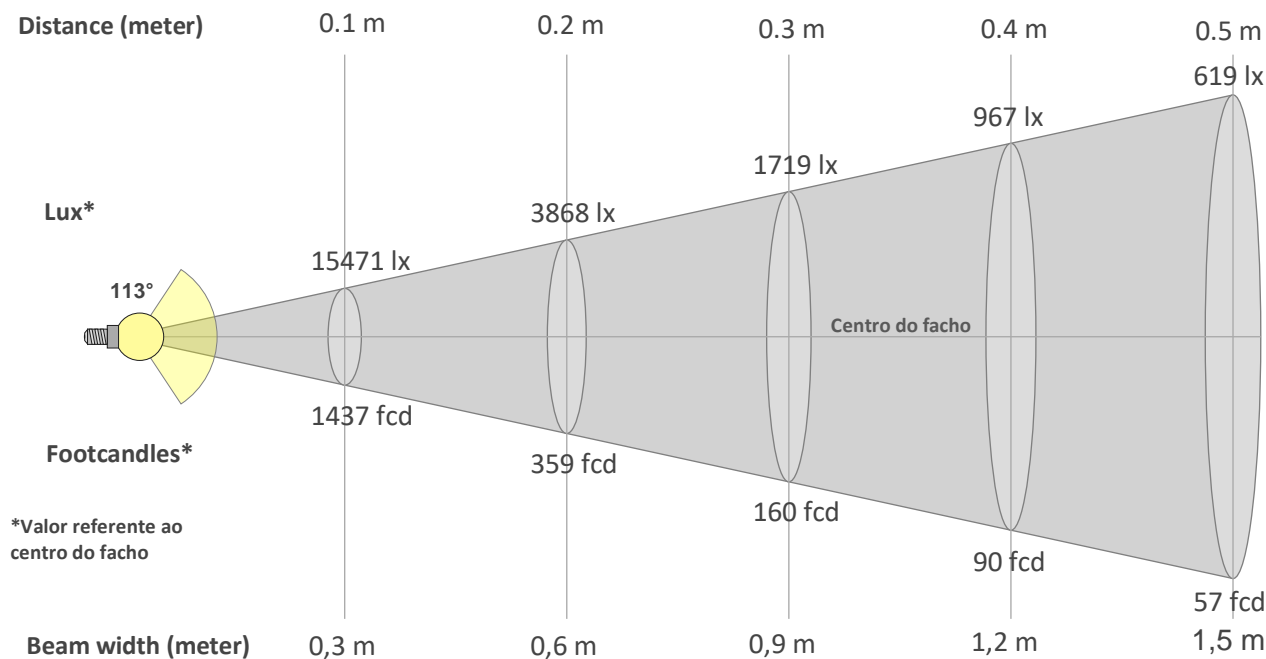

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
155lx	39lx	17lx	10lx	6lx	4lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx
14,4fcd	3,6fcd	1,6fcd	0,9fcd	0,6fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd	0fcd

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
155	154	152	149	144	138	131	122	113	103	93	82	70	57	44	31	19	9	5	4
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	6%	3%	3%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
155	154	152	148	143	137	130	122	112	102	91	80	68	55	42	29	17	7	2	2
100%	99%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	44%	35%	27%	19%	11%	5%	1%	1%

### Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
155	154	152	149	144	138	131	122	113	103	93	82	70	57	44	31	19	9	5	4
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	6%	3%	3%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
155	154	152	148	143	137	130	122	112	102	91	80	68	55	42	29	17	7	2	2
100%	99%	98%	96%	93%	89%	84%	79%	72%	66%	59%	52%	44%	35%	27%	19%	11%	5%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
113°	162,4°	192,3°	75,0%	50,9%

**iso-candela diagram**

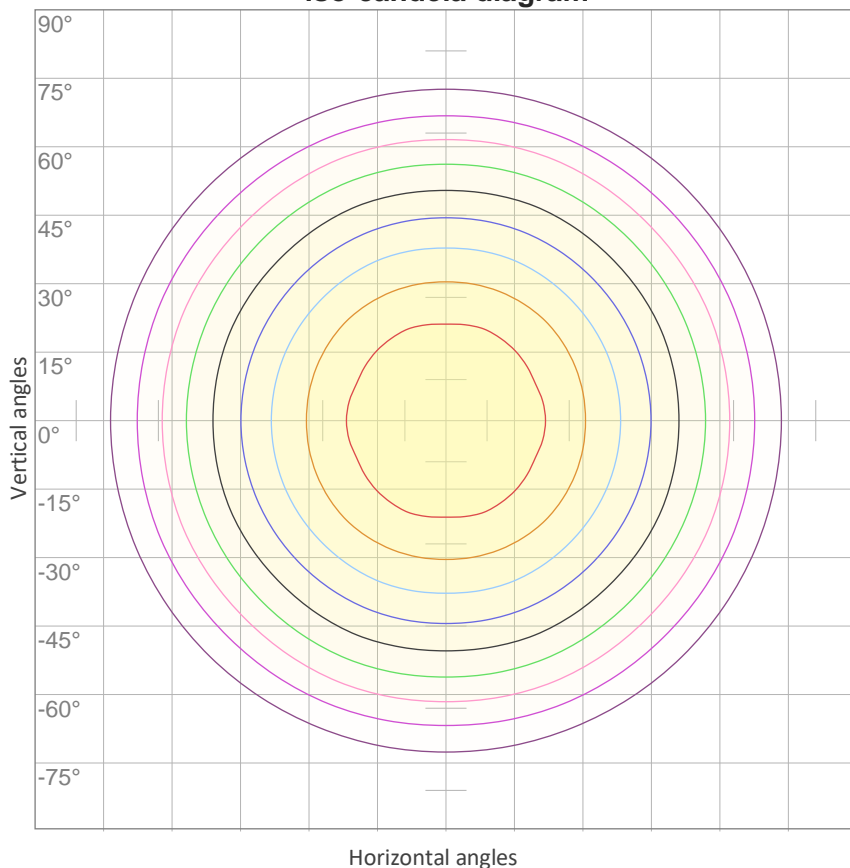


10%	15 cd
20%	31 cd
30%	46 cd
40%	62 cd
50%	77 cd
60%	93 cd
70%	108 cd
80%	124 cd
90%	139 cd

Conditions:

Number of c-planes: 16

Candela at center: 155 cd

**iso-lux diagram**

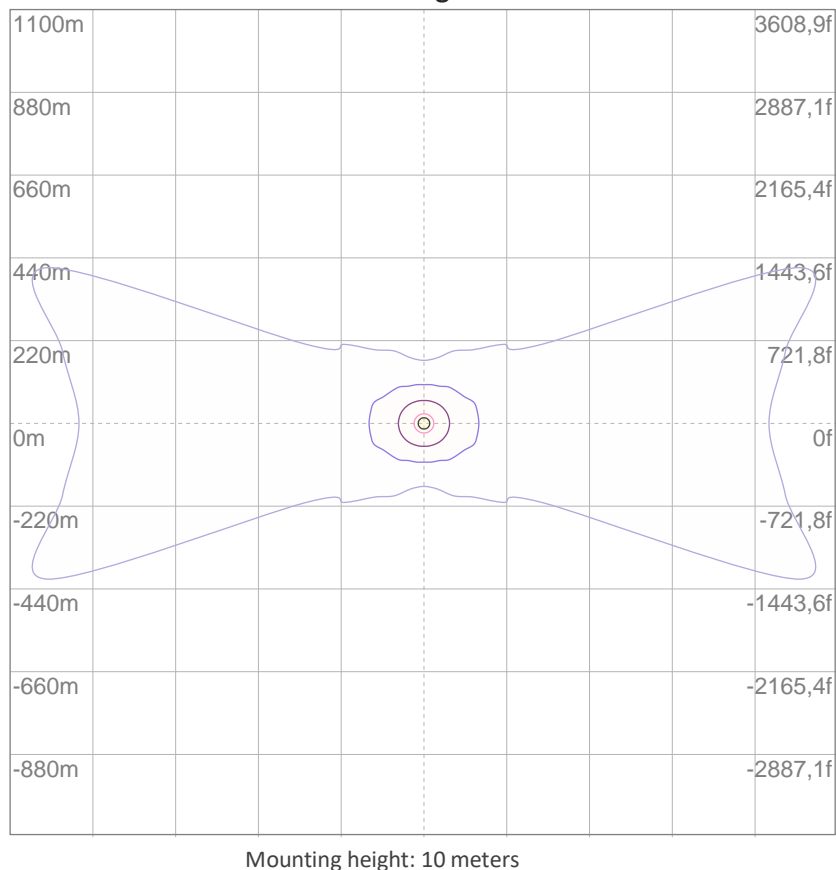

3%	46,4m lx
5%	77,4m lx
10%	0,155 lx
30%	0,464 lx
50%	0,774 lx

Conditions:

Number of c-planes: 16

Lux at center: 1,55 lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

**Potência**


**Vttagem: 12,0 V**

**Corrente: 0,800 A**

**Frequência: 0 Hz**

**FP: 1,0**

**THD**



**THD corrente: n/a**

**THD tensão: n/a**