

SLED9099 - BARRA DE LED 18WM 9000K 90



As barras de LED, com potências de 18W e 23W, foram desenvolvidas para uma aplicação de alta performance. Possuem 120 ou 240 LEDs por metro, 8 temperaturas de cor e ainda a possibilidade de Tunable White. Na versão Tunable White, as temperaturas de cor vão de 1800K até 9000K e podem ser customizadas para intervalos de TCC específicos.

Fluxo luminoso – 1735 lm/m

Potência – 18,2 W/m


Intensidade pico – 569cd

CCT – 9288K



IRC – 97,1

Coordenada CIE 1931 – x- 0,285 y- 0,294

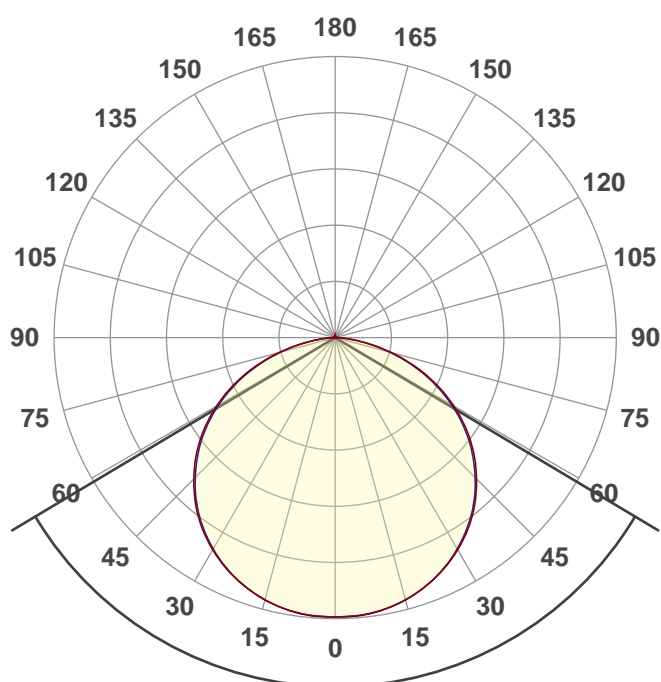

Facho de abertura

118,3°

Data do ensaio

29/09/2020 16:41:23


Rf 91,8



Fidelity index Rf

Rg 99,8


Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	93	0%	0%
2	97	0%	1%
3	96	-1%	-2%
4	94	-1%	-1%
5	89	-6%	-2%
6	96	-2%	0%
7	96	-2%	2%
8	87	-5%	8%
9	89	-2%	9%
10	85	1%	12%
11	82	3%	9%
12	95	3%	1%
13	93	5%	0%
14	91	2%	-1%
15	89	8%	-6%
16	97	-1%	1%

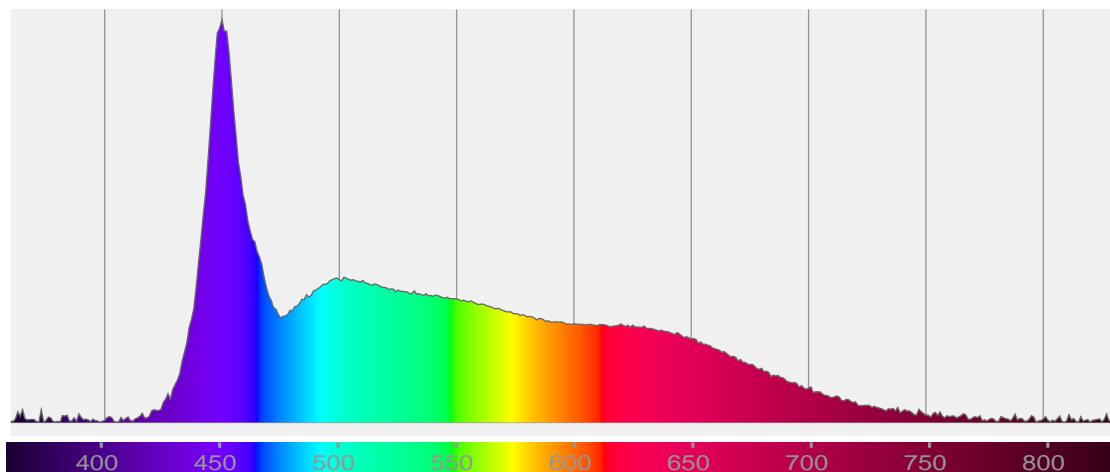


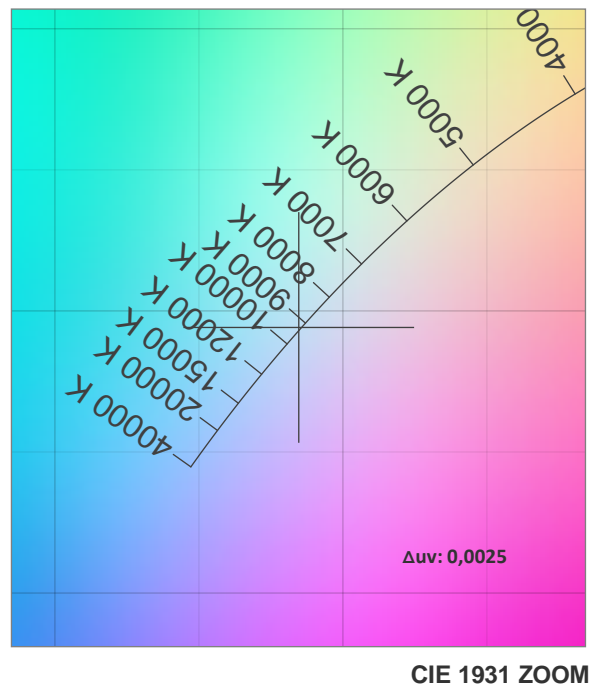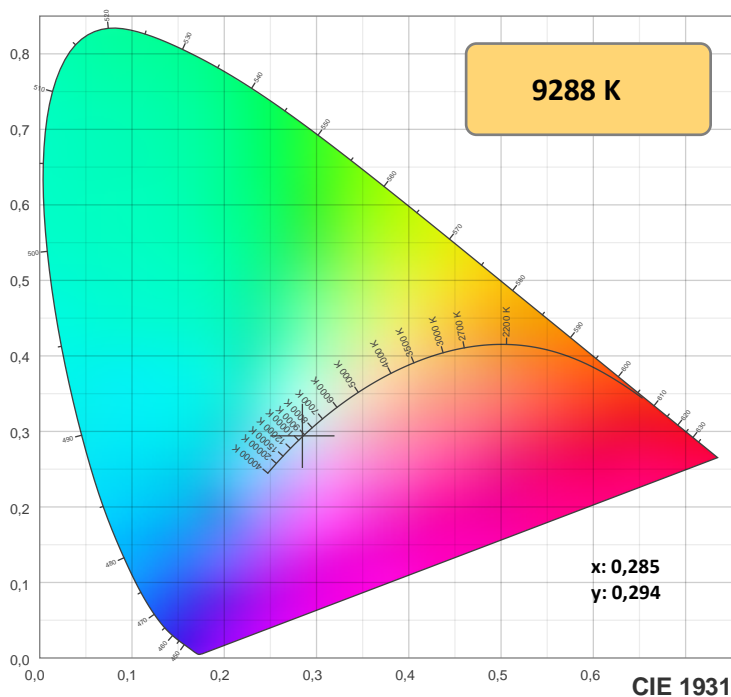

TM-30: 91,8

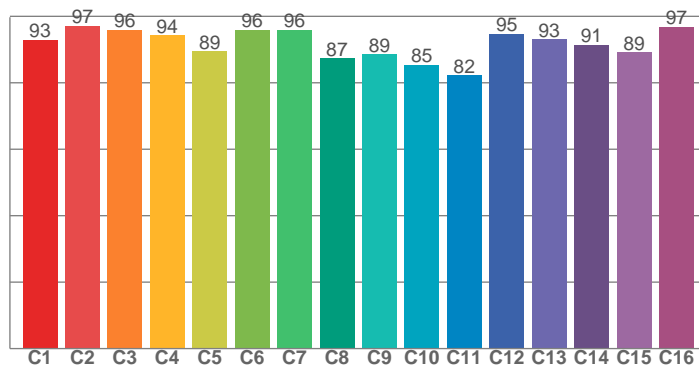

CRI: 97,1 (R1-R8)

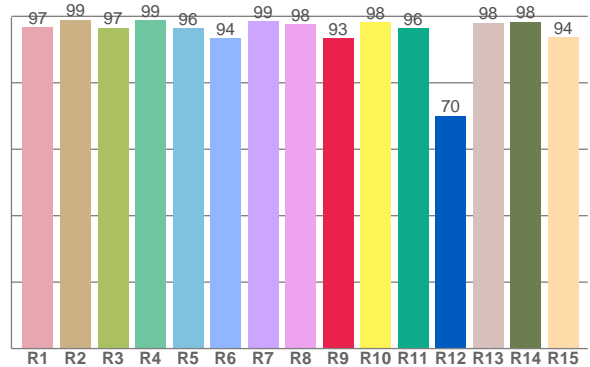

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,6	98,9	96,6	98,8	96,3	93,5	98,6	97,6	93,4	98,2	96,4	70,0	98,1	98,4	93,7

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,8	97,1	95,9	94,3	89,4	95,9	95,9	87,3	88,5	85,4	82,2	94,8	93,1	91,4	89,2	96,8

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
9288 K	97,1	93,4	91,8	99,8	94,5	0,285	0,294	0,191	0,296	0,0025







Rf 91,8

Fidelity index Rf

Rg 99,8

Gamut index Rg

Hue Bin	R _i	Shifts (%)	
		Chroma	Hue
1	93	0%	0%
2	97	0%	1%
3	96	-1%	-2%
4	94	-1%	-1%
5	89	-6%	-2%
6	96	-2%	0%
7	96	-2%	2%
8	87	-5%	8%
9	89	-2%	9%
10	85	1%	12%
11	82	3%	9%
12	95	3%	1%
13	93	5%	0%
14	91	2%	-1%
15	89	8%	-6%
16	97	-1%	1%

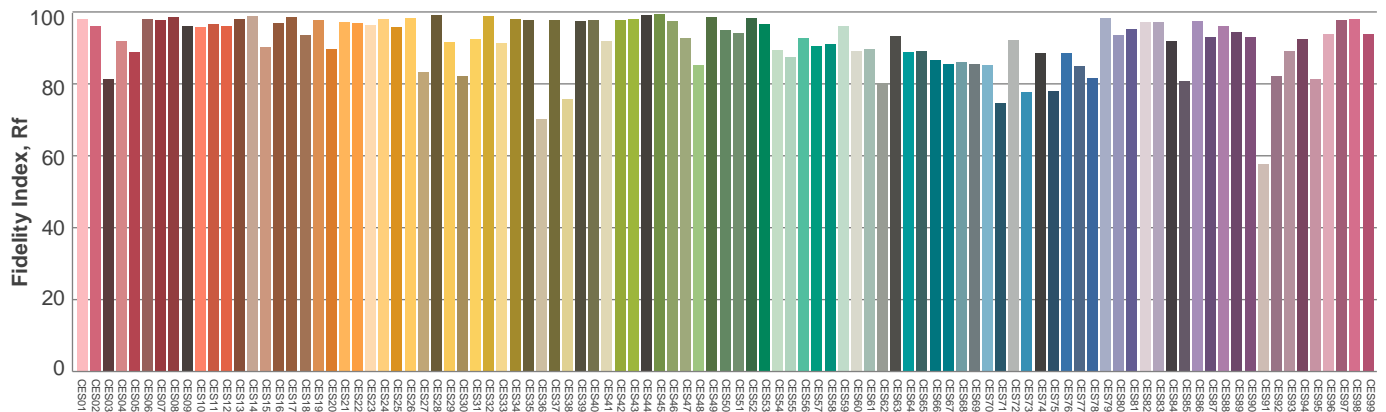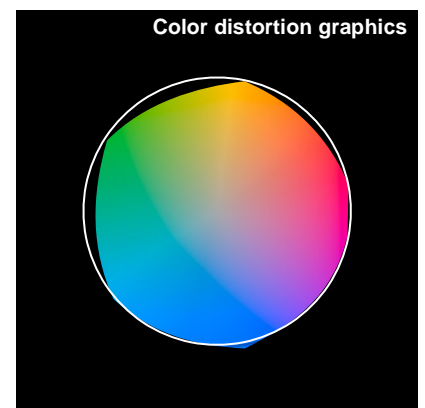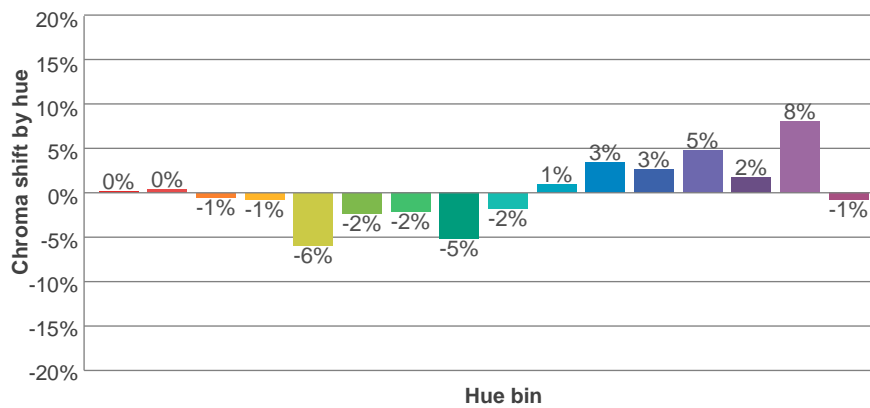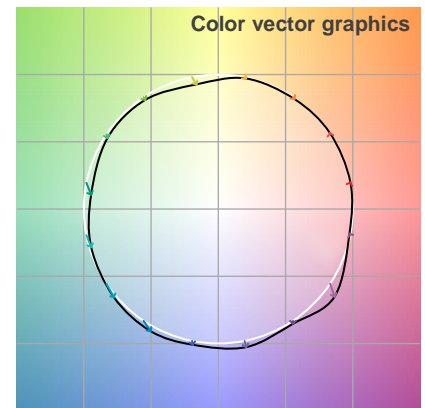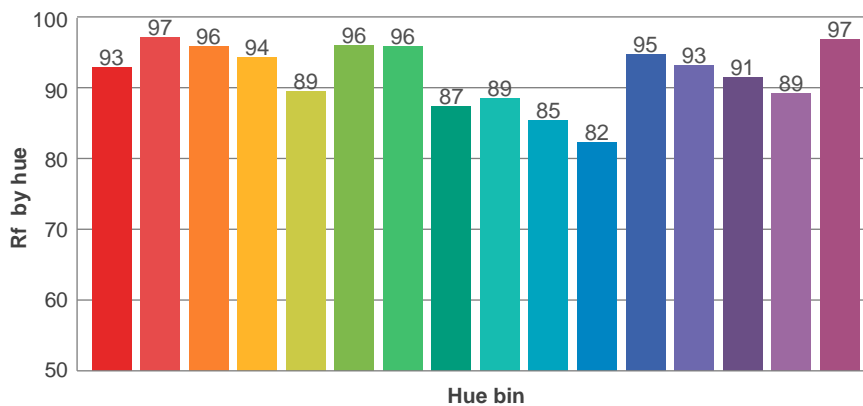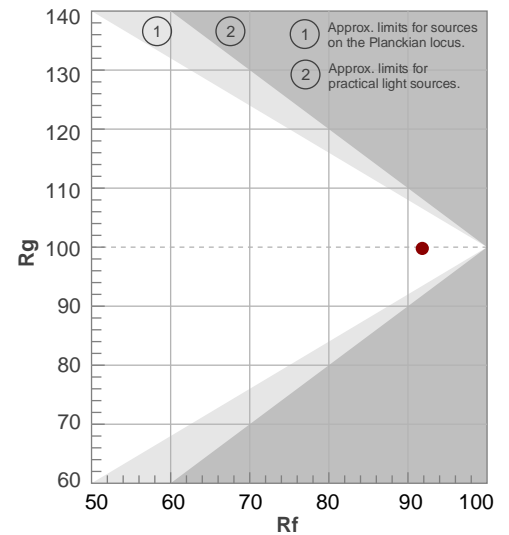

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	30,5	31,8	30,8	32,1	32,3	31,6	32,8	31,8	33,1	33,4
	3H	31,7	33,0	32,1	33,3	33,5	33,0	34,3	33,5	34,6	34,8
	4H	32,1	33,4	32,6	33,6	33,9	33,7	34,9	34,1	35,2	35,4
	6H	32,4	33,5	32,7	33,8	34,2	34,1	35,2	34,5	35,5	35,9
	8H	32,5	33,5	32,8	33,8	34,2	34,2	35,3	34,6	35,6	36,0
	12H	32,4	33,4	32,8	33,8	34,3	34,3	35,3	34,7	35,6	36,1
4H	2H	31,2	32,4	31,6	32,7	32,9	32,0	33,2	32,4	33,5	33,7
	3H	32,6	33,6	33,0	34,0	34,4	33,7	34,7	34,1	35,1	35,5
	4H	33,0	34,0	33,5	34,4	35,0	34,3	35,3	34,8	35,7	36,2
	6H	33,3	34,2	33,8	34,6	35,0	34,8	35,7	35,3	36,1	36,5
	8H	33,4	34,2	33,9	34,6	35,0	35,0	35,8	35,5	36,2	36,5
	12H	33,4	34,1	33,9	34,5	35,0	35,0	35,7	35,5	36,2	36,6
8H	4H	33,3	34,1	33,8	34,5	34,9	34,5	35,3	35,0	35,6	36,0
	6H	33,7	34,3	34,2	34,8	35,3	35,0	35,6	35,5	36,1	36,7
	8H	33,8	34,3	34,3	34,9	35,5	35,2	35,8	35,8	36,3	37,0
	12H	33,8	34,3	34,4	34,8	35,4	35,4	35,8	35,9	36,3	36,9
12H	4H	33,3	33,9	33,8	34,4	34,9	34,4	35,1	34,9	35,5	36,0
	6H	33,7	34,3	34,2	34,8	35,4	35,1	35,6	35,6	36,1	36,8
	8H	33,8	34,3	34,4	34,8	35,4	35,3	35,7	35,8	36,2	36,8
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,0 / -0,1				
S = 1.5H		0,3 / -0,4					0,2 / -0,3				
S = 2.0H		0,6 / -0,8					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1735 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83
2	98	90	83	77	96	88	82	76	84	79	74	81	76	72	78	74	71	69
3	89	79	70	64	87	77	69	63	74	67	62	71	66	61	68	64	60	57
4	82	70	61	54	79	68	60	53	66	58	53	63	57	52	61	55	51	49
5	75	62	53	46	73	61	52	46	59	51	45	57	50	45	55	49	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	37
7	64	50	42	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	26
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23

Quantidade de luminárias

Luminaire budgetary diagram

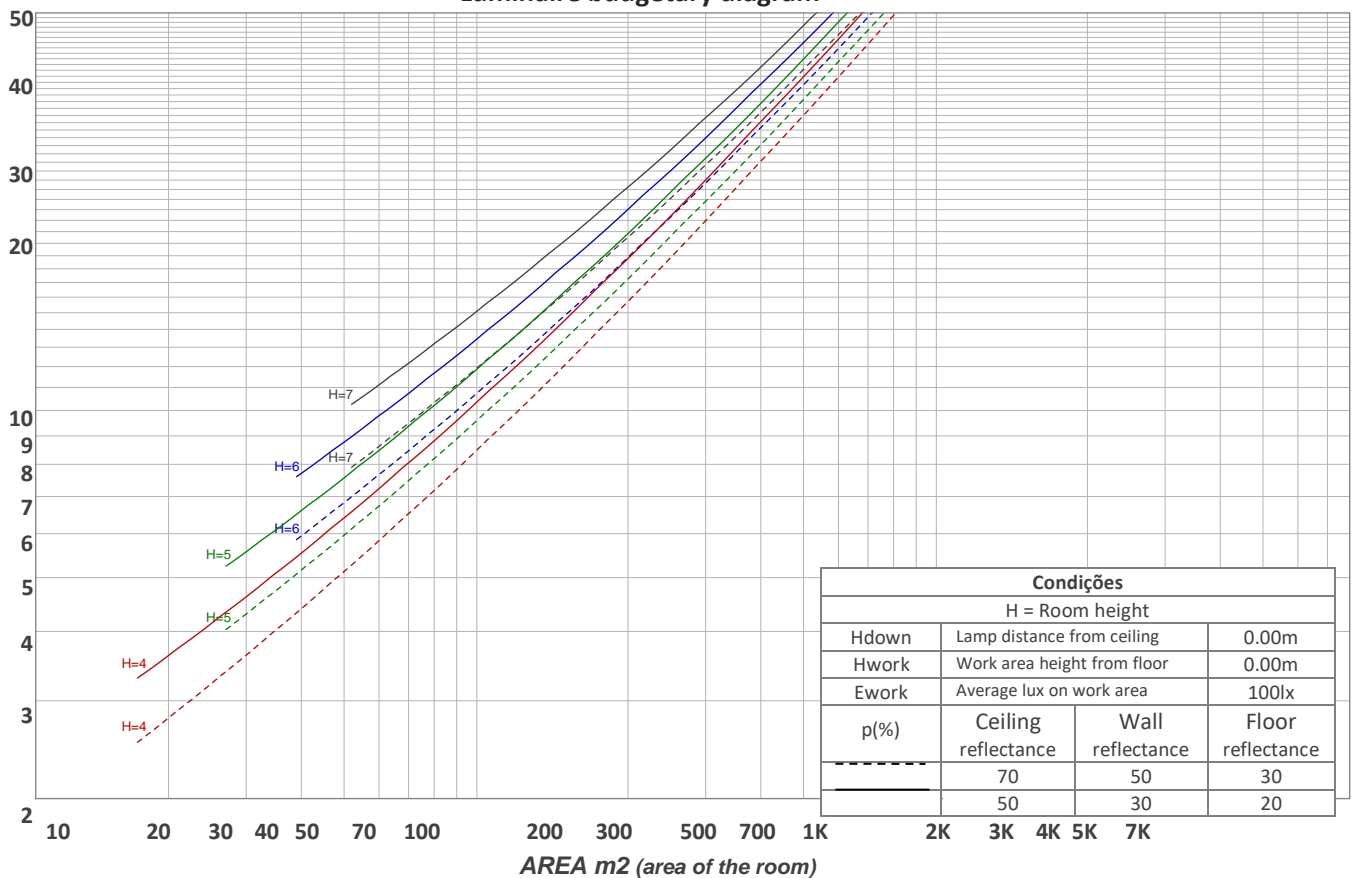

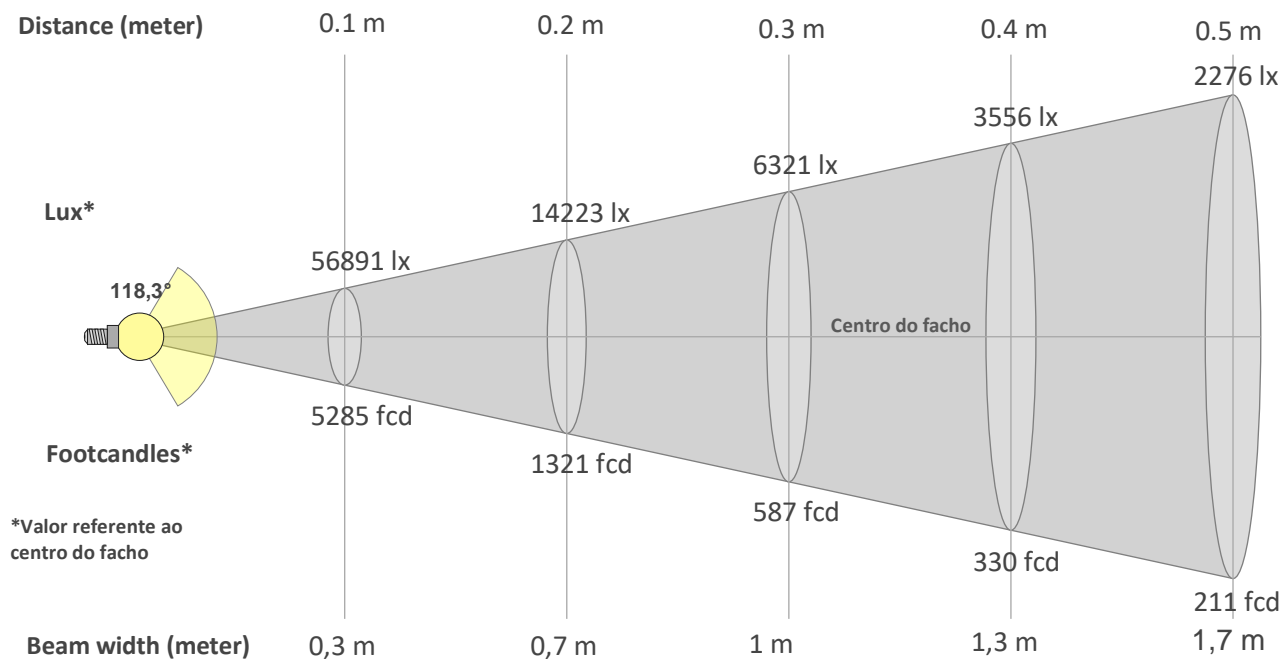

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
569lx	142lx	63lx	36lx	23lx	16lx	12lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx
52,9fcd	13,2fcd	5,9fcd	3,3fcd	2,1fcd	1,5fcd	1,1fcd	0,8fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
569	567	562	553	539	521	499	473	442	407	369	326	279	228	175	120	68	26	5	1
100%	100%	99%	97%	95%	92%	88%	83%	78%	71%	65%	57%	49%	40%	31%	21%	12%	5%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
569	567	562	552	538	519	496	469	438	402	363	320	273	223	170	116	65	25	5	2
100%	100%	99%	97%	94%	91%	87%	82%	77%	71%	64%	56%	48%	39%	30%	20%	11%	4%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
569	567	562	553	539	521	499	473	442	407	369	326	279	228	175	120	68	26	5	1
100%	100%	99%	97%	95%	92%	88%	83%	78%	71%	65%	57%	49%	40%	31%	21%	12%	5%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
569	567	562	552	538	519	496	469	438	402	363	320	273	223	170	116	65	25	5	2
100%	100%	99%	97%	94%	91%	87%	82%	77%	71%	64%	56%	48%	39%	30%	20%	11%	4%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
118,3°	162°	174,3°	77,5%	51,9%

iso-candela diagram

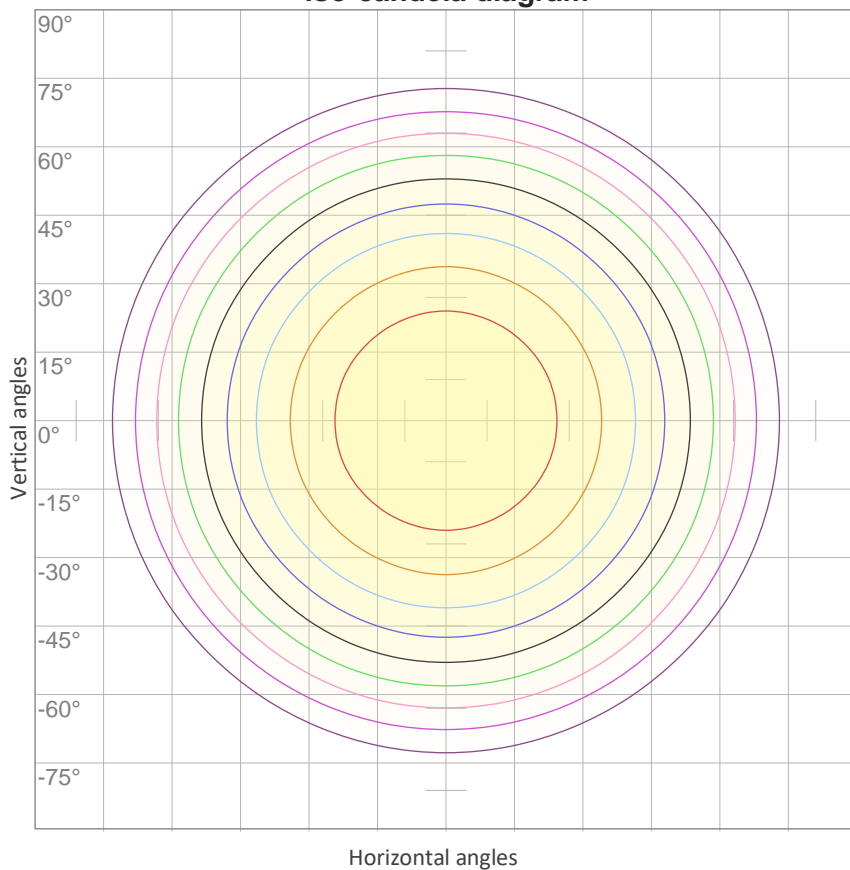


10%	57 cd
20%	114 cd
30%	171 cd
40%	228 cd
50%	284 cd
60%	341 cd
70%	398 cd
80%	455 cd
90%	512 cd

Conditions:

Number of c-planes: 16

Candela at center: 569 cd

iso-lux diagram

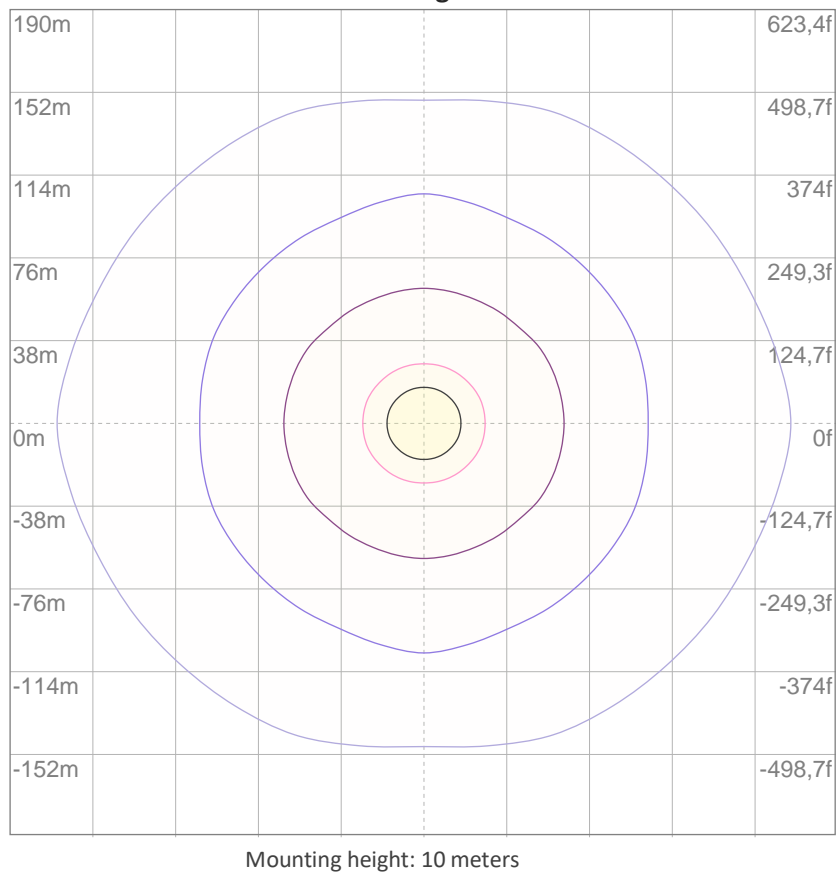

3%	0,171 lx
5%	0,284 lx
10%	0,569 lx
30%	1,71 lx
50%	2,84 lx

Conditions:

Number of c-planes: 16

Lux at center: 5,69 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência

Vttagem: 12,0 V

Corrente: 1,52 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a