

## SLED9099 - BARRA DE LED 18WM 3000K 90



As barras de LED, com potências de 18W e 23W, foram desenvolvidas para uma aplicação de alta performance. Possuem 120 ou 240 LEDs por metro, 8 temperaturas de cor e ainda a possibilidade de Tunable White. Na versão Tunable White, as temperaturas de cor vão de 1800K até 9000K e podem ser customizadas para intervalos de TCC específicos.

Fluxo luminoso – 1555 lm/m

Potência – 18,2 W/m


Intensidade pico – 513cd

CCT – 2939K



IRC – 93,9

Coordenada CIE 1931 – x- 0,438 y- 0,398

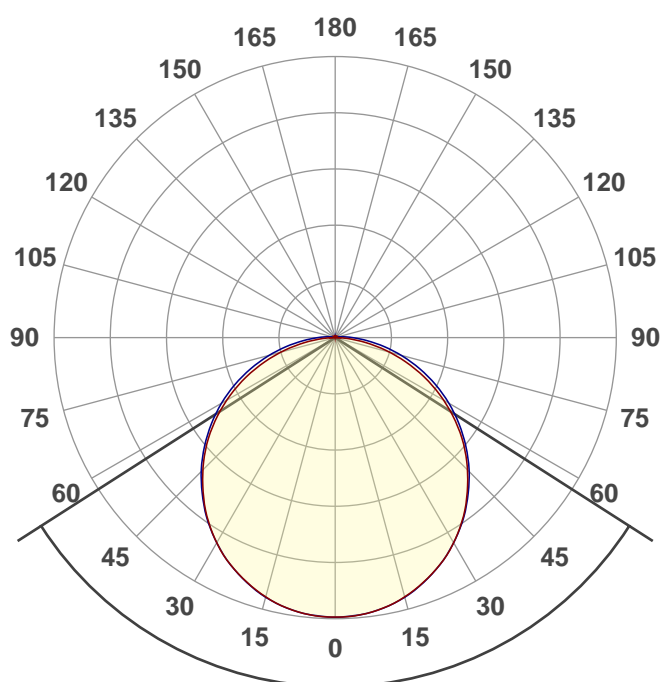

Facho de abertura

**114,7°**

Data do ensaio

04/11/2020 16:32:55


**Rf 91,1**



Fidelity index Rf

**Rg 98,9**


Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	91	-4%	1%
2	92	-3%	3%
3	91	-1%	4%
4	93	-3%	0%
5	94	-1%	2%
6	96	1%	0%
7	92	-4%	1%
8	96	-2%	1%
9	91	-2%	5%
10	87	0%	9%
11	87	3%	9%
12	90	6%	1%
13	92	3%	-5%
14	88	4%	-8%
15	92	-3%	-3%
16	86	-2%	-11%

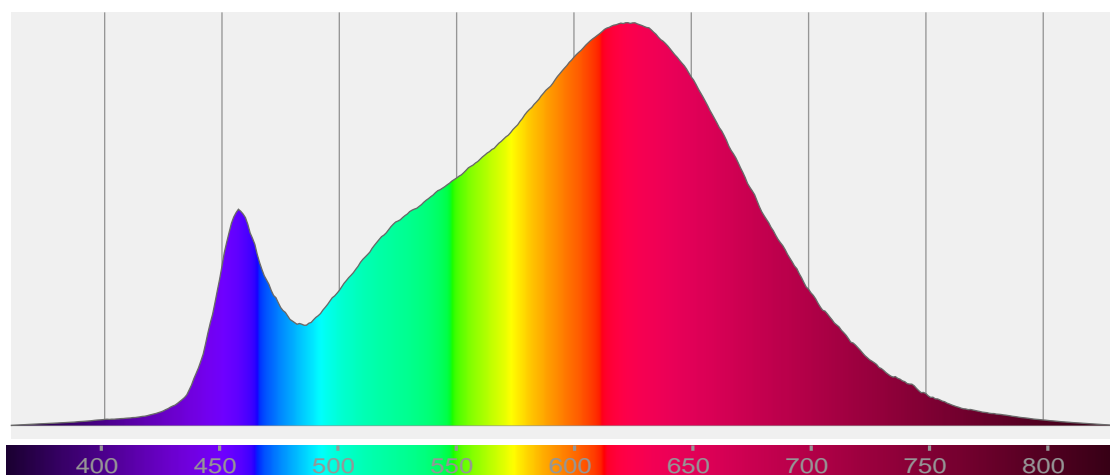


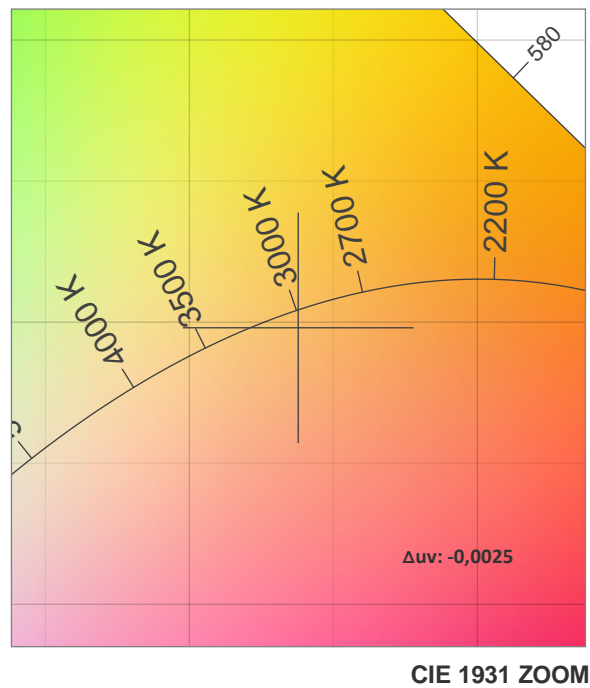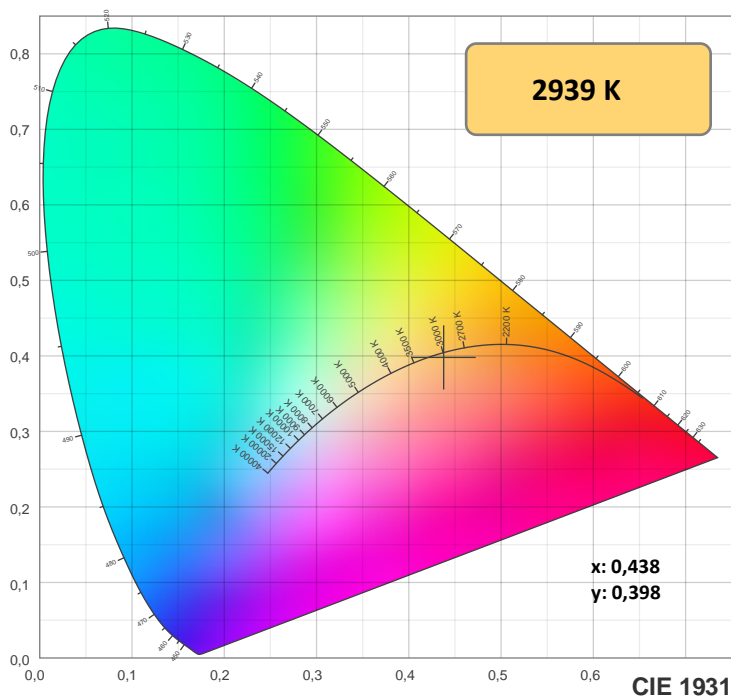

TM-30: 91,1

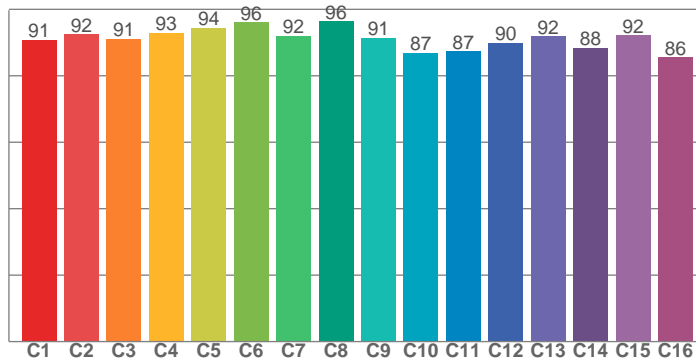

CRI: 93,9 (R1-R8)

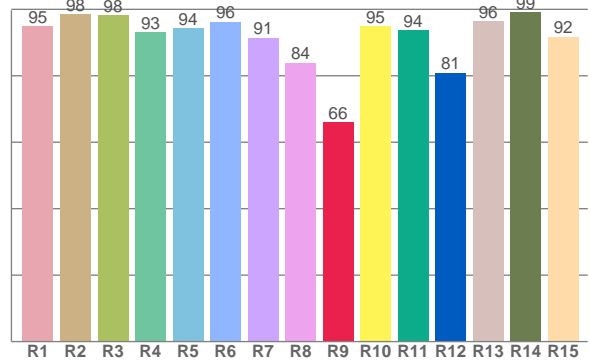

CRiRa R1-R8 / CRiRe R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,0	98,4	98,3	93,2	94,4	96,2	91,5	83,9	66,1	94,8	93,8	81,0	96,3	99,1	91,7

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,8	92,5	91,2	92,9	94,4	96,1	92,0	96,4	91,4	86,8	87,3	90,0	91,9	88,4	92,2	85,6

## Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
2939 K	93,9	66,1	91,1	98,9	90,7	0,438	0,398	0,254	0,346	-0,0025







**Rf 91,1**

Fidelity index Rf

**Rg 98,9**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	91	-4%	1%
2	92	-3%	3%
3	91	-1%	4%
4	93	-3%	0%
5	94	-1%	2%
6	96	1%	0%
7	92	-4%	1%
8	96	-2%	1%
9	91	-2%	5%
10	87	0%	9%
11	87	3%	9%
12	90	6%	1%
13	92	3%	-5%
14	88	4%	-8%
15	92	-3%	-3%
16	86	-2%	-11%

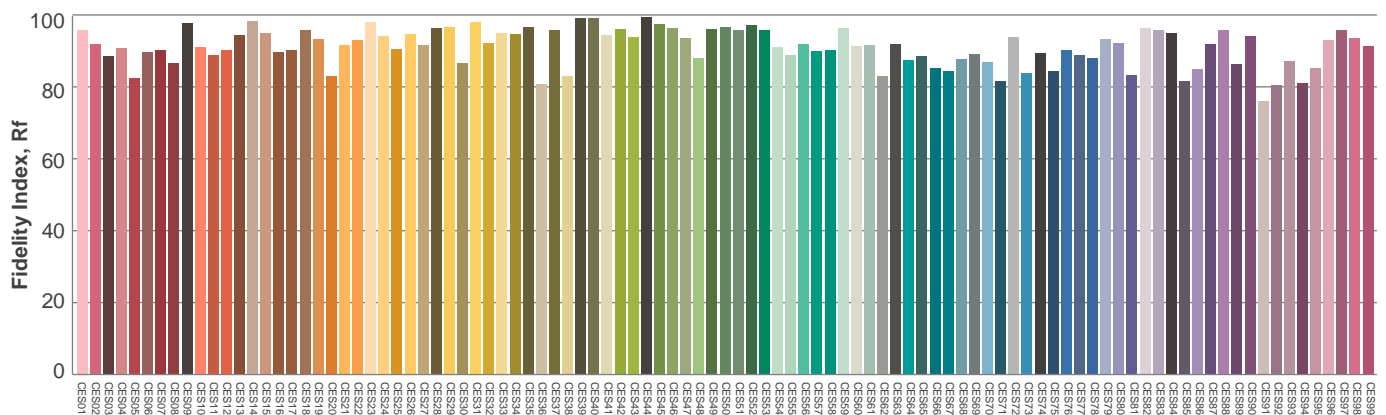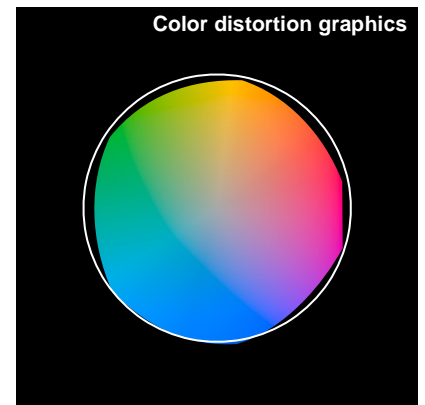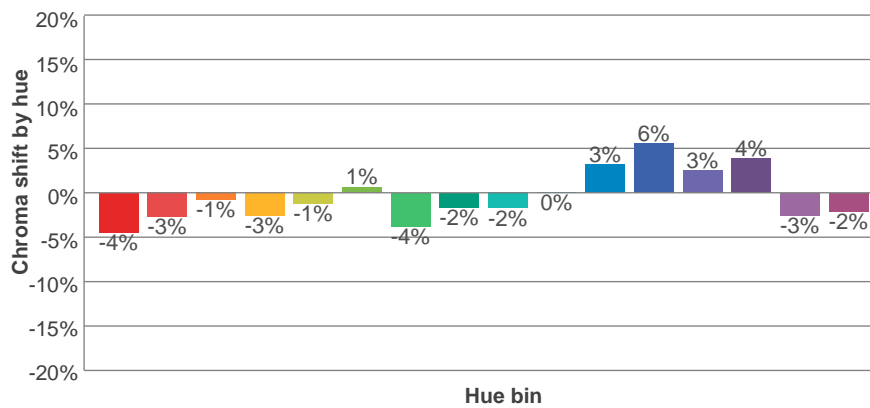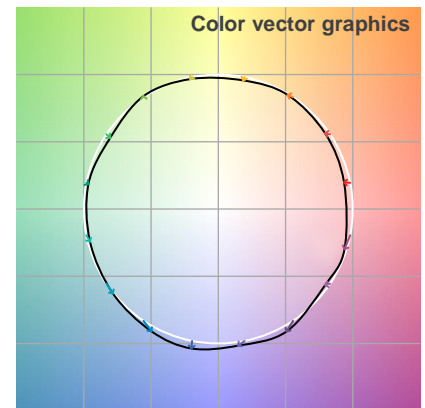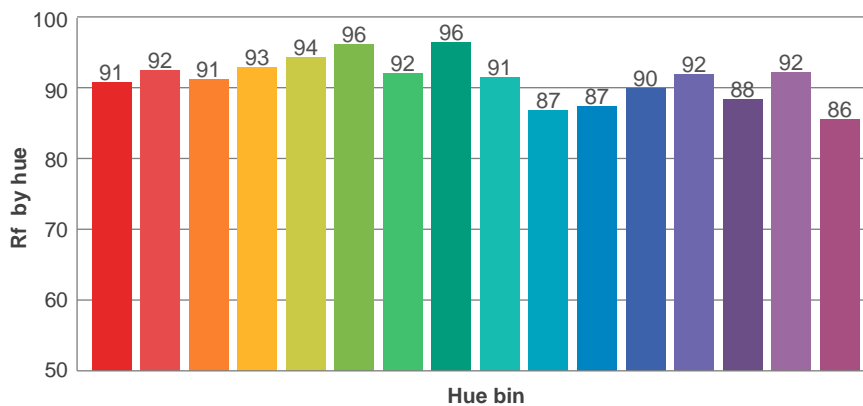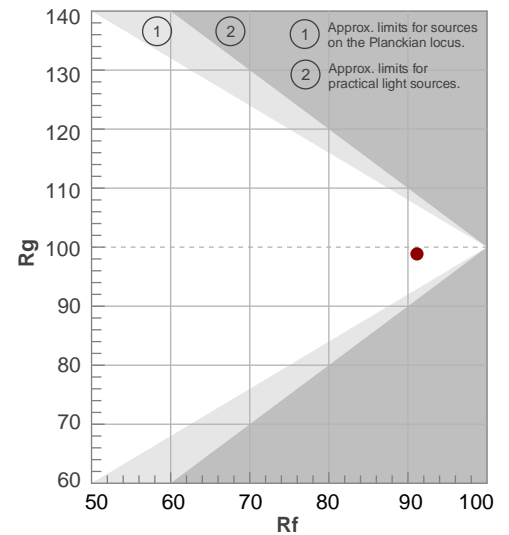

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23,2	24,5	23,5	24,8	25,1	23,5	24,8	23,8	25,1	25,4
	3H	24,7	26,0	25,1	26,3	26,5	25,3	26,5	25,7	26,9	27,1
	4H	25,3	26,5	25,8	26,8	27,1	26,1	27,3	26,5	27,6	27,9
	6H	25,8	26,9	26,2	27,2	27,6	26,9	28,0	27,2	28,3	28,7
	8H	26,0	27,0	26,3	27,3	27,8	27,2	28,3	27,6	28,6	29,0
	12H	26,0	27,0	26,4	27,4	27,9	27,5	28,5	27,9	28,9	29,4
4H	2H	23,9	25,1	24,3	25,4	25,7	24,1	25,4	24,6	25,7	26,0
	3H	25,7	26,7	26,1	27,1	27,5	26,2	27,2	26,6	27,6	28,0
	4H	26,4	27,3	26,8	27,7	28,3	27,1	28,0	27,5	28,4	29,0
	6H	26,9	27,8	27,4	28,2	28,6	27,9	28,8	28,5	29,2	29,6
	8H	27,1	27,9	27,6	28,3	28,7	28,4	29,2	28,9	29,6	30,0
	12H	27,2	27,9	27,7	28,4	28,9	28,7	29,4	29,3	29,9	30,4
8H	4H	26,7	27,6	27,3	28,0	28,4	27,4	28,2	27,9	28,6	29,0
	6H	27,5	28,1	28,0	28,6	29,2	28,4	29,1	29,0	29,6	30,1
	8H	27,8	28,3	28,3	28,9	29,6	29,0	29,5	29,5	30,1	30,8
	12H	28,0	28,5	28,6	29,0	29,6	29,5	30,0	30,1	30,5	31,2
12H	4H	26,8	27,5	27,3	27,9	28,4	27,4	28,1	27,9	28,5	29,0
	6H	27,6	28,2	28,2	28,7	29,4	28,5	29,1	29,1	29,6	30,3
	8H	28,0	28,4	28,6	29,0	29,6	29,1	29,6	29,7	30,1	30,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,1				
S = 2.0H		0,4 / -0,5					0,3 / -0,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1555 lm total luminous flux											


**Coeficiente de utilização**

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69	67
3	89	78	69	63	86	76	68	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	67	59	52	65	57	51	62	56	51	60	54	50	47
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	39	50	43	38	49	42	38	36
7	64	50	41	35	62	49	41	35	47	40	34	46	39	34	44	38	33	31
8	59	46	37	31	58	45	37	31	43	36	31	42	35	30	41	34	30	28
9	55	42	33	28	54	41	33	28	40	33	27	39	32	27	37	31	27	25
10	52	39	31	25	51	38	30	25	37	30	25	36	29	25	35	29	25	23

**Quantidade de luminárias**

**Luminaire budgetary diagram**

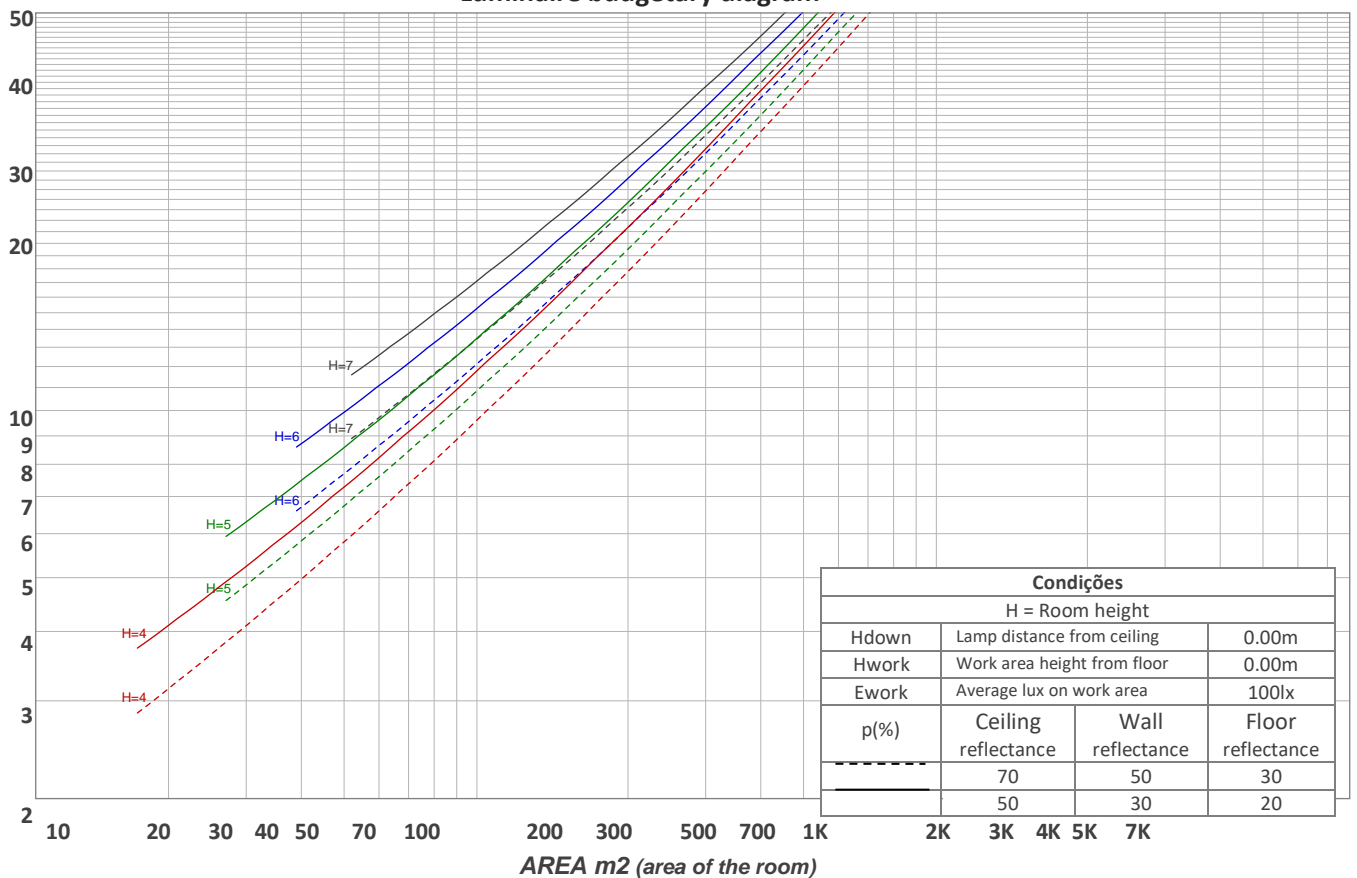

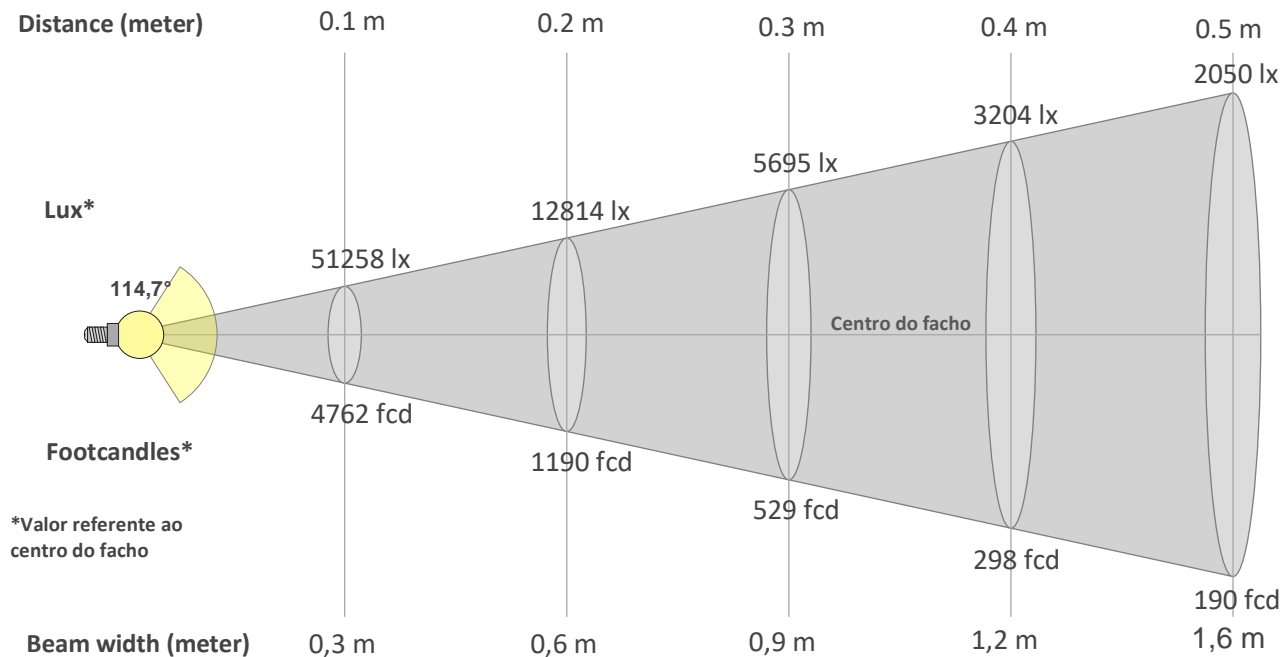

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
513lx	128lx	57lx	32lx	21lx	14lx	10lx	8lx	6lx	5lx	4lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx
47,6fcd	11,9fcd	5,3fcd	3fcd	1,9fcd	1,3fcd	1fcd	0,7fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd

### Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
513	510	504	492	476	457	434	407	376	343	308	270	230	188	145	103	63	28	5	3
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	6%	1%	1%

### Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
513	510	504	493	477	457	434	408	379	347	313	278	241	202	163	125	89	57	32	17
100%	100%	98%	96%	93%	89%	85%	80%	74%	68%	61%	54%	47%	39%	32%	24%	17%	11%	6%	3%

### Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
513	510	504	492	476	457	434	407	376	343	308	270	230	188	145	103	63	28	5	3
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	6%	1%	1%

### Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
513	510	504	493	477	457	434	408	379	347	313	278	241	202	163	125	89	57	32	17
100%	100%	98%	96%	93%	89%	85%	80%	74%	68%	61%	54%	47%	39%	32%	24%	17%	11%	6%	3%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
114,7°	167,8°	185,5°	74,9%	50,6%

**iso-candela diagram**

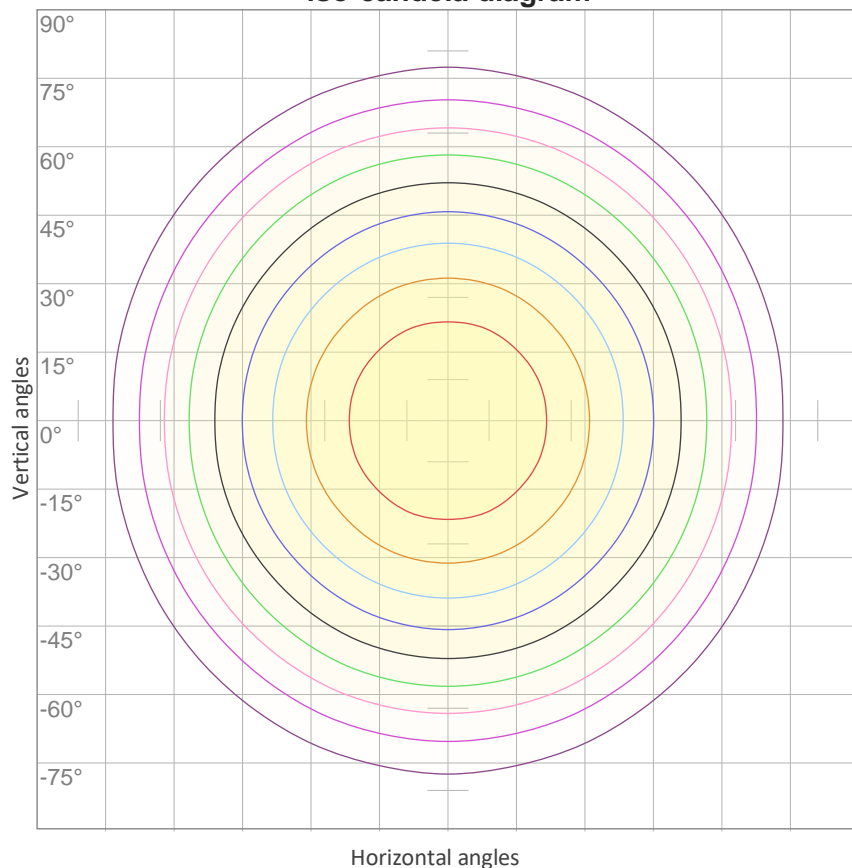


10%	51 cd
20%	103 cd
30%	154 cd
40%	205 cd
50%	256 cd
60%	308 cd
70%	359 cd
80%	410 cd
90%	461 cd

Conditions:

Number of c-planes: 16

Candela at center: 513 cd

**iso-lux diagram**

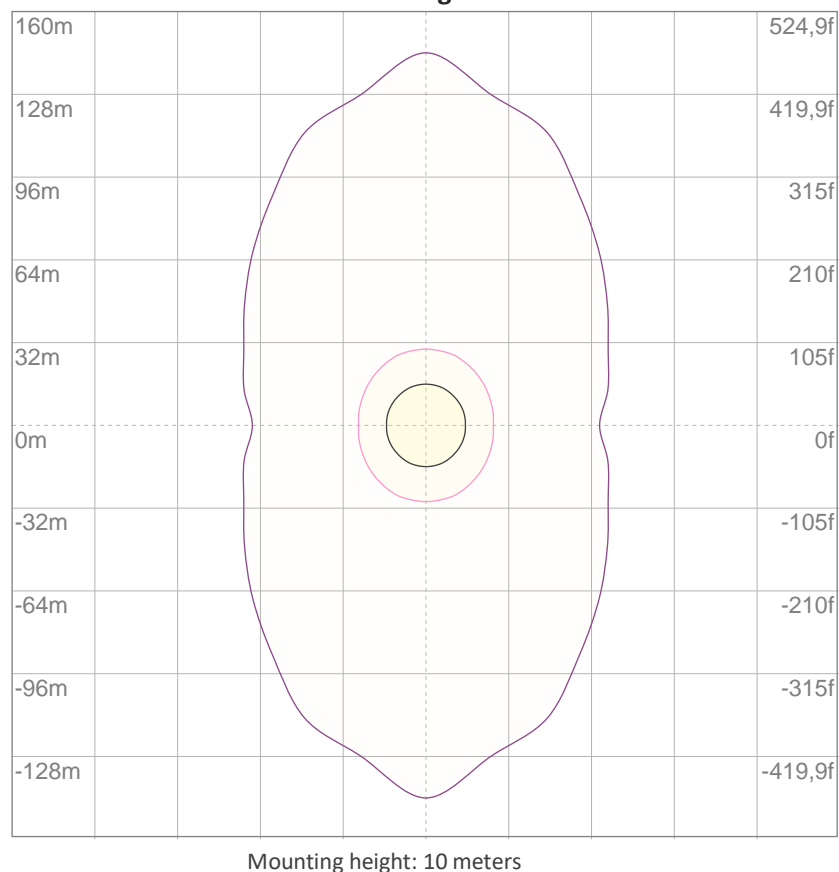

3%	0,154 lx
5%	0,256 lx
10%	0,513 lx
30%	1,54 lx
50%	2,56 lx

Conditions:

Number of c-planes: 16

Lux at center: 5,13 lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

**Potência**


**Vttagem: 12,0 V**

**Corrente: 1,52 A**

**Frequência: 0 Hz**

**FP: 1,0**

**THD**



**THD corrente: n/a**

**THD tensão: n/a**