


FITA SLED5201 IP65 9,6WM 3000K 80 - 1m

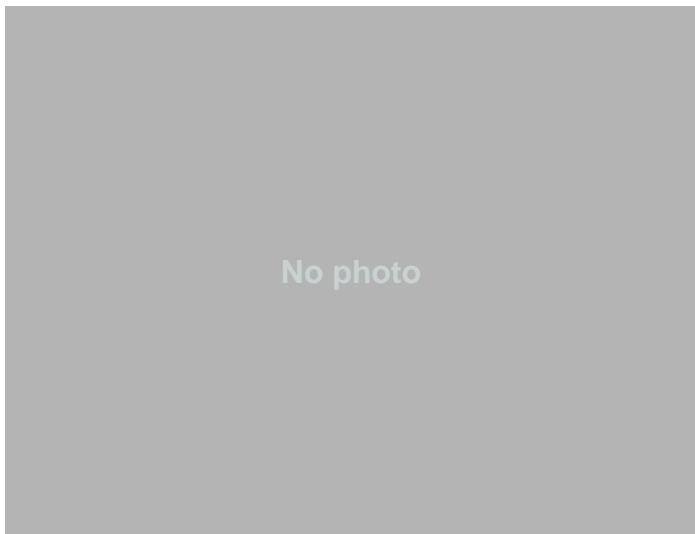

Teste fotometria- FITA DE LED

Fluxo luminoso – 1060 lm/m

Potência – 9,6 W/m

Intensidade pico – 335cd

CCT – 3105K




IRC – 83,9

Coordenada CIE 1931 – x- 0,428 y- 0,397

Data do ensaio

26/10/2020 15:12:49

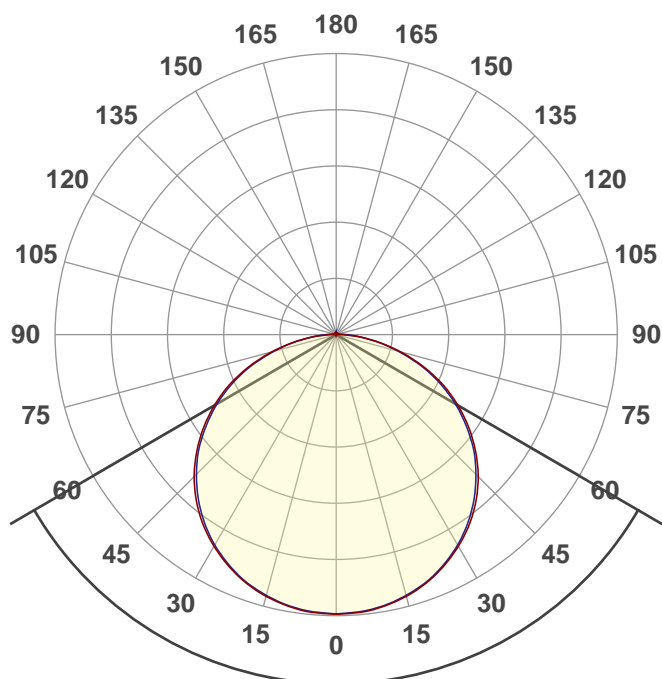

Facho de abertura

119,6°


Rf 84,8



Fidelity index Rf

Rg 95,0


Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	80	-11%	1%
2	82	-7%	6%
3	81	-3%	9%
4	91	-1%	4%
5	92	-3%	2%
6	94	0%	-2%
7	87	-7%	-3%
8	92	-4%	1%
9	87	-5%	7%
10	79	-3%	12%
11	82	2%	12%
12	86	8%	0%
13	87	4%	-8%
14	80	4%	-16%
15	80	-4%	-12%
16	77	-8%	-16%

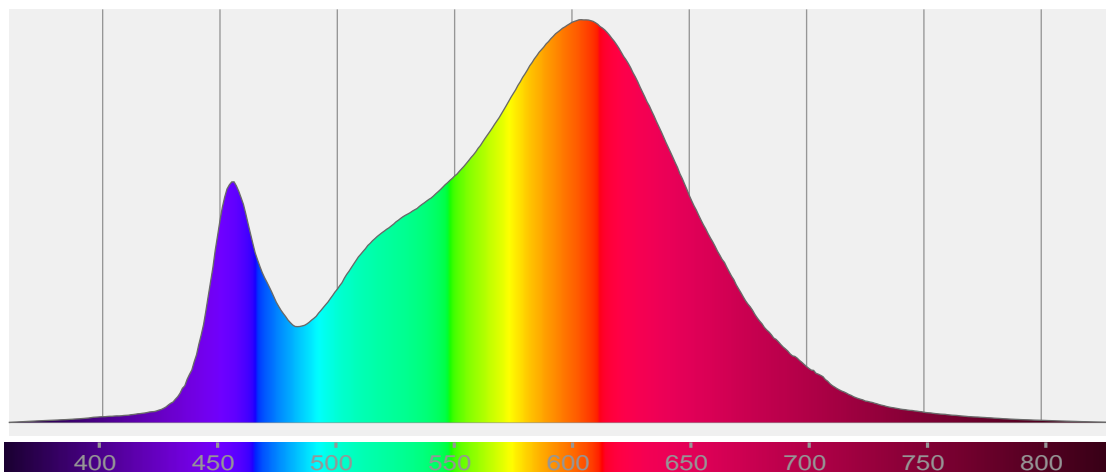


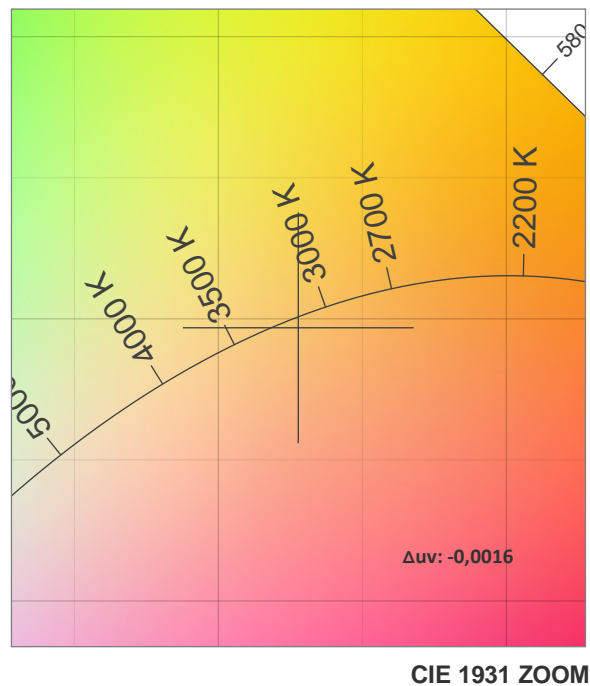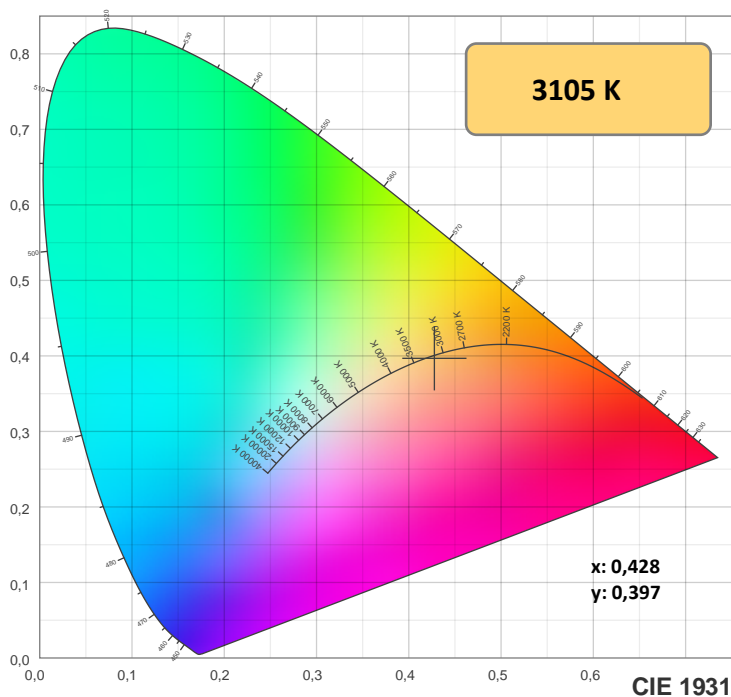

TM-30: 84,8

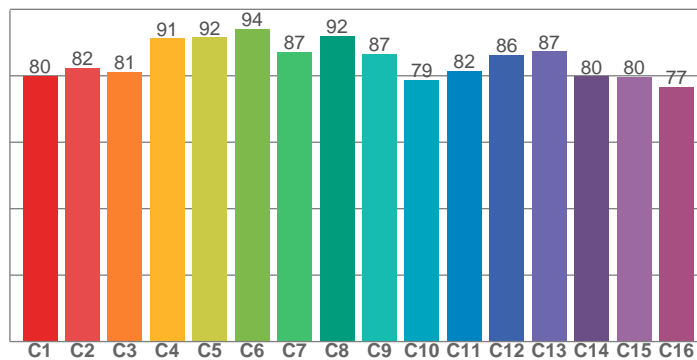

CRI: 83,9 (R1-R8)

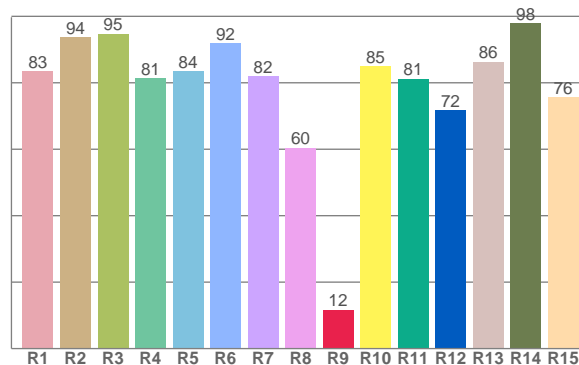

CRIRA R1-R8 / CRIR R1-R15

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83,4	93,6	94,7	81,4	83,5	92,0	82,0	60,4	11,7	84,9	81,2	71,7	86,3	98,0	75,6

TM30 valores C. 16 valores extraídos dos 99.

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,9	82,4	81,2	91,2	91,6	94,1	87,3	92,0	86,7	78,7	81,6	86,3	87,4	79,8	79,6	76,7

Parametros de cor

Temperatura de cor	Índice de reprodução de cor	Reprodução de cor vermelho R9	Color fidelity	Color gamut	Color quality scale	Coordenada de cor cie 1931	Coordenada de cor cie 1931	Coordenada de cor	Coordenada de cor	Color deviation from black body
CCT	IRC	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3105 K	83,9	11,7	84,8	95,0	82,6	0,428	0,397	0,248	0,345	-0,0016







Rf 84,8

Fidelity index Rf

Rg 95,0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	80	-11%	1%
2	82	-7%	6%
3	81	-3%	9%
4	91	-1%	4%
5	92	-3%	2%
6	94	0%	-2%
7	87	-7%	-3%
8	92	-4%	1%
9	87	-5%	7%
10	79	-3%	12%
11	82	2%	12%
12	86	8%	0%
13	87	4%	-8%
14	80	4%	-16%
15	80	-4%	-12%
16	77	-8%	-16%

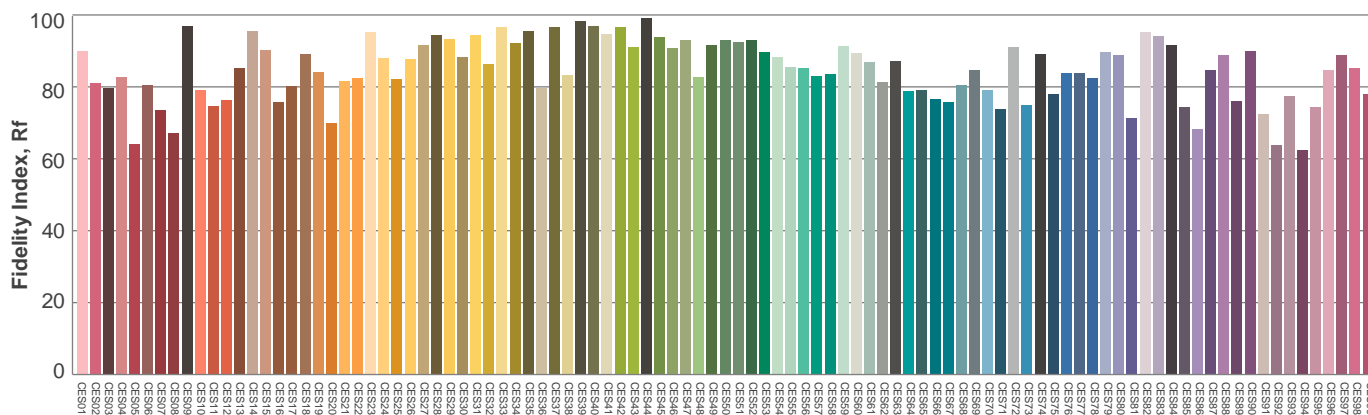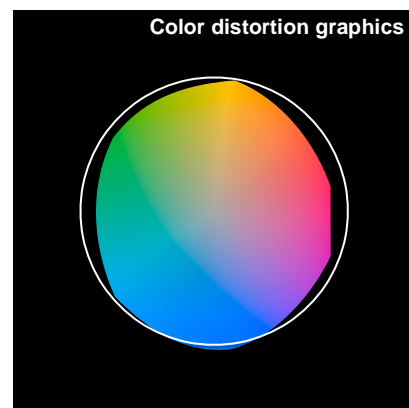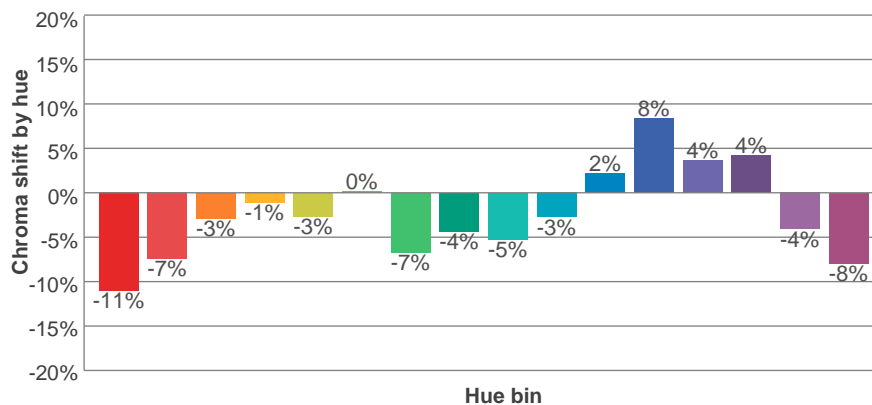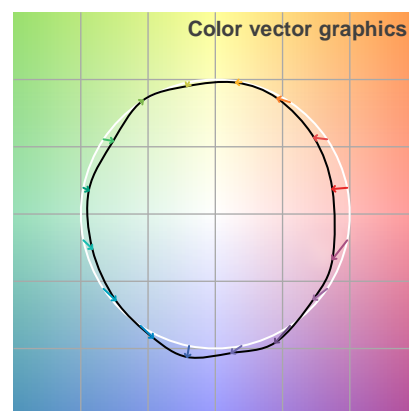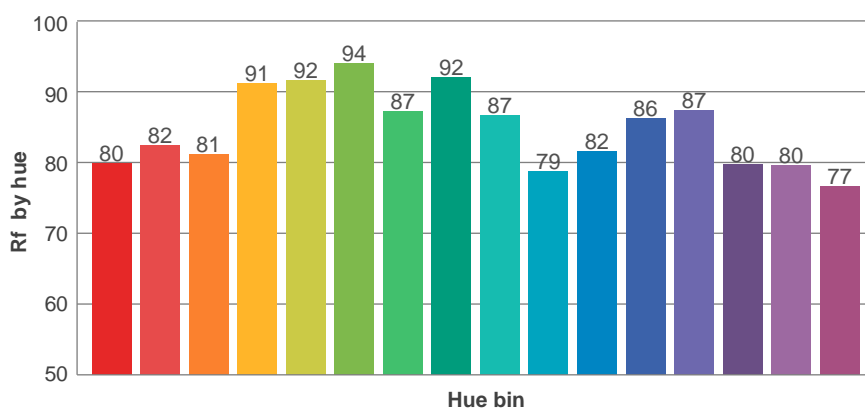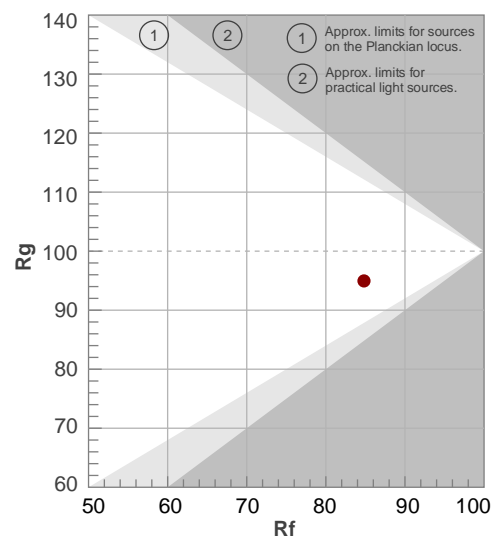

Avaliação todas as amostras de cores

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	28,8	30,1	29,1	30,4	30,6	29,0	30,3	29,3	30,6	30,9
	3H	30,3	31,6	30,8	31,9	32,2	30,6	31,9	31,1	32,3	32,5
	4H	31,0	32,2	31,4	32,5	32,8	31,4	32,6	31,8	32,9	33,2
	6H	31,5	32,6	31,8	32,9	33,3	32,0	33,1	32,3	33,4	33,8
	8H	31,6	32,7	32,0	33,0	33,5	32,2	33,3	32,6	33,6	34,0
	12H	31,7	32,7	32,1	33,1	33,6	32,4	33,4	32,8	33,8	34,3
4H	2H	29,5	30,7	29,9	31,0	31,3	29,6	30,9	30,1	31,2	31,4
	3H	31,3	32,3	31,7	32,7	33,1	31,6	32,6	31,9	32,9	33,4
	4H	32,0	32,9	32,4	33,4	33,9	32,3	33,3	32,8	33,7	34,3
	6H	32,5	33,5	33,1	33,8	34,2	33,0	33,9	33,5	34,3	34,7
	8H	32,7	33,6	33,3	34,0	34,4	33,3	34,1	33,8	34,5	34,9
	12H	32,9	33,6	33,4	34,0	34,5	33,5	34,2	34,0	34,7	35,2
8H	4H	32,3	33,1	32,8	33,5	33,9	32,6	33,4	33,1	33,8	34,2
	6H	33,0	33,7	33,6	34,2	34,7	33,5	34,1	34,0	34,6	35,2
	8H	33,3	33,9	33,9	34,4	35,1	33,9	34,4	34,4	35,0	35,6
	12H	33,6	34,0	34,2	34,6	35,2	34,2	34,7	34,8	35,2	35,8
12H	4H	32,3	33,0	32,8	33,5	34,0	32,6	33,3	33,1	33,8	34,3
	6H	33,1	33,7	33,7	34,2	34,9	33,5	34,1	34,1	34,6	35,3
	8H	33,5	33,9	34,1	34,5	35,1	34,0	34,4	34,6	35,0	35,6
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,2				
S = 2.0H		0,4 / -0,4					0,3 / -0,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1060 lm total luminous flux											


Coeficiente de utilização

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	108	103	98	94	105	100	96	92	96	92	89	91	89	86	88	85	83	81
2	97	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69	67
3	89	78	69	62	86	76	68	62	73	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	59	52	64	57	51	62	55	50	59	54	49	47
5	74	61	52	45	72	60	51	45	57	50	44	55	49	43	53	47	43	40
6	68	55	46	39	66	54	45	39	52	44	38	50	43	38	48	42	37	35
7	63	50	41	34	62	49	40	34	47	39	34	45	39	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	42	35	30	40	34	29	28
9	55	41	33	27	54	41	33	27	39	32	27	38	32	27	37	31	27	25
10	52	38	30	25	50	38	30	25	36	29	24	35	29	24	34	28	24	22

Quantidade de luminárias

Luminaire budgetary diagram

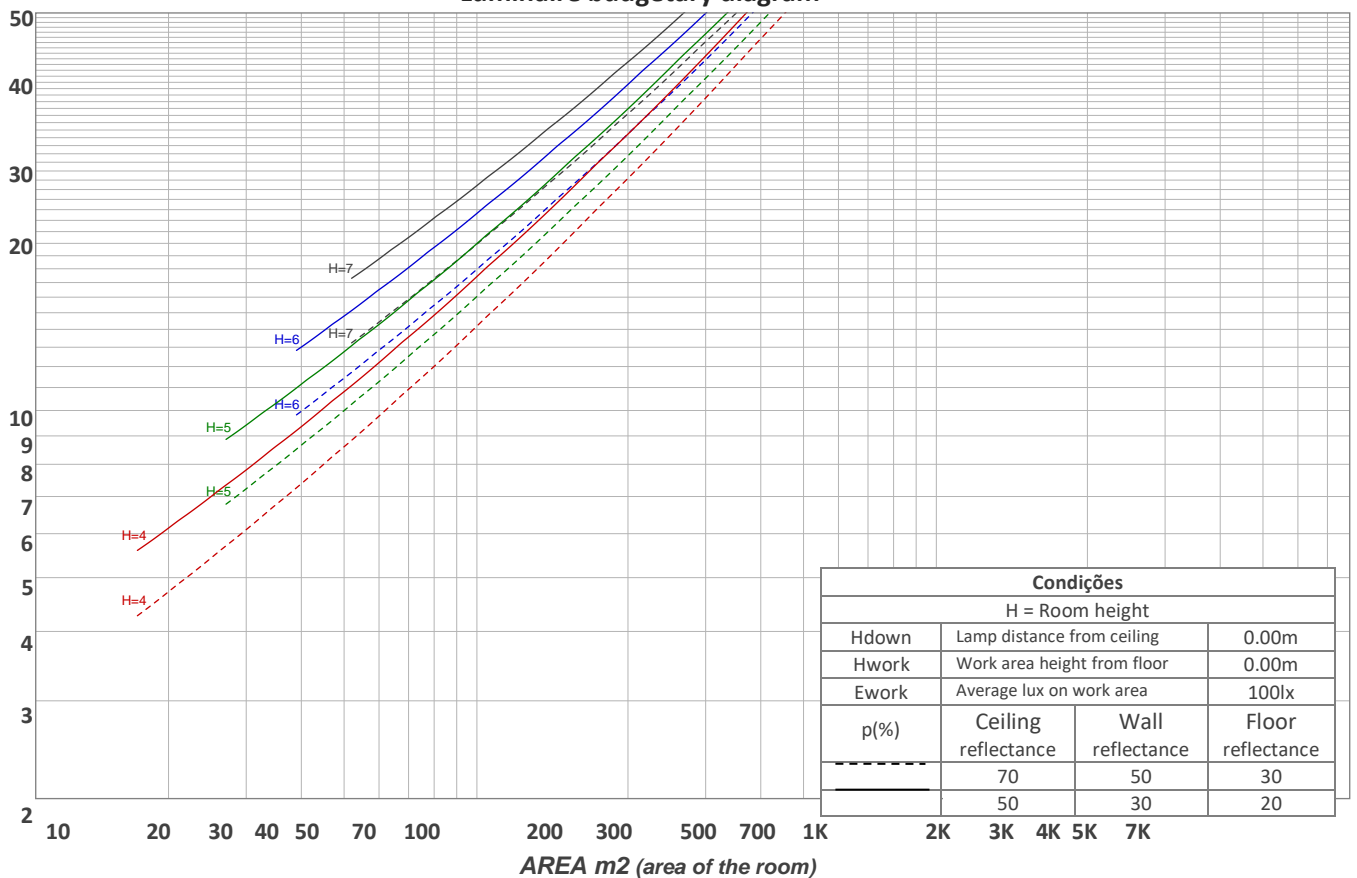

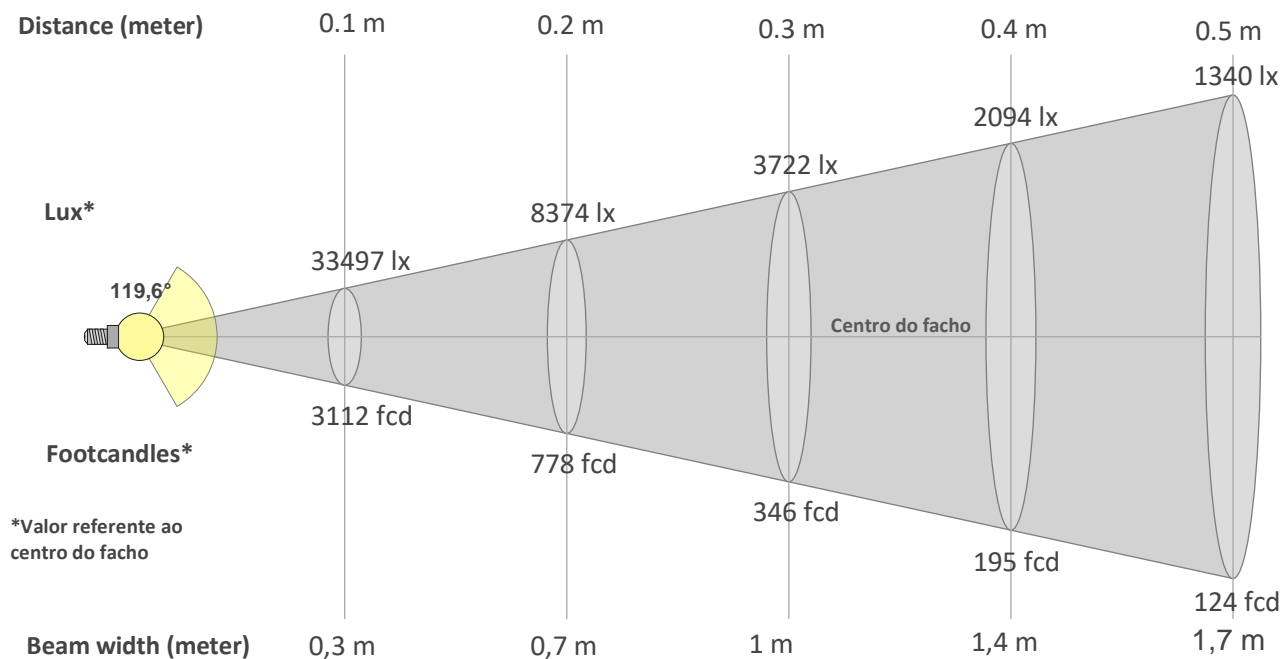

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
335lx	84lx	37lx	21lx	13lx	9lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
31,1fcd	7,8fcd	3,5fcd	1,9fcd	1,2fcd	0,9fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
335	334	330	325	316	306	293	278	261	241	218	194	168	140	110	80	51	26	7	1
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	65%	58%	50%	42%	33%	24%	15%	8%	2%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
335	333	330	324	315	304	291	275	257	237	215	190	164	136	107	77	50	27	12	5
100%	99%	98%	97%	94%	91%	87%	82%	77%	71%	64%	57%	49%	41%	32%	23%	15%	8%	4%	1%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
335	334	330	325	316	306	293	278	261	241	218	194	168	140	110	80	51	26	7	1
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	65%	58%	50%	42%	33%	24%	15%	8%	2%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
335	333	330	324	315	304	291	275	257	237	215	190	164	136	107	77	50	27	12	5
100%	99%	98%	97%	94%	91%	87%	82%	77%	71%	64%	57%	49%	41%	32%	23%	15%	8%	4%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
119,6°	167,4°	183,4°	74,8%	49,9%

iso-candela diagram

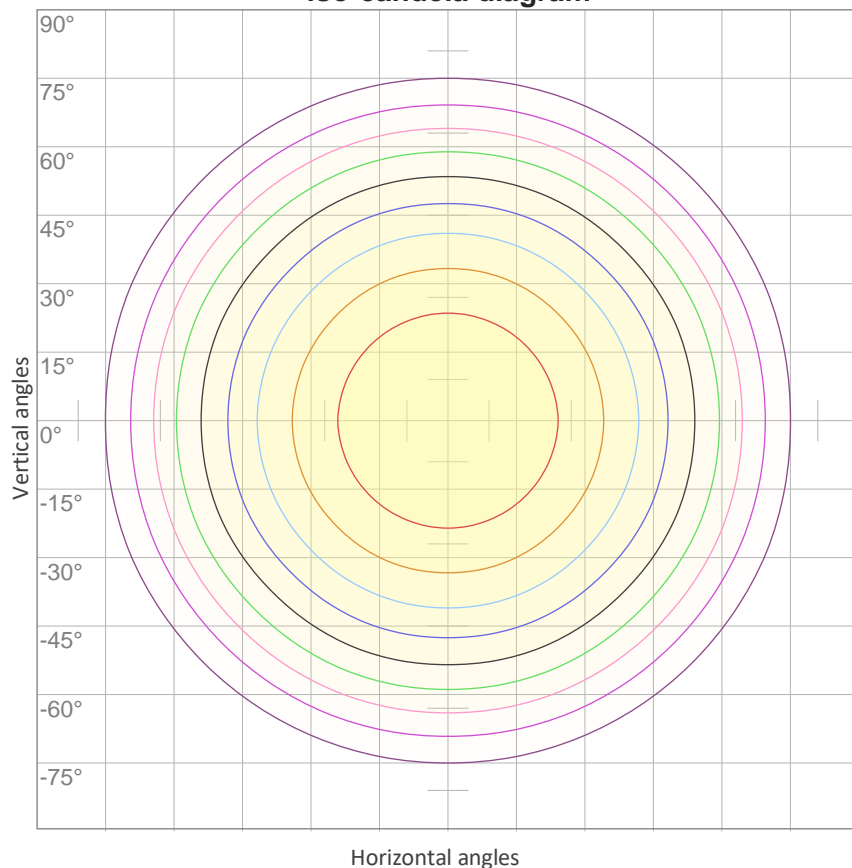


10%	33 cd
20%	67 cd
30%	100 cd
40%	134 cd
50%	167 cd
60%	201 cd
70%	234 cd
80%	268 cd
90%	301 cd

Conditions:

Number of c-planes: 16

Candela at center: 335 cd

iso-lux diagram

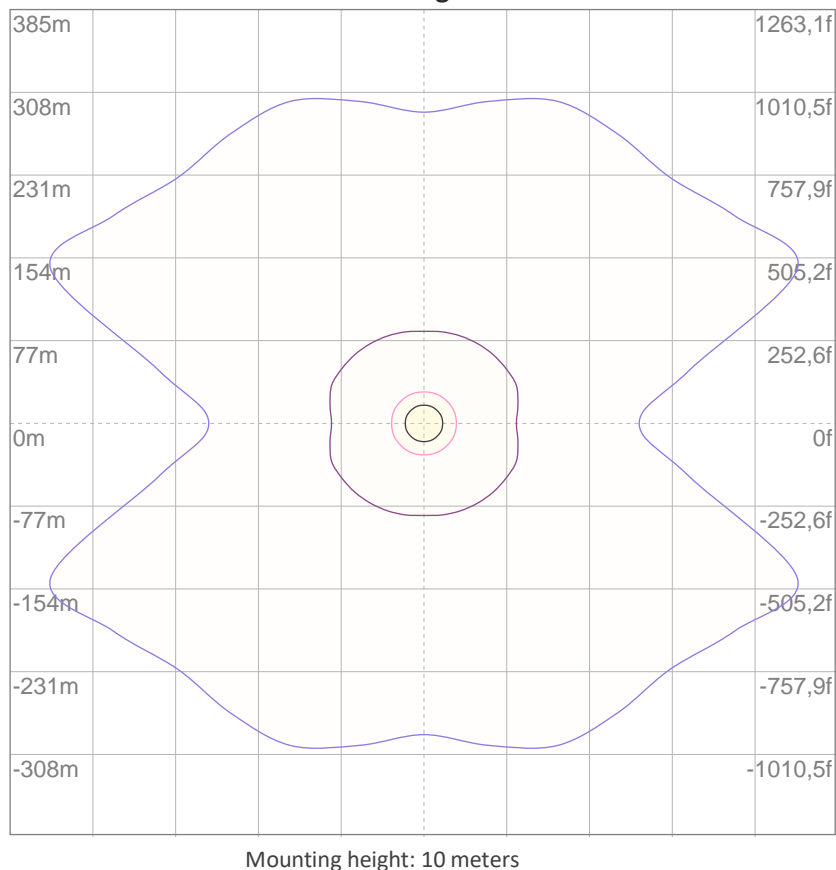

3%	0,100 lx
5%	0,167 lx
10%	0,335 lx
30%	1,00 lx
50%	1,67 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,35 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Potência

Vttagem: 12,0 V

Corrente: 0,800 A

Frequência: 0 Hz

FP: 1,0

THD



THD corrente: n/a

THD tensão: n/a